






REVISIONS				
ISS	ZONE	DESCRIPTION	PER REQUEST	DATE



RECOMMENDED  
CABLE STRIPPING DIM'S

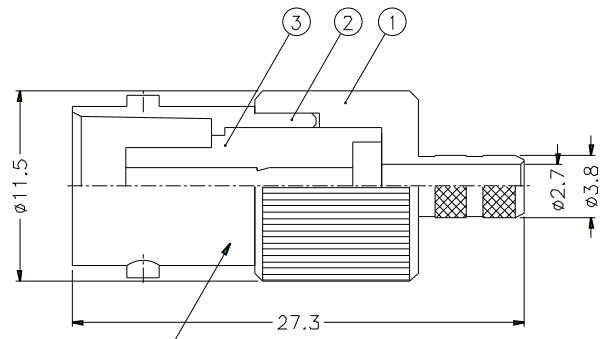

STAMP (IF ANY)

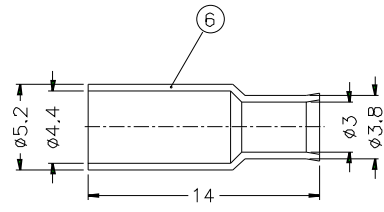

- NOTES, FINISH (PLATING THICKNESS IN MICRO-INCHES)
- BRASS PER QQ-B-626
  - NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
  - PHOSPHOR BRONZE PER QQ-B-750
  - GOLD PL. 3 MIN. THICK OVER NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
  - JIS H 3260, C 3501

- CRIMPED FERRULE  
HEX CRIMP SIZE .178"
- CRIMPED CONTACT PIN  
HEX CRIMP SIZE .068"

NO.	DESCRIPTION	MATERIAL	FINISH	QTY	DRAWING NO.	SCALE	3/1	ISSUE	A	FILE NO.
6	FERRULE	NOTE 5	NOTE 2	1	FR-52/44-38/3 X14					
5	SLEEVE	DELTRIN	NATURAL	1	SL-25/17X115					
4	CONTACT PIN	NOTE 3	NOTE 4	1	B74000-8-25/06					
3	INSULATOR	DELTRIN	NATURAL	1	B74050-3-50-B					
2	BODY	NOTE 1	NOTE 2	1	B74000-2					
1	HOUSING	NOTE 1	NOTE 2	1	B70002-1-38/27					

DIMENSIONS ARE IN MILLIMETERS		PART NO.	B6121E1-ND3G-5-50
UNLESS OTHERWISE SPECIFIED TOLERANCES		APPROVED	DATE
0.5-6	= ±0.2		10-11-01'
6-30	= ±0.4	CHECKED	DATE
30-120	= ±0.6		10-11-01'
120-315	= ±1	DRAWN	DATE
315-1000	= ±1.6		10-11-01'
1000-2000	= ±2.4		

<b>Amphenol</b>		TITLE	BNC CRIMP JACK (FOR RG-174/U,188A/U,316/U)
		DRAWING NO.	KJ-B6121E1-ND3G-316U-50
		ITEM NO.	