

# HUBER+SUHNER® DATA SHEET

## Coaxial Cable Connector: 11\_MMCX-50-2-1/111\_O


Rev.: B



### Description

Straight cable plug for semi-rigid cable

Interface standards  
SUHNER-MMCX

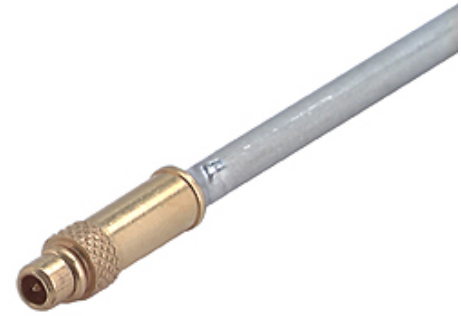

### Technical Data

#### Electrical Data

Impedance 50 Ω  
Interface frequency max. 6 GHz

#### Mechanical Data

Centre contact soldered  
Outer contact soldered  
Weight 0.0004 kg

#### Environmental Data

Operating Temperature -55 °C to 155 °C

#### Material Data

##### Piece Parts

Piece Parts	Material
Centre contact	Copper Beryllium Alloy
Outer contact	Brass
Body	Brass
Insulator	PFA / PTFE

##### Surface Plating

Centre contact	Gold Plating (Nickel underplated)
Outer contact	Gold Plating
Body	Gold Plating

#### Related Documents

Catalogue drawing	DOU-00006168
Assembly instruction	DOC-0000180170

#### Ordering Information

Bulk 100 pcs package	11_MMCX-50-2-1/111_OH
Single package	11_MMCX-50-2-1/111_OE

#### Additional Information

Suitable cable	EZ_86_TP_M17
----------------	--------------

HUBER+SUHNER is certified according to ISO 9001 and ISO 14001

#### WAIVER!

It is exclusively in written agreements that we provide our customers with warrants and representations as to the technical contained specifications and/or the fitness for any particular purpose. The facts and figures herein are carefully compiled to the best of our knowledge, but they are intended for general informational purposes only.



**HUBER+SUHNER AG**  
RF Technology  
9100 Herisau, Switzerland  
Phone +41 (0)71 353 41 11  
Fax +41 (0)71 353 45 90  
www.hubersuhner.com

**HUBER+SUHNER – Excellence in Connectivity Solutions**

Document: DOC-0000180168 I.00

Issued: 06.05.04

Uncontrolled Copy

Page 1/1