


REVISIONS		1-0504	SH 1
REV	DESCRIPTION	DATE	APPROVED
M	REVISED PER ECD 15888	6/16/05	BS

DASH NO	CABLES ACCOMMODATED	A HEX	ASSEMBLE PER	
-003	RG-174, 316	.178	TAI-221	
-004	RG-179, 187			
-005	NORTHERN ELECTRIC DBL-SHLD RG-187	.197		
-006	ECB75GPT, GRUMMAN DBL-SHLD RG-188			
-007	275-3991, MICRODDT			
-008	RG-195, -180 421-111, ESSEX	.178		
-009	821B, BELDEN 21-597, ESSEX YR23023, BELDEN			
-011	RG-58; RG-141; RG-303	.213		
-013	RG-59			
-013A	TCC-75-2			
-013B	RG-62	.255	TAI-C118	
-014	8212, BELDEN		TAI-221	
-015	730A, LUCENT	.290	TAI-C118	
-015A	RG-71			
-016	724, LUCENT 8281, BELDEN	.324	TAI-221	
-017	RG-6	.344		
-018	9268, BELDEN			
-019	8279, BELDEN	.255		
-020	9248, BELDEN	.290		
-022	88241, 88269, BELDEN	.255		TAI-C118
-023	89108, BELDEN			TAI-221
-024	89120, BELDEN	.290		
-025	734A, LUCENT	.255		TAI-243
-026	735A, LUCENT	.178		TAI-221
-027	KS19224L2, LUCENT		TAI-221	
-030	32448A, DRAKA	.324	TAI-231	
-054	1725A/B AVAYA	.344	TAI-231	

RED INDICATES ORIGINAL

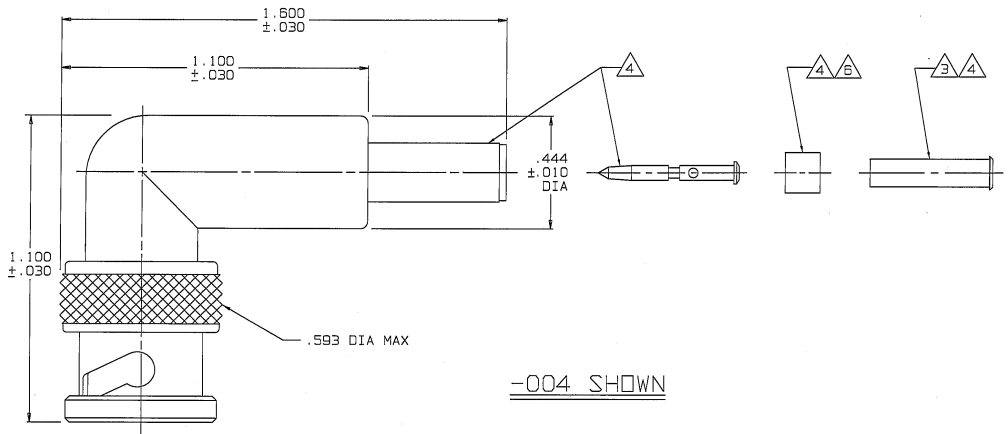

7. EXAMPLE OF COMPLETE MODEL NUMBER:
 UPLR220 - 025
 BASIC MODEL NUMBER DASH NUMBER (CABLE GROUP)

- Ⓐ CONTACT SUPPORT BUSHING REQD
-013B, -015A & -022 ONLY
- 5. RF COAXIAL 75 OHM BNC FULL
CRIMP RIGHT ANGLE CABLE PLUG
- Ⓐ PIN, SLEEVE, CRIMP SLEEVE & CONTACT SUPPORT
BUSHING ARE SUPPLIED LOOSE
- Ⓐ SLEEVE REQUIRED ON -003 THRU -007 & -027 ONLY
- 2. FINISH: TFS-1A (NICKEL)
- 1. ALL DIM ARE IN INCHES

Ⓐ UPLR220-02#-X USE 8-3349 CRIMP SLEEVE

TROMPETER DRAWING PER MIL-STD-883C DIMENSIONS ARE IN INCHES UNLESS OTHERWISE SPECIFIED		TOL. UNLESS SPECIFIED XX XXX ± .005 XXXX ANGLES	
DRAWN AAH	DATE 8-7-05	MATERIAL	TITLE UPLR220
REVISED 1-15	DATE 6/19/05	FINISH	SIZE CAGE CODE DRAWING NO. REV. B 14949 1-0504 M
APPROVED BS	DATE 6/15/05	SCALE 4/1	DATE 3-11-94
NEXT ASSY 1-0504M		DO NOT SCALE DIMS	SHEET 1C