


DASH NO.	M CODE	MADE FROM
----------	--------	-----------

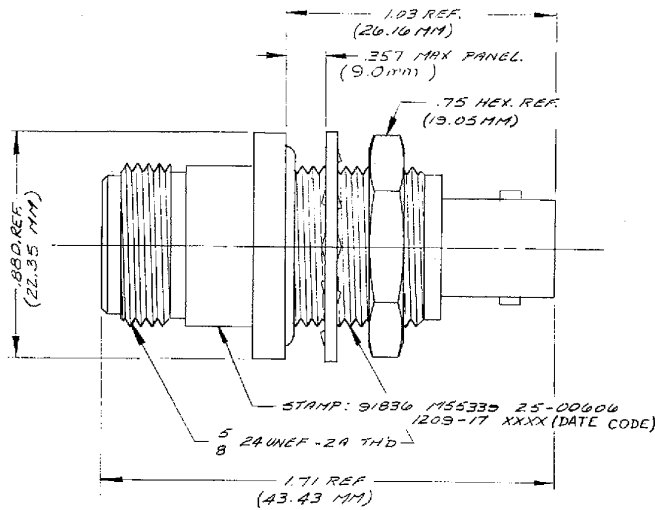

GSD

REVISIONS	
ISSUE	CHANGES
3	CN 23170E MA 18 MAR 82
4	CN 28968A AMD 15 JUN 87
5	CN 29305 A LI 70CT87
6	CN 32904 C KH 18 MAR 91
7	CN 34182 C KH 28 OCT 92
8	CN 35618 D ME 10 JAN 95
9	CN 36030 C KH 31 JAN 95

90000-57/65554

GSD

SCALE	
APPROX SURFACE AREA	1209-17
USED ON	
PLT	
PRESSURIZED BULKHEAD ADAPTER BNL(F)-N(1)	
DRAWN	CT
DATE	09NOV86
APPN	DATE
APPN	DATE
 155339/25-00606	

NOTES:

1. MATERIALS:

- LOCKWASHER — PHOSPHOR BRONZE, ASTM-B-103
- CENTER CONTACT — BER. COPPER, ASTM-B-196
- INSULATORS — TEFLON, ASTM-D-4894
- L-RING — HARD DRAWN COPPER WIRE, PER QQ-W-330.
- O-RING — SYNTHETIC RUBBER, PER MIL-P-25732.
- O-RINGS — PARKER COMPOUND, 5-317-G.
- ALL OTHER METAL PARTS — BRASS, ASTM-B16

2. FINISHES

- CENTER CONTACT — HARD GOLD PER MIL-G-4520A.
- ALL OTHER METAL PARTS — SILVER PLT PER QQ-S-365.

3. ELECTRICAL CHARACTERISTICS:

- NOMINAL IMPEDANCE — 50 Ω.
- WORKING VOLTAGE — 500 VOLTS RMS.
- FREQUENCY RANGE — DC TO 10GHz.

4. ENVIRONMENTAL:

- SEAL — 30 PSI

UNLESS OTHERWISE SPECIFIED:

- | | |
|---|--|
| 1. TOLERANCES, FRACTIONS & 2 PLACE DECIMALS ± .010 | 2. REMOVE ALL BURRS, BREAK SHARP EDGES .005 MAX. |
| 3 PLACE DECIMALS ± .004 | 3. NO FILLETS PERMITTED. |
| 1. R. CONCENTRICITY OF ANY 2 DIAMETERS MAY NOT EXCEED HALF THE SUM OF THEIR TOLERANCES. | 4. SURFACE ROUGHNESS 83 MICRONS RMS MAX. |
| | 5. ALL DIMENSIONS PRIOR TO PLATING. |
| | 6. ALL PLATING IN ACCORDANCE WITH KER 10004. |