REV.	DATE	DESCRIPTION
NC	02/11/03	INITIAL RELEASE

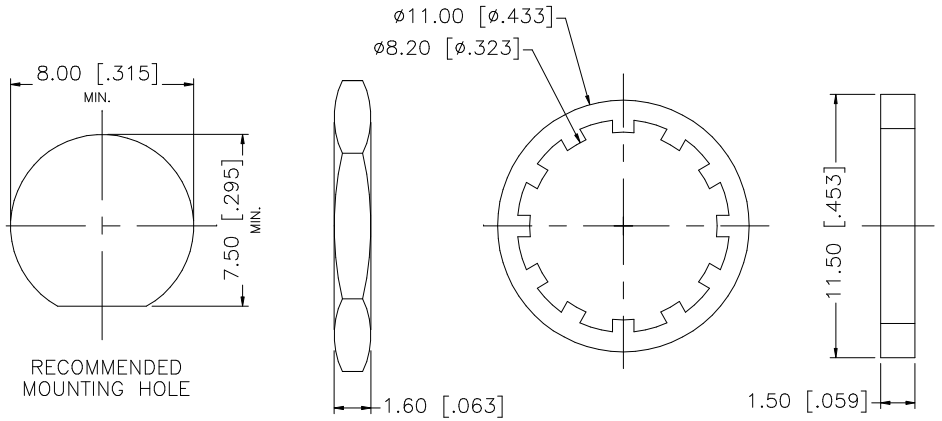

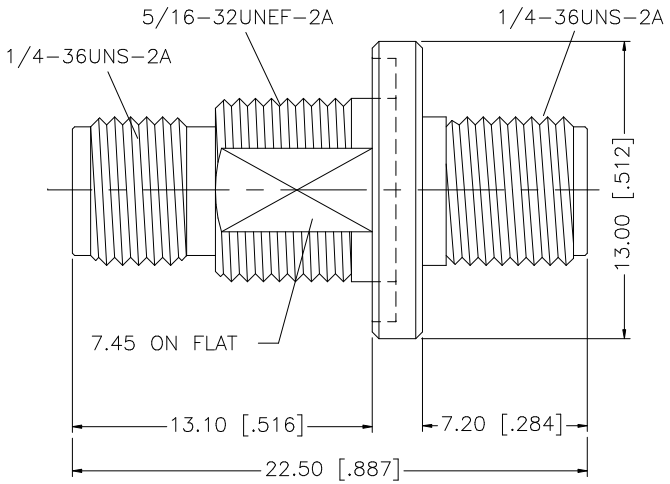

NOTE:

1. MAX. PANEL THICKNESS = 4.3mm

8				
7				
6				
5	HEX NUT	BRASS	GOLD	1
4	LOCK WASHER	BRASS	GOLD	1
3	CONTACT PIN	BER. COPPER	GOLD	1
2	INSULATOR	TEFLON	NATURAL	1
1	BODY	BRASS	GOLD	1
	DESCRIPTION	MATERIAL	FINISH	QTY

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [ ] ARE IN INCHES AND FOR CUSTOMER REFERANCE ONLY.

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE:

0.5 – 8mm ± 0.20mm
8 – 30mm ± 0.40mm
30 – 120mm ± 0.50mm

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE:

.020 – .315 = ± 0.007"
.315 – 1.180 = ± 0.015"
1.180 – 4.724 = ± 0.020"

DO NOT SCALE DRAWING

APPROVALS	DATE
DRAWN G.R.S.	02/11/03
CHECKED	
ISSUED	
SHEET 1 OF 1	

CAD FILE C:/132/132170–10.DWG

Amphenol Connex

PART DESCRIPTION

SMA BULKHEAD FEMALE TO FEMALE ADAPTER WITH O–RING SEAL

PART NO. 132170–10

DWG. NO.	REV.	SIZE	SCALE
132170–10.DWG	NC	A	NA

Downloaded from Elcodis.com electronic components distributor