


ALL RIGHTS RESERVED. NO PORTION OF THIS PUBLICATION, WHETHER IN WHOLE OR IN PART CAN BE REPRODUCED WITHOUT THE EXPRESS WRITTEN CONSENT OF SPC TECHNOLOGY.

REVISIONS		DOC. NO.	SPC-F005	Effective:	12/21/98	DCP No:	800	
DCP #	REV	DESCRIPTION	DRAWN	DATE	CHECKD	DATE	APPRVD	DATE
830	B	Updated Redrawn	JWM	3/16/02	JC	3/16/01	JC	3/16/01
1319	C	Dimensions Added	HO	2/14/02	JC	2/14/02	JC	2/14/02

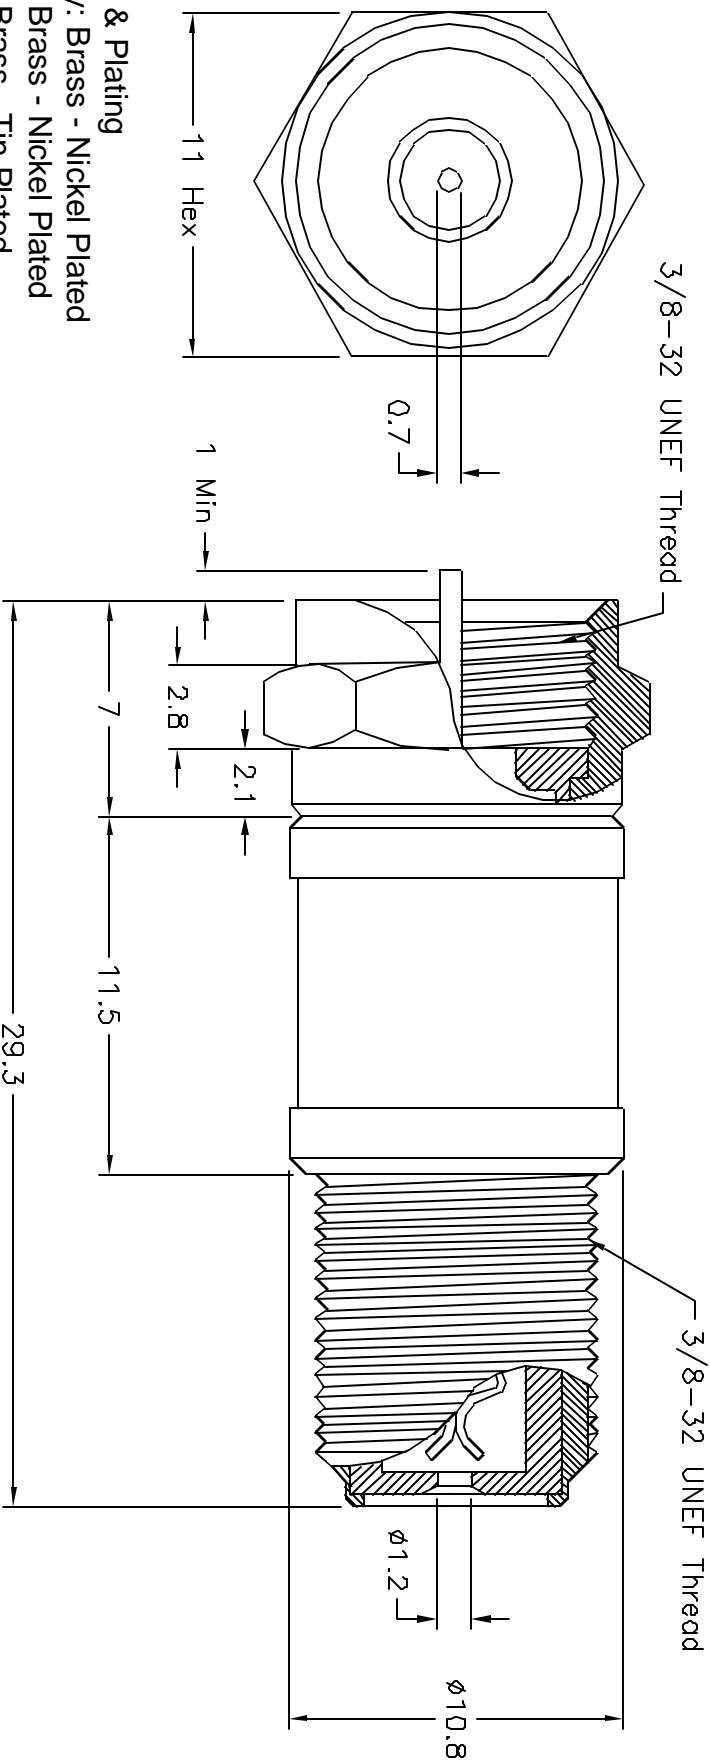

NOTES:

1. Material & Plating
 Body: Brass - Nickel Plated
 Nut: Brass - Nickel Plated
 Pin: Brass - Tin Plated
 Contact Pin: Phosphor Bronze - Tin 2.
 Plated
 Dielectric: PE
3. Working Voltage: DC 50V or AC 30V
4. Voltage Standing: DC 500V
5. Insertion Loss: 5 ~ 1000MHz <-0.5dB

DISCLAIMER
 ALL STATEMENTS AND TECHNICAL INFORMATION CONTAINED HEREIN ARE BASED UPON INFORMATION AND/OR TESTS WE BELIEVE TO BE ACCURATE AND RELIABLE. SINCE CONDITIONS OF USE ARE BEYOND OUR CONTROL, THE USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT FOR THE INTENDED USE AND ASSUME ALL RISK AND LIABILITY WHATSOEVER IN CONNECTION THEREWITH.



SPC TECHNOLOGY

UNLESS OTHERWISE

SPECIFIED,
 DIMENSIONS ARE
 FOR REFERENCE
 PURPOSES ONLY.

DRAWN BY:	DATE:
Jeff McVicker	8/17/98
CHECKED BY:	DATE:
JOHN COLE	8/18/98
APPROVED BY:	DATE:
Daniel Carey	8/18/98

DRAWING TITLE:

"F" Female to "F" Male Voltage Blocking Coupler

SIZE DWG. NO.

A 1592

ELECTRONIC FILE

92N3416.dwg

REV

C

SCALE: NTS

U.O.M.: Millimeters

SHEET: 1 OF 1