


ALL RIGHTS RESERVED. NO PORTION OF THIS PUBLICATION, WHETHER IN WHOLE OR IN PART CAN BE REPRODUCED WITHOUT THE EXPRESS WRITTEN CONSENT OF SPC TECHNOLOGY.

SPC-F006.DWG

REVISIONS		DOC. NO. SPC-F006	Effective 7/8/02	DCP No. 1308				
DCP #	REV	DESCRIPTION	DRAWN	DATE	CHECKD	DATE	APPRVD	DATE
1902	A	RELEASED	EO	05/08/06	TL	08/15/06	HO	08/15/06

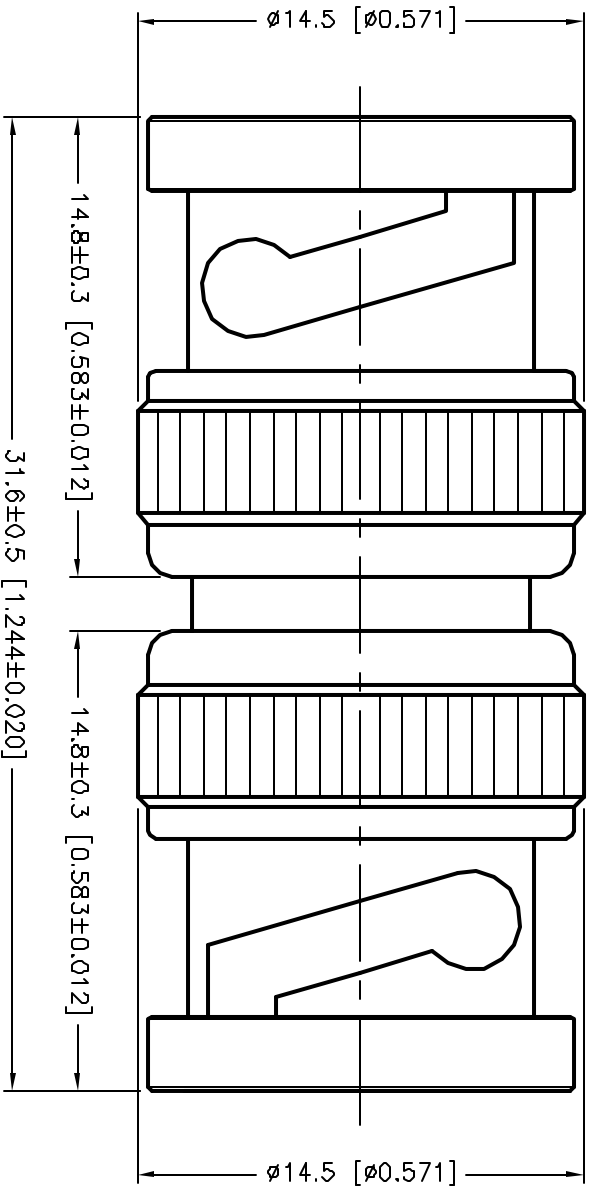

NO	DESCRIPTION	MATERIAL	QTY	FINISH
8	WASHER	BRASS	2	NICKEL 100 μ " MIN.
7	CENTER CONTACT	BRASS	1	GOLD
6	BODY	BRASS	1	NICKEL 100 μ " MIN.
5	WASHER	BRASS	2	NICKEL 100 μ " MIN.
4	SPRING WSHR	SK-5	2	NICKEL 100 μ " MIN.
3	GASKET	RUBBER	2	NONE
2	INSULATION	POW	2	NONE
1	SHELL	ZINC	2	NICKEL 100 μ " MIN.

- SPECIFICATIONS:**
- 1- BODIES: BRASS PER JIS-C3604
 - 2- CENTER CONTACT: BRASS PER JIS-C3604
 - 3- CONNECTOR INTERFACE PER MIL-STD-348A
 - 4- PART TO BE CLEAN AND FREE OF BURRS

TOLERANCES:

.X = ± 0.2
.XX = ± 0.1
.XXX = ± 0.05
ANGLE = $\pm 5^\circ$

DRAWN BY:

DATE:

EKLAS ODISH

05/08/06

CHECKED BY:

DATE:

THOMAS LEE

06/15/06

APPROVED BY:

DATE:

HISHAM ODISH

06/15/06

DRAWING TITLE:

BNC Coax Adapter, Male/Male, 50 Ohms

SIZE DWG. NO.

A SPC20105

ELECTRONIC FILE

82K9785.DWG

REV

A

SCALE:

NTS

U.O.M.: mm [Inches]

SHEET:

1 OF 1

DISCLAIMER:
ALL STATEMENTS AND TECHNICAL INFORMATION CONTAINED HEREIN ARE BASED UPON INFORMATION AND/OR TESTS WE BELIEVE TO BE ACCURATE AND RELIABLE. SINCE CONDITIONS OF USE ARE BEYOND OUR CONTROL, THE USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT FOR THE INTENDED USE AND ASSUME ALL RISK AND LIABILITY WHATSOEVER IN CONNECTION THEREWITH.