


ALL RIGHTS RESERVED. NO PORTION OF THIS PUBLICATION, WHETHER IN WHOLE OR IN PART CAN BE REPRODUCED WITHOUT THE EXPRESS WRITTEN CONSENT OF SPC TECHNOLOGY.

	REVISIONS			DOC. NO. SPC-F005 * Effective: 7/8/02 * DCP No: 1398						
	DCP #	REV	DESCRIPTION	DRAWN	DATE	CHECKD	DATE	APPRVD	DATE	
ĺ	1902	Α	RELEASED	EO	05/08/06	TL	06/15/06	но	06/15/06	



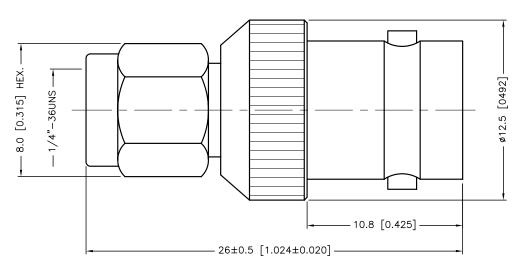

NO	DESCRIPTION	MATERIAL	Q'TY	FINISH
1	SHELL	BRASS	1	NICKEL 100 μ "MIN.
2	GASKET	SILICONE	1	RED
3	WASHER	STAINLESS STEEL	1	NONE
4	INSULATION	TEFLON	1	NONE
5	BODY	BRASS	1	NICKEL 100 μ "MIN.
6	CENTER CONTACT	BRASS	1	GOLD
7	WASHER	BRASS	1	NICKEL 100 μ "MIN.

SPECIFICATIONS:
1- BODIES: BRASS PER JIS-C3604
2- CENTER CONTACT: BRASS PER JIS-C3604
3- INSULATION: TEFLON PER ASTM D1457 AND ASTM D1710
4- CONNECTOR INTERFACE PER MIL-STD-348A

5- PART TO BE CLEAN AND FREE OF BURRS

DISCLAIMER:
ALL STATEMENTS AND TECHNICAL INFORMATION CONTAINED
HEREIN ARE BASED UPON INFORMATION AND/OR TESTS WE
BELIEVE TO BE ACCURATE AND RELIABLE. SINCE
CONDITIONS OF USE ARE BEYOND OUR CONTROL, THE
USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT
FOR THE INTENDED USE AND ASSUME ALL RISK AND
LIABILITY WHATSOEVER IN CONNECTION THEREWITH.

 $.X = \pm 0.2$ $.XX=\pm0.1$.XXX=±0.05 ANGLE=±5°

TOLERANCES:

DRAWN BY: DATE: EKLAS ODISH 05/08/06 CHECKED BY: DATE: THOMAS LEE 06/15/06 DATE: APPROVED BY: HISHAM ODISH 06/15/06

DRAWING TITLE:
Coaxial Adapter, SMA Male To BNC Female, 50 Ohms ELECTRONIC FILE DWG. NO. Α SPC20112 82K9792.DWG Α U.O.M.: mm [Inches] SCALE: NTS SHEET: 1 OF 1