


ALL RIGHTS RESERVED. NO PORTION OF THIS PUBLICATION, WHETHER IN WHOLE OR IN PART CAN BE REPRODUCED WITHOUT THE EXPRESS WRITTEN CONSENT OF SPC TECHNOLOGY.

REVISIONS		DOC. NO.	SPC-F005	Effective:	12/21/98	Doc No.	800
DOP #	REV	DESCRIPTION	DRAWN	DATE	CHECKD	DATE	APPRVD
809	A	RELEASED	HYO	11/18/99	JC	11/23/99	DJC

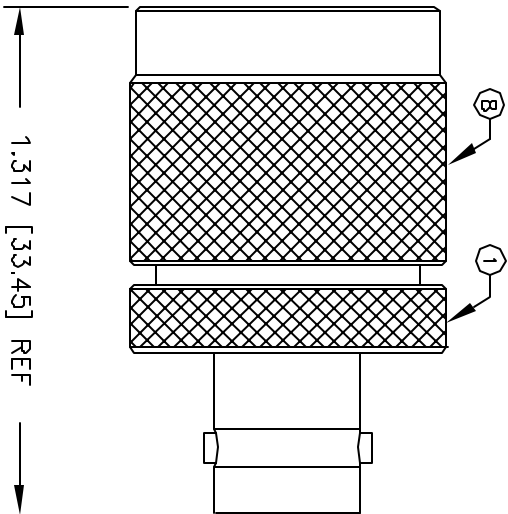

ITEM	DESCRIPTION	QTY	MATERIAL	FINISH
8	SHELL	1	BRASS	SILVER
7	GASKET	1	S.I. RUBBER	RED
6	RETAINING RING	1	SK-5	NONE
5	GROUND RING	1	BRASS	SILVER
4	DIELECTRIC	1	TEFLON	NONE
3	DIELECTRIC	1	TEFLON	NONE
2	PIN	1	BRASS	GOLD
1	BODY	1	BRASS	SILVER

SPECIFICATIONS:
IMPEDANCE: 50 OHMS
WORKING VOLTAGE: 500 VRMS @ SEA
LEVEL FREQUENCY RANGE: 0-4 GHZ
INTERFACE PER MIL-STD-348, SECTION
301.2 & 304.1

DISCLAIMER
 ALL STATEMENTS AND TECHNICAL INFORMATION CONTAINED HEREIN ARE BASED UPON INFORMATION AND/OR TESTS WE BELIEVE TO BE ACCURATE AND RELIABLE. SINCE CONDITIONS OF USE ARE BEYOND OUR CONTROL, THE USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT FOR THE INTENDED USE AND ASSUME ALL RISK AND LIABILITY WHATSOEVER IN CONNECTION THEREWITH.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE FOR REFERENCE PURPOSES ONLY.

DRAWN BY:	DATE:
HISHAM ODISH	11/18/99
CHECKED BY:	DATE:
JOHN COLE	11/23/99
APPROVED BY:	DATE:
DANIEL CAREY	12/28/99



SPC TECHNOLOGY

DRAWING TITLE: N Male to BNC Female Adapter

SIZE	DWG. NO.	ELECTRONIC FILE	REV
A	SPC4268	84N1257.DWG	A
SCALE:	NTS	U.O.M.: INCHES [mm]	SHEET: 1 OF 1