



GSD

UG-492D/U

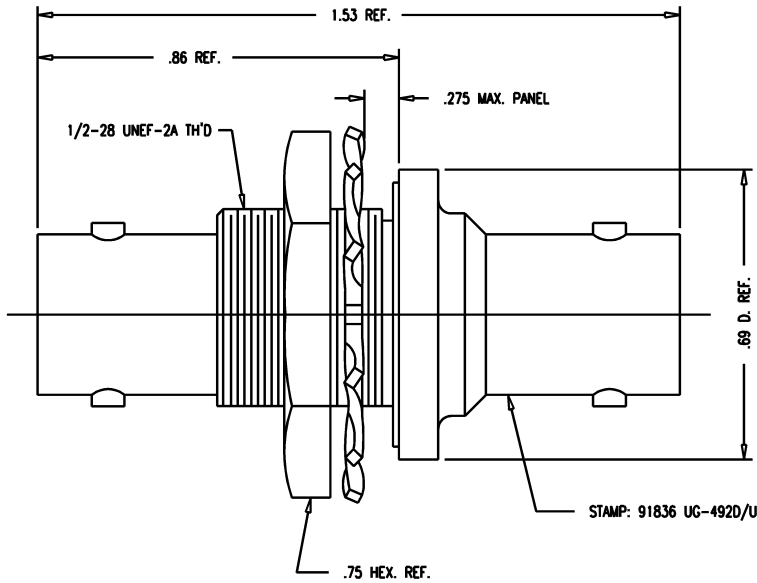

NOTES:

1. INTERFACE PER MIL-STD-348, FIG. 301-2.
2. MATERIALS:
 INSULATORS-TEFLON, ASTM-D-1457
 GASKET-SILICONE RUBBER, ZZ-R-765
 CENTER CONTACTS- BER. COP., ASTM-B-196
 LOCKWASHER-PHOSPHOR BRONZE, QQ-B-750
 ALL OTHER METAL PARTS-BRASS, ASTM-B16
3. FINISHES:
 ALL METAL PARTS- SILVER PLATE PER QQ-S-365
4. ELECTRICAL CHARACTERISTICS:
 NOMINAL IMPEDANCE-50 OHMS
 WORKING VOLTAGE-500 VRMS
 FREQUENCY RANGE-DC TO 4 GHZ
5. ENVIRONMENTAL:
 UNIT WILL SHOW NO LEAKAGE AT 50 P.S.I.
 LEAKAGE RATE SHALL NOT EXCEED 1×10^{-7} cc/sec OF
 TRACER GAS AT ATMOSPHERIC PRESSURE.

REVISIONS	
ISSUE	CHANGES
10	CN 20565 D KOR 05/12/80

SCALE 4:1

APPROX SURFACE AREA

KC-96-01

USED ON

REF: MS 35177 REV. J

ADAPTER, F-F, BULKHEAD,
HERMETIC SEAL, BNC

DESIGN JCA DATE 01/24/92

APPR. MJB DATE 01/27/92

DATE

KINGS
ELECTRONICS CO., INC.
TUCKAHOE, NEW YORK 10707

UG-492D/U

GSD

JCA2482