



ALL RIGHTS RESERVED. NO PORTION OF THIS PUBLICATION, WHETHER IN WHOLE OR IN PART CAN BE REPRODUCED WITHOUT THE EXPRESS WRITTEN CONSENT OF SPC TECHNOLOGY.

SPC-F005.DWG

REVISIONS			DOC. NO. SPC-F005 * Effective: 7/8/02 * DCP No: 1398					
DCP #	REV	DESCRIPTION	DRAWN	DATE	CHECKD	DATE	APPRVD	DATE
1969	Α	RELEASED	JN	07/09/09	JWM	07/09/09	JWM	07/09/09

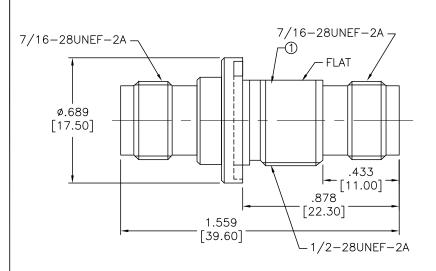

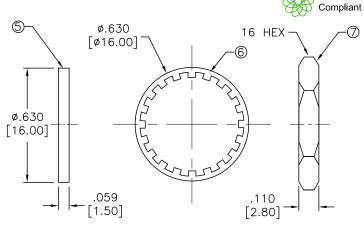

SPECIFICATIONS:

-IMPEDIANCE: 50 OHMS

- -FREQUENCY RANGE: 0-7 GHz
- -VSWR: < 1.10:1 UP TO 5 GHz
- -WORKING VOLTAGE: 500 v rms @ SEA LEVEL
- -INSULATION RESISTANCE: 5k M ohms min.
- -TEMPERATURE RANGE: -65°c TO 165°c (GASKET 85°c MAX)

ø.512 [13.00] + .476 [12.00] RoHS

RECOMMENDED CUTOUT

	1	BODY	1	BRASS	NICKEL, 100μ"
		BODY	1	BRASS	NICKEL, 100μ"
		INSULATOR	1	PTFE	WHITE
	4	CONTACT	1	PHOS. B.	GOLD, 3μ"
	5	GASKET	1	RUBBER	RED
	6	LOCK WASHER	1	BRASS	NICKEL, 100μ"
	7	HEX NUT	1	BRASS	NICKEL, 100μ"
	#	DESCRIPTION	QTY	MATRL	FINISH

DISCLAIMER:
ALL STATEMENTS AND TECHNICAL INFORMATION CONTAINED
HEREIN ARE BASED UPON INFORMATION AND/OR TESTS WE
BELIEVE TO BE ACCURATE AND RELIABLE. SINCE
CONDITIONS OF USE ARE BEYOND OUR CONTROL, THE
USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT
FOR THE INTENDED USE AND ASSUME ALL RISK AND
LIABILITY WHATSOEVER IN CONNECTION THEREWITH.

TOLERANCES:

UNLESS OTHERWISE
SPECIFIED,
DIMENSIONS ARE
FOR REFERENCE
PURPOSES ONLY.

DRAWN BY:	DATE:	Γ		
Jason Nash	07/09/09			
CHECKED BY:	DATE:			
Jeff McVicker	07/09/09	l		
APPROVED BY:	DATE:	ŀ		
Jeff McVicker	07/09/09			

9	DRAWING TITLE: Bulkhead adapter, TNC Jack to TNC Jack								
	SIZE	DWG. NO.		ELEC.	TRONIC FILI	Ε	REV		
9	Α	SPC33235			07R8002.dwg				
SCALE: NTS			U.O.M.: INCHES [mm]		SHEET:	1 OF	- 1		