


NO	DESCRIPTION	DATE
△	BACKGROUND FORMAT UPDATED	04.25.03'
△	MODIFICATION PART ⑤⑥	10.21.06'
△	BACKGROUND FORMAT UPDATED	10.30.08'
△	DEL INTERFACE -65°C TO +165° C → -20°C TO +60° C	03.01.10'

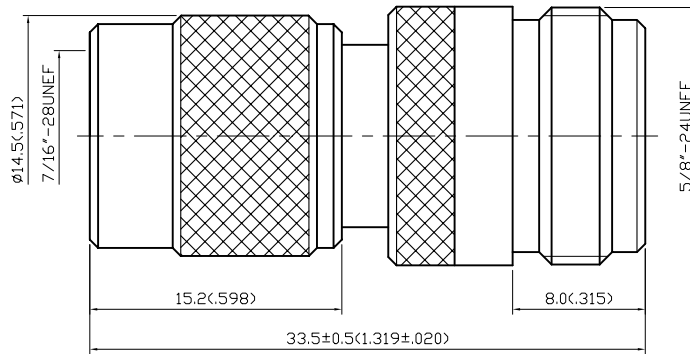

1.0 ELECTRICAL

- 1.1 FREQUENCY RANGE: DC-11 GHz
- 1.2 NOMINAL IMPEDANCE: 50 OHM
- 1.3 WORKING VOLTAGE: 500 VOLTS MAX.
- 1.4 PROOF VOLTAGE: 1500 VOLTS

2.0 MATERIALS

- 2.1 BODIES: BRASS PER JIS-C3604
- 2.2 CENTER CONTACT: BRASS PER JIS-C3604

3.0 FINISHES AND OTHERS

- 3.1 SEE BELOW TABLE FOR DETAILS.

4.0 ENVIRONMENTAL

- 4.1 OPERATING TEMPERATURE RANGE: -20° C TO +60° C △

8	CHASSIS	BRASS	1	NICKEL 100 μ" MIN.
7	INSULATION	POM	1	NONE
6	CENTER CONTACT	BRASS	1	GOLD
5	BODY	BRASS	1	NICKEL 100 μ" MIN.
4	WASHER	BRASS	1	NONE
3	SHELL	BRASS	1	NICKEL 100 μ" MIN.
2	GASKET	RUBBER	1	RED
1	INSULATION	POM	1	NONE
NO	DESCRIPTION	MATERIAL	Q'TY	FINISH

APPROVED by _____ DATE: _____

DESCRIPTION		TNC PLUG-N JACK	
製圖	DRAWN <i>Yoko</i>	TOLERANCE	品名 15-44 D.G.N
檢圖	CHECK <i>Arc</i>	.X ±0.2 .XX ±0.1	ROHS COMPLIANT (50Ω) DATE 10.20.92' 版次 A-4
認定	APPROVAL <i>Lewis</i>	.XXX ±0.05 ANGLE ±5°	UNIT mm(in) DWG.NO. 15-0132
		SCALE 4:1	佳楠精密電子股份有限公司 CHIN NAN PRECISION ELECTRONICS CO.,LTD.