


NO	DESCRIPTION	DATE
△	BACKGROUND FORMAT UPDATED	07.17.02'
△	BACKGROUND FORMAT UPDATED	08.25.08'
△	ADD INTERFACE	06.11.10'

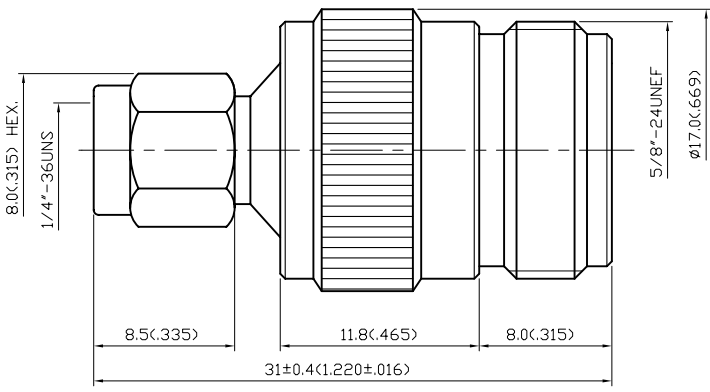

1.0 ELECTRICAL

- 1.1 FREQUENCY RANGE: DC-11 GHz
- 1.2 NOMINAL IMPEDANCE: 50 OHMS
- 1.3 WORKING VOLTAGE: 500 VOLTS MAX.
- 1.4 PROOF VOLTAGE: 1000 VOLTS
- 1.5 VSWR: 1.3 MAX.

2.0 MATERIALS

- 2.1 BODIES: BRASS PER JIS-C3604
- 2.2 CENTER CONTACT: BRASS PER JIS-C3604
- 2.3 INSULATION: TEFLON PER ASTM D1457 AND ASTM D1710

3.0 FINISHES AND OTHERS

3.1 SEE BELOW TABLE FOR DETAILS.

4.0 MECHANICAL

- 4.1 INTERFACE IN ACCORDANCE WITH: MIL-STD-348A △
- 4.2 RECOMMENDED COUPLING TORQUE: 3 TO 5 in-lbs

5.0 ENVIRONMENTAL

5.1 OPERATING TEMPERATURE RANGE: -65° C TO +165° C

APPROVED

by _____ DATE: _____

7	CENTER CONTACT	BRASS	1	GOLD
6	BODY II	BRASS	1	NICKEL 100μ" MIN.
5	BODY I	BRASS	1	NICKEL 100μ" MIN.
4	INSULATION	TEFLON	1	NONE
3	WASHER	STAINLESS STEEL	1	NONE
2	GASKET	SILICONE	1	RED
1	SHELL	BRASS	1	NICKEL 100μ" MIN.
NO	DESCRIPTION	MATERIAL	Q'TY	FINISH

DESCRIPTION		SMA PLUG-N JACK	
製圖	DRAWN	TOLERANCE	品名
檢圖	CHECK	單位	UNIT
認定	APPROVAL	比例	SCALE
		DATE	版次
		REV.	

19-25-2 T.G.N
 \ROHS COMPLIANT (50Ω)
 11.01.95'
 A-3
 DWG.NO. 19-0121
 佳楠精密電子股份有限公司
 CHIN NAN PRECISION ELECTRONICS CO.,LTD.