


NO	DESCRIPTION	DATE
1	BACKGROUND FORMAT UPDATED	04.27.10

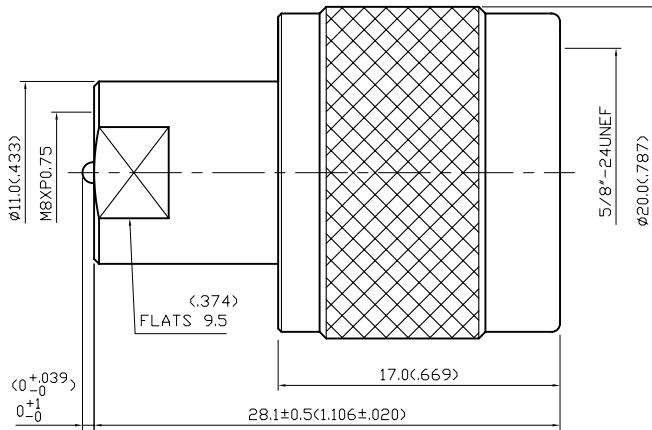

1.0 ELECTRICAL

- 1.1 FREQUENCY RANGE: DC-900 MHz
- 1.2 NOMINAL IMPEDANCE: 50 OHM

2.0 MATERIALS

- 2.1 BODIES: BRASS PER JIS-C3604
- 2.2 CENTER CONTACT: BRASS PER JIS-C3604
- 2.3 INSULATION: TEFLON PER ASTM D1457 AND ASTM D1710

3.0 FINISHES AND OTHERS

- 3.1 SEE BELOW TABLE FOR DETAILS.

4.0 ENVIRONMENTAL

- 4.1 OPERATING TEMPERATURE RANGE: -55° C TO +125° C

NO	DESCRIPTION	MATERIAL	Q'TY	FINISH
8	SHELL	BRASS	1	NICKEL 100 μ" MIN.
7	CHASSIS	BRASS	1	NICKEL 100 μ" MIN.
6	CENTER CONTACT	BRASS	1	GOLD
5	GASKET	SILICONE	1	RED
4	WASHER	BRASS	1	NONE
3	INSULATION	TEFLON	1	NONE
2	INSULATION	TEFLON	1	NONE
1	BODY	BRASS	1	NICKEL 100 μ" MIN.

APPROVED by _____ DATE: _____

DESCRIPTION		FME PLUG - N PLUG	
製圖	DRAWN	TOLERANCE	品名
Yoko	.X	±0.2	23-09 T.G.N
檢圖	CHECK	.XX	±0.1
Jacky	.XXX	±0.05	單位
認	APPROVAL	ANGLE	±5°
定	Lewis	比例	4:1
TITLE		ROHS COMPLIANT (50Ω)	
DATE		04.27.93	
版次		A-1	
DWG.NO.		23-0041	
佳楠精密電子股份有限公司			
CHIN NAN PRECISION ELECTRONICS CO.,LTD.			