


NO	DESCRIPTION	DATE
△	BACKGROUND FORMAT UPDATED	07.04.02'
△	BACKGROUND FORMAT UPDATED	03.01.10'

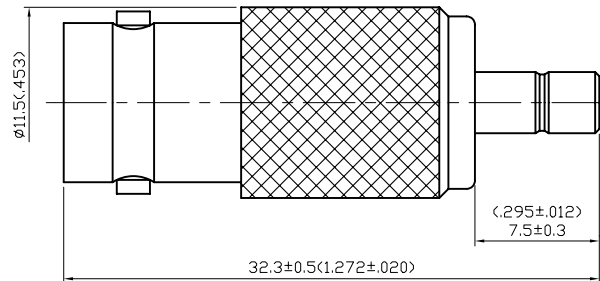

**1.0 ELECTRICAL**

- 1.1 FREQUENCY RANGE: DC-4 GHz
- 1.2 NOMINAL IMPEDANCE: 50 OHM

**2.0 MATERIALS**

- 2.1 BODIES: BRASS PER JIS-C3604
- 2.2 CENTER CONTACT: BRASS PER JIS-C3604
- 2.3 INSULATION: TEFLON PER ASTM D1457 AND ASTM D1710

**3.0 FINISHES AND OTHERS**

- 3.1 SEE BELOW TABLE FOR DETAILS.

**4.0 MECHANICAL**

- 4.1 INTERFACE IN ACCORDANCE WITH: MIL-STD-348A

**5.0 ENVIRONMENTAL**

- 5.1 OPERATING TEMPERATURE RANGE: -65° C TO +165° C

5	CHASSIS	BRASS	1	GOLD 3 μ" MIN.
4	INSULATION	TEFLON	1	NONE
3	CENTER CONTACT	BRASS	1	GOLD 30 μ" MIN.
2	INSULATION	TEFLON	1	NONE
1	BODY	BRASS	1	GOLD 3 μ" MIN.
NO	DESCRIPTION	MATERIAL	Q'TY	FINISH

APPROVED by \_\_\_\_\_ DATE: \_\_\_\_\_

DESCRIPTION		SMB JACK-BNC JACK	
製圖	DRAWN <i>Yoko</i>	TOLERANCE	品名 24-26 T.G.G
檢圖	CHECK <i>Jacky</i>	.X ±0.2 .XX ±0.1	ROHS COMPLIANT (50Ω) 日期 11.21.98' 版次 A-2
認定	APPROVAL <i>Lewis</i>	.XXX ±0.05 ANGLE ±5°	UNIT mm(in) DWG.NO. 24-0042
		SCALE 4:1	佳楠精密電子股份有限公司 CHIN NAN PRECISION ELECTRONICS CO.,LTD.