


|     |      |                              |
|-----|------|------------------------------|
| ISS | ZONE | DESCRIPTION\PER REQUEST\DATE |
|     |      |                              |

REVISIONS

1 2 3 4 5 6 7 8

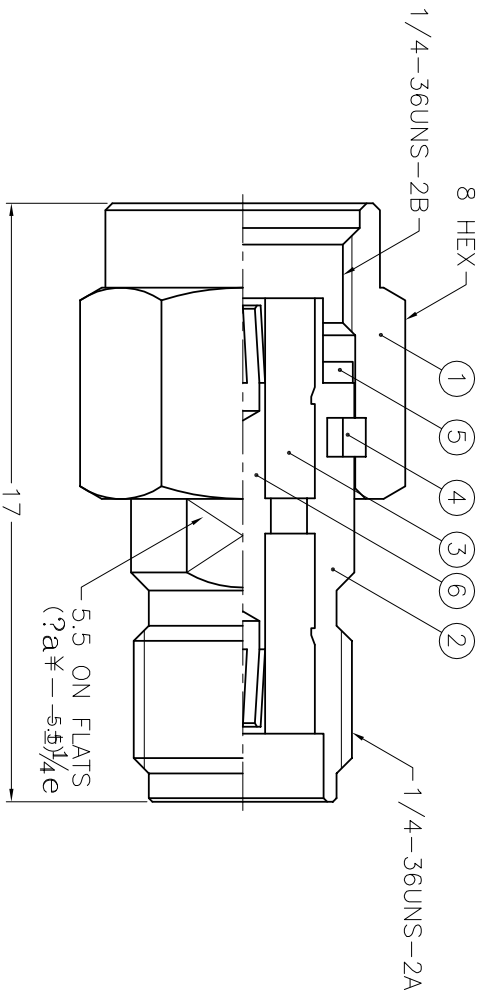

NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)

1. BRASS PER QQ-B-626
2. GOLD PL. 3 MIN. THICK OVER NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
3. BERYLLIUM COPPER PER QQ-C-530
4. GOLD PL. 50 MIN. THICK OVER NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
5. TEFLON MIL-P-19468

DIMENSIONS ARE IN MILLIMETERS

UNLESS OTHERWISE SPECIFIED TOLERANCES

- 0.5-6 = ±0.2
- 6-30 = ±0.4
- 30-120 = ±0.6
- 120-315 = ±1
- 315-1000 = ±1.6
- 1000-2000 = ±2.4

PART NO.

|          |      |
|----------|------|
| APPROVED | DATE |
| CHECKED  | DATE |
| DRAWN    | DATE |

**Amphenol - Kai Jack**

TAINAN TAIWAN

TITLE  
SMA FEMALE TO SMA REVERSE POLARITY FEMALE ADAPTOR

DRAWING NO. KJ-SMAF-RSMAF-3GT50G-50

FILE NO. F:\DWG\SMAT\RSMAF\50\3GT50G

| NO. | DESCRIPTION   | MATERIAL | FINISH  | Q'TY | DRAWING NO.     |
|-----|---------------|----------|---------|------|-----------------|
| 1   | SHELL         | NOTE 1   | NOTE 2  | 1    | SMA5000-1-C     |
| 2   | BODY          | NOTE 1   | NOTE 2  | 1    | SMA5071A1-2-B   |
| 3   | INSULATOR     | NOTE 5   | NATURAL | 2    | SMA5071A1-3T-50 |
| 4   | RETAINER RING | NOTE 3   | NATURAL | 1    | SMA5000-4-B     |
| 5   | GASKET        | SILICONE | RED     | 1    | GS-6/43X06      |
| 6   | CONTACT PIN   | NOTE 3   | NOTE 4  | 1    | SMAF-RSMAF-6    |

1 2 3 4 5 6 7 8

A

B

C

D

E

F