


Fuse holder terminal blocks for 6,35 x 25,4 mm 1/4 x 1 in. and 6,35 x 32 mm 1/4 x 1 1/4 in. fuses

Compression clamp
DIN 1 - DIN 3

MU 10/13.SF2


Spacing 13 mm (.512")



13 mm block for blown fuse indicator (to be ordered separately).

MU 10/14,5.SF2

Spacing 14,5 mm (.571")




14,5 mm block for blown fuse indicator (to be ordered separately).

- End stop th. 9,1 mm **BADL** V0 **0199 408.02**
- End stop th. 9,1 mm **BAM** **0103 002.26**
- Other end stops : See Accessories section
- Rail 35 x 7,5 x 1 **PR30** prepunched **0173 220.05**
- Rail 35 x 15 x 2,3 **PR4** **0168 500.12**
- Rail 35 x 15 x 1,5 **PR5** prepunched **0101 598.26**
- Rail 32 x 15 **PR1Z2** **0163 050.04**
- Other rails : See Accessories section

Notes

The use of some accessories may decrease the block's voltage rating. For more information, consult us.

Accessories

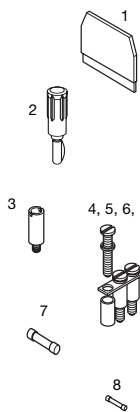

- 1 End section black
- 2 Test plug
- 3 Test socket
- 4 Standard jumper bar
- 5 Screw for BJ
- 6 Washer for BJ
- 7 Fuse 6,35 x 32 mm Quick blow fuse cartridge as per UTE 93435
- 8 Blown fuse indicator

R

See section on markers marking method

| Color | Type | Part numbers |
|----------|---------------------|--------------------|
| Black V0 | MU 10/13.SF2 | 0199 014.11 |

Characteristics

| Wire size | Wire size | | | |
|------------------------|------------------------|-----------|------------|-----|
| | NFC | DIN | UL | CSA |
| Compression Solid wire | 0,5-16 mm ² | 22-10 AWG | 6 AWG max. | |
| Stranded wire | 0,5-10 mm ² | 22-10 AWG | 6 AWG max. | |

| Voltage | | | |
|------------------|----------------|-----------|-----------|
| Rated | 750 V Gr.C (1) | 600 V (1) | 600 V (1) |
| Pulse | | | |
| Pollution degree | | | |

| Current | | | |
|---------|------|------|------|
| Rated | 16 A | 16 A | 16 A |

| Wire size | | | |
|---------------|--------------------|--------|-------|
| Rated / Gauge | 10 mm ² | 10 AWG | 6 AWG |

| Wire stripping length | Recomm. screwdriver | Recomm. torque | Protection |
|-----------------------|---------------------|----------------------------|--------------|
| 12 mm .47" | 5,5 mm | 1,2-1,4 Nm 10.6-12.3 lb.in | IP 20 NEMA 1 |

| Color | Type | Part numbers |
|----------|-----------------------|--------------------|
| Black V0 | MU 10/14,5.SF2 | 0199 013.10 |

Characteristics

| Wire size | Wire size | | | |
|------------------------|------------------------|-----------|------------|-----|
| | NFC | DIN | UL | CSA |
| Compression Solid wire | 0,5-16 mm ² | 22-10 AWG | 6 AWG max. | |
| Stranded wire | 0,5-10 mm ² | 22-10 AWG | 6 AWG max. | |

| Voltage | | | |
|------------------|----------------|-----------|-----------|
| Rated | 750 V Gr.C (1) | 600 V (1) | 600 V (1) |
| Pulse | | | |
| Pollution degree | | | |

| Current | | | |
|---------|------|------|------|
| Rated | 16 A | 16 A | 16 A |

| Wire size | | | |
|---------------|--------------------|--------|-------|
| Rated / Gauge | 10 mm ² | 10 AWG | 6 AWG |

| Wire stripping length | Recomm. screwdriver | Recomm. torque | Protection |
|-----------------------|---------------------|----------------------------|--------------|
| 12 mm .47" | 5,5 mm | 1,2-1,4 Nm 10.6-12.3 lb.in | IP 20 NEMA 1 |

| Type | Part numbers | | |
|-----------------------------|--------------------|--|--|
| FEM13U V0 th. 1,5 mm | 0199 635.24 | | |
| FC2 DIA. 2 mm | 0007 865.26 | | |
| FC4 DIA. 4 mm | 0167 860.01 | | |
| AL2 DIA. 2 mm | 0163 043.21 | | |
| AL3 DIA. 3 mm | 0163 261.00 | | |
| AL4 DIA. 4 mm | 0163 262.01 | | |
| BJS131 10 poles | 0175 991.11 | | |
| VJS11 | 0163 394.26 | | |
| RDJ11 | 0168 783.01 | | |

| Type | Part numbers | |
|--------------------------|--------------------|--|
| delivered with the block | | |
| FC2 DIA. 2 mm | 0007 865.26 | |
| FC4 DIA. 4 mm | 0167 860.01 | |
| AL2 DIA. 2 mm | 0163 043.21 | |
| AL3 DIA. 3 mm | 0163 261.00 | |
| AL4 DIA. 4 mm | 0163 262.01 | |

| Type | Part numbers | | |
|-------------------------------|--------------------|--|--|
| FU633 6,35 x 32 | | | |
| 0,25 A | 0168 554.03 | | |
| 0,63 A | 0168 555.04 | | |
| 1 A | 0168 556.05 | | |
| 1,6 A | 0168 557.06 | | |
| 2,5 A | 0168 558.17 | | |
| 4 A | 0168 559.10 | | |
| 6,3 A | 0168 560.15 | | |
| 10 A | 0168 561.02 | | |
| 16 A | 0168 562.03 | | |
| LEN Neon 110 - 230 VAC | 0167 075.25 | | |
| Neon 480 VAC | 0103 909.00 | | |

| Type | Part numbers | | |
|-------------------------------|--------------------|--|--|
| FU633 6,35 x 32 | | | |
| 0,25 A | 0168 554.03 | | |
| 0,63 A | 0168 555.04 | | |
| 1 A | 0168 556.05 | | |
| 1,6 A | 0168 557.06 | | |
| 2,5 A | 0168 558.17 | | |
| 4 A | 0168 559.10 | | |
| 6,3 A | 0168 560.15 | | |
| 10 A | 0168 561.02 | | |
| 16 A | 0168 562.03 | | |
| LEN Neon 110 - 230 VAC | 0167 075.25 | | |
| Neon 480 VAC | 0103 909.00 | | |

Leakage current with neon indicator < 0,5 mA (110 & 480 VAC) < 0,7 mA (230 VAC)

Leakage current with neon indicator < 0,5 mA (110 & 480 VAC) < 0,7 mA (230 VAC)

(1) (17) Sides of block (26) Note : (1) Insulation voltage of terminal block - operating voltage : In accordance with fuse rating.