


343-1927

Interface Module

1/1

Interface module for ribbon cable acc. to IEC 603-1 / DIN 41651

Data sheet

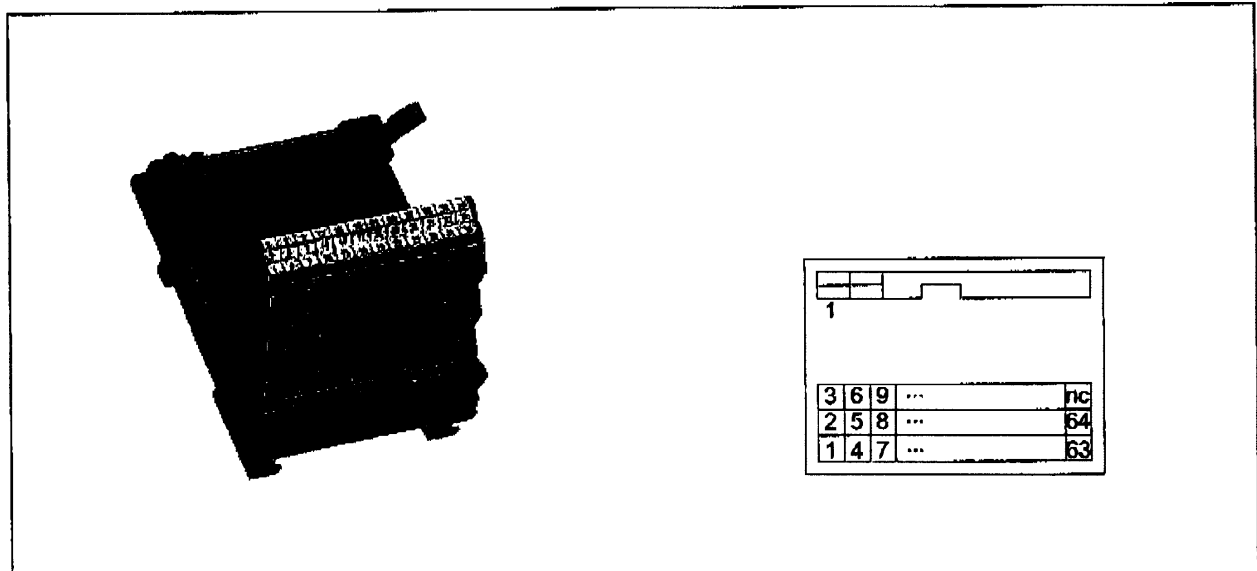

Description	Item-No.	Pack.-unit pcs
Interface module	289-614	1
With male connector	289-615	1
20	289-616	1
26	289-617	1
34	289-618	1
40	289-619	1
50		
64		

<p>Interface module with male connector for female connector with IDC acc. to DIN 41651 part 1 and 2. Short and long latches for the female connector with and without strain relief, are shipped loose.</p> <ul style="list-style-type: none"> • Mounting carrier for DIN 35 rail with lateral marking system. • Marking with the WMB multi marking system or with marking strips with cover. 	<p>Technical Data</p> <p>Operating voltage AC/DC 125V</p> <p>Nominal current 1 A</p> <p>Connector contact Phosphor-bronze</p> <p>0.38 µm Au selectively over 1.3 µm Ni</p> <p>Performance level 3</p> <p>Nominal voltage acc. to VDE 0110/1.89 125 V / 1.5 kV / 2</p> <p>Dimensions incl. mounting carrier (LxWxH) (Lx85x62*) mm (Lx3.25x2.44*) in</p> <p>* from upper edge of DIN 35 rail</p> <p>Wire connection CAGE CLAMP® terminal strips (WAGO series 737)</p> <p>0.08-2.5 mm² / AWG 28-12**</p> <p>** AWG12: THHN, THWN</p> <p>Stripped length 5-8 mm / 0.22 in</p> <p>Mating direction vertical</p> <p>Ambient operating temperature -20 °C...+55 °C</p> <p>Storage temperature -40 °C...+70 °C</p> <p>Standards / prescriptions IEC 603-1 / DIN 41651 Part 1 and 2</p>
--	---

WAGO Kontakttechnik GmbH Postfach 2880 • D-32385 Minden Tel.: 05 71 / 8 87-0 E-Mail: info@wago.com
 Hansastr. 27 • D-32423 Minden Fax.: 05 71 / 8 87-169 Web: http://www.wago.com

Subject to design changes
 06.04.2001 / 4761400e.doc