




PM 5.08/90



new

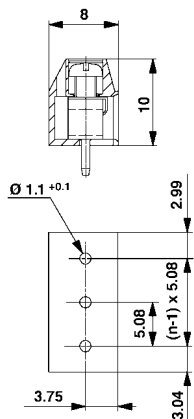

Technical data	VDE	UL	CSA
Rated voltage (V)	250*	300	300
Rated current (A)	17.5	16	10
Wire size (mm ² /AWG)	1.5	24...14	14


*Pollution severity 3 / Overvoltage category III
Additional technical data see page 50

Solder pin length **3.5 mm** **3.5 mm**

Color				
Poles	Type	Part No.	Part No.	Qty.
2	PM 5.08/2/90	1760490000	1760510000	500
3	PM 5.08/3/90	1760500000	1760520000	500
4	PM 5.08/4/90	67600961	67600974	
5	PM 5.08/5/90	67600962	67600975	
6	PM 5.08/6/90	67600963	67600976	
7	PM 5.08/7/90	67600964	67600977	
8	PM 5.08/8/90	67600965	67600978	
9	PM 5.08/9/90	67600966	67600979	
10	PM 5.08/10/90	67600967	67600980	
11	PM 5.08/11/90	67600968	67600981	
12	PM 5.08/12/90	67600969	67600982	
13	PM 5.08/13/90	67600970	67600983	
14	PM 5.08/14/90	67600971	67600984	
15	PM 5.08/15/90	67600972	67600985	
16	PM 5.08/16/90	67600973	67600986	

Accessories	Page
Marking	42
Mounting	-
Miscellaneous	45


MK8 5.08/135

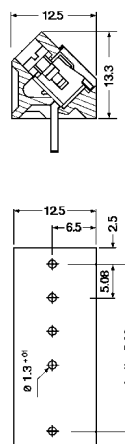

Technical data	VDE	UL	CSA
Rated voltage (V)	60*	150	150
Rated current (A)	16	15	15
Wire size (mm ² /AWG)	1.5	22...12	14

*Pollution severity 3 / Overvoltage category III
Additional technical data see page 51

Solder pin length **5.0 mm**

Color			
Poles	Type	Part No.	Qty.
2	MK8 5.08/2/135	0332060000	200
3	MK8 5.08/3/135	0307860000	100
4	MK8 5.08/4/135	0307760000	100
10	MK8 5.08/10/135	0302660000	50

Accessories	Page
Marking	42
Mounting	-
Miscellaneous	45