



Copyright FCI



FCIconnect.com



1 | 2

3 |

4

PRODUCT NUMBER  
20020327-XXXXXXLF

20020327-□ □ □ □ □ 0 □ L F

PITCH  
C: 3.50 mm  
D: 3.81 mm

POLES  
02: 2 POLES  
03: 3 POLES  
04: 4 POLES  
24: 24 POLES

LF : DENOTED RoHS COMPATIBLE  
1 : STANDARD PRODUCT  
W/ BOX PACKING

SCREW CODE

CODE	SCREW TYPE	AVAILABILITY
A	-/+	ON REQUEST ONLY
B	-	STANDARD

PROPERTY TABLE			
FCI SERIES NAME	26-350	26-381	
PITCH (mm)	3.50	3.81	
VOLTAGE RATING (VAC)	300	300	
CURRENT RATING (A)	10	10	
APPLICABLE WIRE RANGE (AWG)	1-WIRE	16~24	
	2-WIRE	20	
WIRE CROSS SECTION (mm <sup>2</sup> )	SOLID	1-WIRE	1.5
		2-WIRE	0.5
	STRANDED	1-WIRE	1.0
		2-WIRE	0.2
OPENING CONTACT HOUSING(mm <sup>2</sup> )	1.6x1.6	1.6x1.6	
WIRE STRIP LENGTH(mm)	5~6	5~6	
TORQUE +/-10% (N-m/Lb-in)	0.19/1.7	0.19/1.7	
SCREW	M2x0.4	M2x0.4	
WITHSTANDING VOLTAGE (kV)	1.6	1.6	
OPERATING TEMP. (°C)	-40~+115	-40~+115	
SOLDERING TEMP. (°C)	250±10 (5 sec.)	250±10 (5 sec.)	
POLES AVAILABLE	02~24	02~24	
SAFETY CERTIFICATE			

HOUSING CODE

CODE	COLOR	AVAILABILITY
1	GREEN(RAL 6018/T)	STANDARD
2	BLACK	ON REQUEST ONLY
3	GREY(RAL 7004/P)	ON REQUEST ONLY
4	BLUE(RAL 5015/A)	ON REQUEST ONLY

NOTES:

- MATERIALS  
 1-1 HOUSING: THERMALPLASTIC RESIN, UL 94V-0 RATED.  
 1-2 SCREW: STEEL, ZINC PLATED.  
 1-3 CLAMP: COPPER ALLOY, NICKEL PLATED.  
 1-4 TERMINAL: COPPER ALLOY, TIN PLATED.  
 2. PRODUCTION SPECIFICATION REFER TO FCI GS-12-625.  
 3. BOXED PACKAGING.  
 DETAILED PRODUCT PACKING SPECIFICATION REFER TO FCI GS-14-1394.  
 4. FCI, SAFETY CERTIFICATE LOGO AND SERIES NAME TO BE SHOWN ON PRODUCT SURFACE.  
 5. THE PRODUCTS WHERE THE PART NUMBER END IN "LF" MEET THE EUROPEAN UNION DIRECTIVE AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.  
 6. RECOMMENDED SOLDERING PROCESS BY WAVE SOLDER.

mat'l. code	surface ASME Y14.5	tolerance ASME Y14.5	projection	product family
itr	ecn no	dr	date	tolerances unless otherwise specified
A	0609-0203	BF	062509	angles
B	T09-1148	BF	111709	X.±0.5
C	T09-1152	BF	112609	X.X±0.3
D	T10-0042	WL	030310	X.Xx±0.1
E	T10-0109	WL	070710	dr
F	T10-0159	WL	100410	enrg
G	T10-0187	WL	121410	chr
sheet	revision	G	G	G
index	sheet	1	2	3

form: A4mmXLc

1 |

2 |

PDM: Rev:G 3 | STATUS:Released Printed: Dec 22, 2010 4



Copyright FCI



FCIconnect.com





1 | 2



3 |

4

PRODUCT NUMBER	SERIES NAME	PITCH
20020327-CXXXXXLF	26-350	3.50 mm

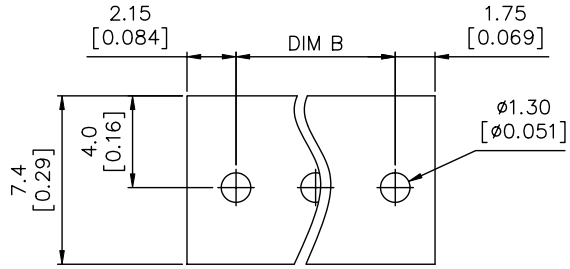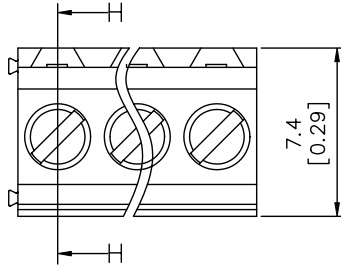

P.C.B. LAYOUT

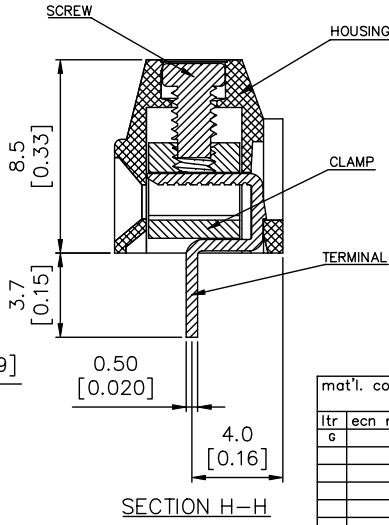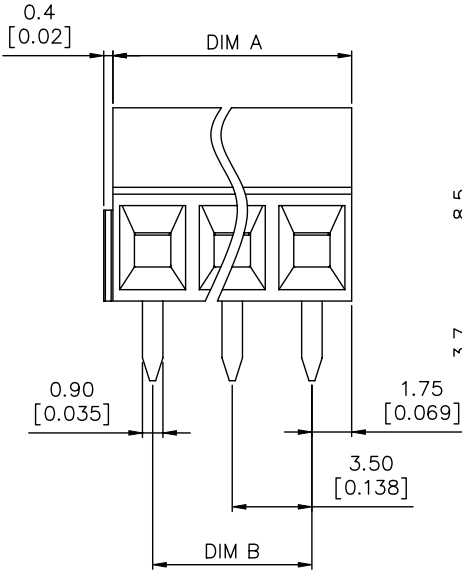

N = Number of poles  
 Dim A =  $N \times 3.5 [0.138]$   
 Dim B =  $(N-1) \times 3.5 [0.138]$

TOL.	Dim A	Dim B
2-6p	$\pm 0.15 [0.006]$	
7-12p	$\pm 0.20 [0.008]$	
13-16p	$\pm 0.25 [0.010]$	
17-24p	$\pm 0.30 [0.012]$	

mat'l. code	surface ASME Y14.5	tolerance ASME Y14.5	projection	product family
ltr	ecn	no	dr	date
tolerances unless otherwise specified				title
g	angles	MM	INCH	TERMINAL BLOCK
	X $\pm 0.5$	X.X $\pm 0.3$	X.XX $\pm 0.1$	FIXED HORIZONTAL WIRE INLET
	X $\pm 1$			dwg no
dr	BEER FU	062509	FCI	20020327
enr	BEER FU	062509		sheet 2 of 3
chr	GARY HSIEH	062509		size
appd	JOSEPH HSIA	062509		A4
sheet index	revision sheet			type
				CUSTOMER Drawing

form: A4mmXLc

1 |

2 |

PDM: Rev:G 3 | STATUS:Released Printed: Dec 22, 2010 4



Copyright FCI



FCIconnect.com





1 | 2



3

4

PRODUCT NUMBER	SERIES NAME	PITCH
20020327-DXXXXXLF	26-381	3.81 mm

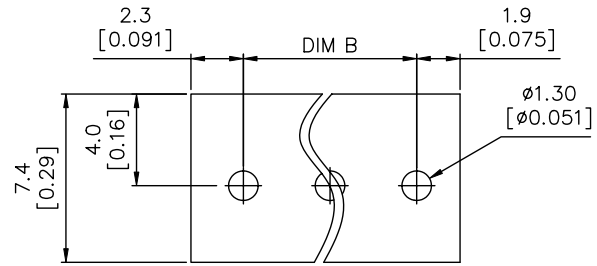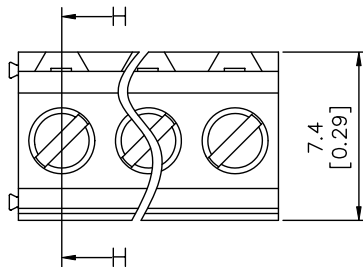

P.C.B. LAYOUT

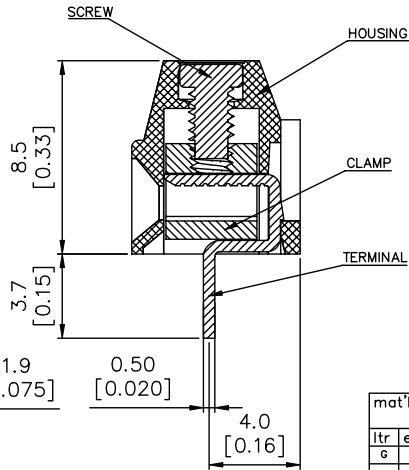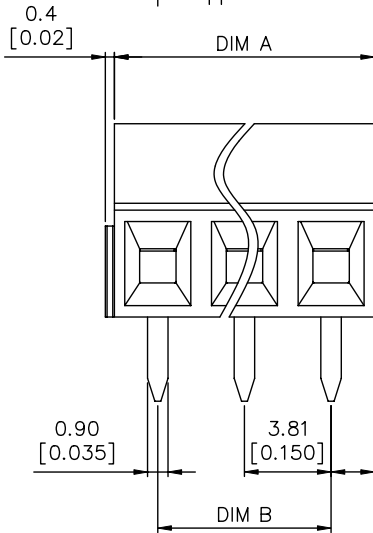

SEC H-H

N = Number of poles  
 Dim A =  $N \times 3.81 [0.150]$   
 Dim B =  $(N-1) \times 3.81 [0.150]$

TOL.	Dim A	Dim B
2-6p	$\pm 0.15 [0.006]$	
7-12p	$\pm 0.20 [0.008]$	
13-16p	$\pm 0.25 [0.010]$	
17-24p	$\pm 0.30 [0.012]$	

mat'l. code	surface ASME Y14.5	tolerance ASME Y14.5	projection	product family
ltr	ecn no	dr	date	TERMINAL BLOCK
g	tolerances unless otherwise specified			title
	angles	X. $\pm$ 0.5	MM	TERMINAL BLOCK
		X.X $\pm$ 0.3	[INCH]	FIXED HORIZONTAL WIRE INLET
		X.XX $\pm$ 0.1	scale	dwg no
	dr	BEER FU	062509	sheet 3 of 3
	enr	BEER FU	062509	size
	chr	GARY HSIEH	062509	20020327
	appd	JOSEPH HSIA	062509	A4
sheet index	revision sheet			type
				CUSTOMER Drawing

form: A4mmXLc

1

2

PDM: Rev:G 3 | STATUS:Released | Printed: Dec 22, 2010 4