



FEATURES AND SPECIFICATIONS

Features and Benefits

- 2 to 20 circuits
- Holds wires for secure, reliable contact
- Industry-standard interface
- End-to-end stackable
- High flammability rating

Reference Information

UL : File No. E48521
 Guide No. XCFR2
 UL Recognized Component to US and
 Canadian safety requirements

Electrical

Voltage: 300V
 Maximum Current: 10 Amp
 Insulation Resistance: >5,000 Megaohms

Mechanical


Rec. Tightening Torque: 2.5 in. lbs, .31 Nm
 Operating Temperature: 140°C
 Wire Strip Length: 1/4" or 6mm

Physical

Housing: Polyamide 4/6, black
 Screws: M2 Cheesehead, Silicon Bronze
 Screw Plating: Nickel
 Contacts: Beryllium Copper
 Contact Plating: Hot Tin Dip
 Pressure Clamp: Yellow Brass
 Pressure clamp plating: Nickel
 Wire Range: 16 to 24 AWG, 1.0 to 0.2mm²


3.5mm (.138") Pitch Beau Eurostyle® Pluggable PCB Terminal Block

39351
180° Wire Entry



35 Series

CATALOG DRAWING (FOR REFERENCE ONLY)

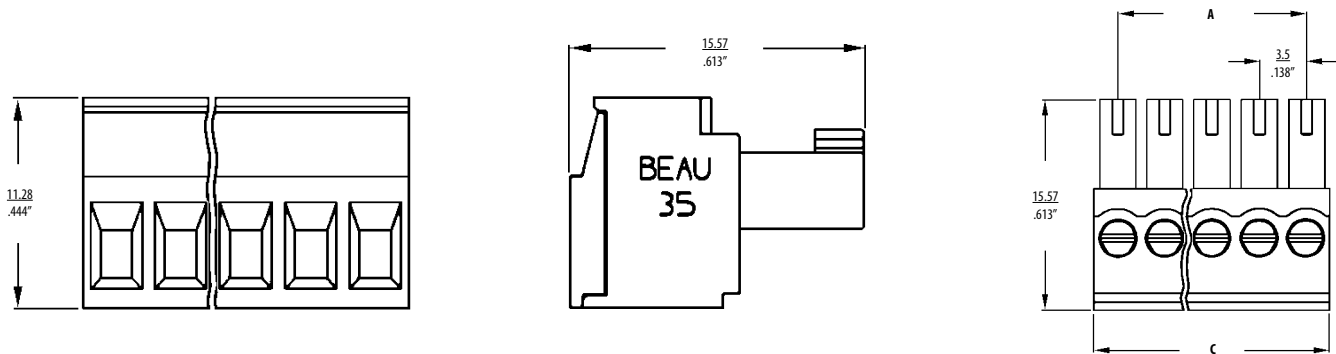

ORDERING INFORMATION AND DIMENSIONS

Order# Replace XX with # of circuits, 02-20

Right Angle

Tin Plated
 39351-00XX

Gold Plated
 39351-01XX

# of Circuits	A		C	
	in	mm	in	mm
2	.14	3.50	.28	7.11
3	.28	7.00	.41	10.41
4	.41	10.50	.55	13.97
5	.55	14.00	.69	17.53
6	.69	17.50	.83	21.08
7	.83	21.00	.97	24.64
8	.96	24.50	1.10	27.94
9	1.10	28.00	1.24	31.50
10	1.24	31.50	1.38	35.05
11	1.38	35.00	1.52	38.61

# of Circuits	A		C	
	in	mm	in	mm
12	1.52	38.50	1.65	41.91
13	1.65	42.00	1.79	45.47
14	1.79	45.50	1.93	49.02
15	1.93	50.00	2.07	52.58
16	2.07	52.50	2.21	56.13
17	2.20	56.00	2.34	59.44
18	2.34	59.50	2.48	62.99
19	2.48	63.00	2.62	66.55
20	2.62	66.50	2.76	70.10

*Consult factory for imprinting and other options

Molex Industrial Division
 New England Operations
 Gilford, NH 03249-6600
 Phone (603) 524-5101
 Fax (603) 524-1627