



# 3.5mm (.138") Pitch Beau Eurostyle® PCB Header

**39353, 39355**  
**Closed End**

## FEATURES AND SPECIFICATIONS

### Features and Benefits

- 2 to 20 circuits
- Industry-standard interface
- High flammability rating

### Electrical

Voltage: 300 V  
Maximum Current: 10 Amp  
Insulation Resistance: >5,000 Megaohms

### Mechanical

Operating Temperature: 140°C


### Reference Information

UL : File No. E48521  
Guide No. XCFR2  
CSA: File No. 025562

### Physical

Housing: Nylon 4.6, UL94 V-0, black  
Header Pins: Brass, 3/4 Hard  
Header Pin Plating: Tin

## CATALOG DRAWING (FOR REFERENCE ONLY)

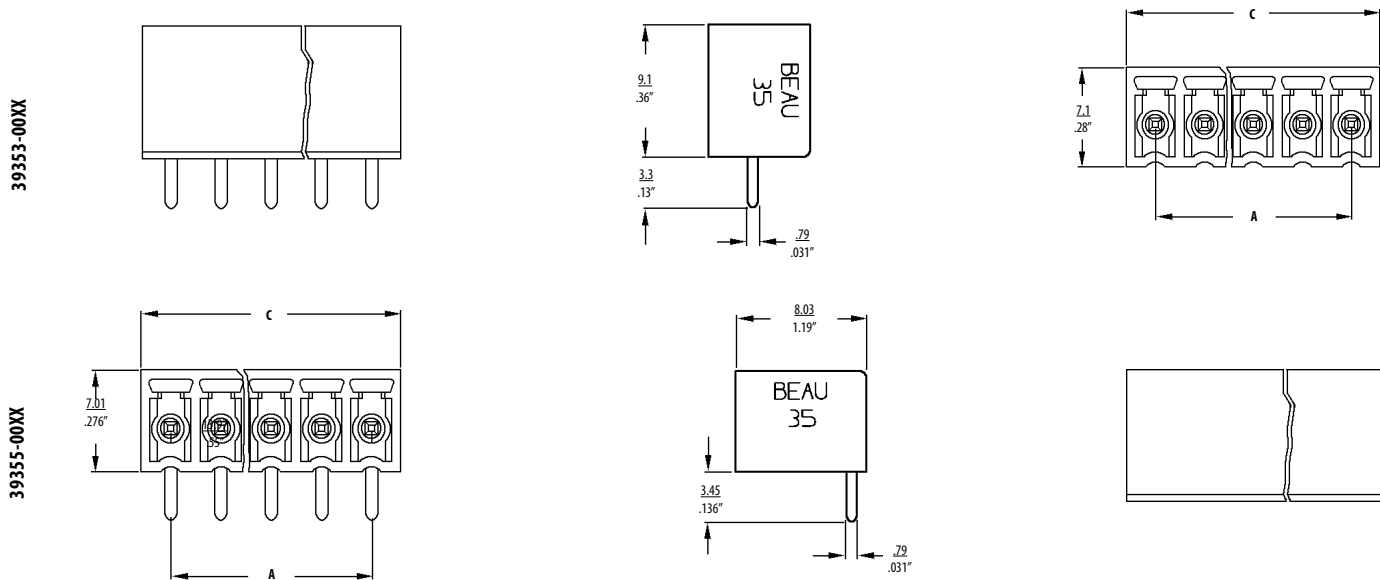

## ORDERING INFORMATION AND DIMENSIONS

Order # Replace XX with # of circuits, 02-20

Vertical		Right Angle	
Tin Plated	Gold Plated	Tin Plated	Gold Plated
39353-00XX	39353-01XX	39355-00XX	39355-01XX

# of Circuits	A		C	
	in	mm	in	mm
2	.14	3.50	.30	7.62
3	.28	7.01	.43	10.92
4	.41	10.49	.57	14.48
5	.55	13.99	.71	18.03
6	.69	17.50	.85	21.59
7	.83	21.00	.99	25.15
8	.96	24.51	1.12	28.45
9	1.10	27.99	1.26	32.00
10	1.24	31.49	1.40	35.56
11	1.38	35.00	1.54	39.12

# of Circuits	A		C	
	in	mm	in	mm
12	1.52	38.51	1.67	42.42
13	1.65	42.01	1.81	45.97
14	1.79	45.49	1.95	49.53
15	1.93	50.00	2.09	53.09
16	2.07	52.50	2.23	56.64
17	2.20	56.01	2.36	59.94
18	2.34	59.51	2.50	63.50
19	2.48	62.99	2.64	67.06
20	2.62	66.50	2.78	70.61

\*Consult factory for sequential numbering option