
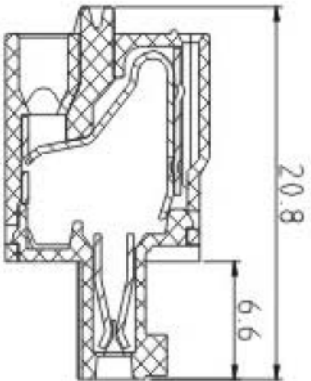
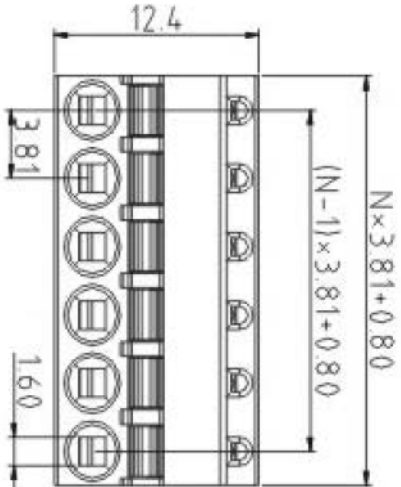


Rev	AWO #	Description	Date	Appr
-	9427	RELEASED	3/20/09	

APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

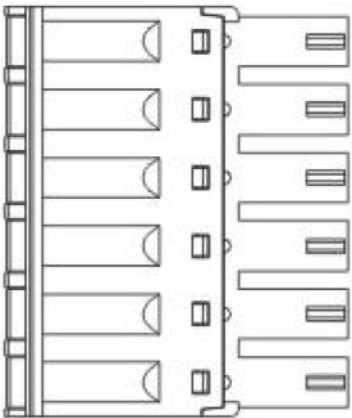

**SPECIFICATIONS:**

**Material:**  
 Insulator: PA66, rated UL 94V-0  
 Insulator color: Green  
 Contact: Phosphor Bronze, Tin plated

**Electrical:**  
 Operation voltage: 125 VAC max  
 Current rating: 4 Amps max per Pole  
 Contact resistance: 20 mohms max  
 Insulation resistance: 500 Mohms min @ DC500V  
 Dielectric withstanding voltage: 1250 VAC for 1 minute

**Mechanical:**  
 Wire Range: 20 to 28 Awg

**Environmental:**  
 Operating temperature: -30°C to +105°C  
 Lead free, RoHS compliant.  
 Recommended soldering temp: 235°C for 5 sec.



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE MM	
TOLERANCES: EXCEPT AS NOTED	
INCHES	HOLES
.X ± .10	ØXX ± .10
.XX ± .020	ØXXX ± .015
.XXX ± .015	ØXXXX ± .010
APPROVALS	DATE
DRAWN	DY
CHECKED	3/20/09
APPROVED	

**ADAM TECH**  
 909 Railway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: **TERMINAL BLOCK, SPRING FOR PLUGGABLE,  
 3.81MM PITCH**

SIZE: X PART NO.: EB2-XX-M-B  
 REF: S00007T SCALE: NTS SHEET 1 OF 1