
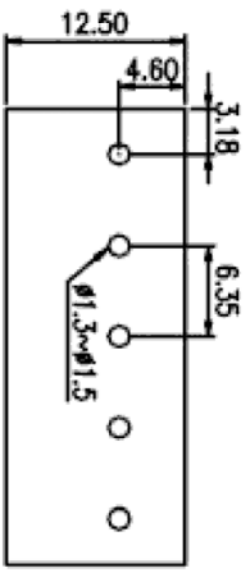


Rev	AWO #	Description	Date	Appr
-	9427	RELEASED	3/06/09	

APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

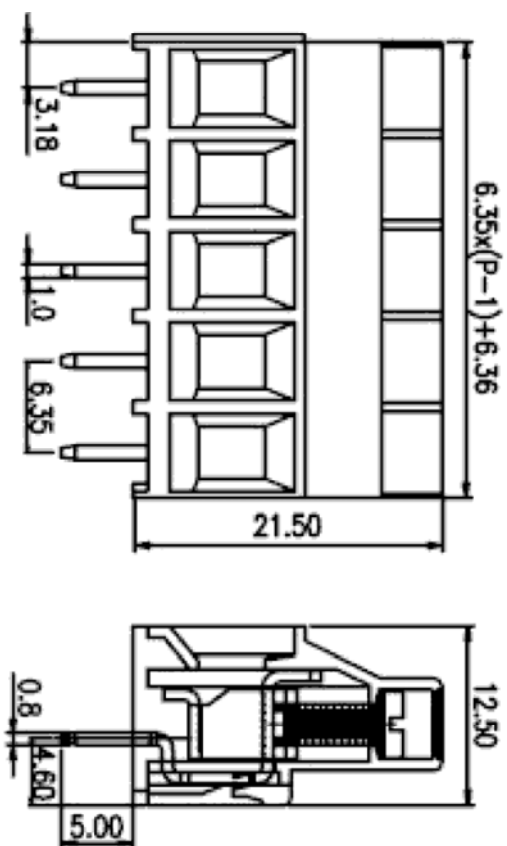

**SPECIFICATIONS:**

Material: Insulator: PA66, rated UL 94V-0  
 Insulator color: Green  
 Contact: Bronze, Tin plated  
 Screw: Steel, M3/Zn plated

Electrical:  
 Operation voltage: 300 VAC max  
 Current rating: 30 Amps max per Pole  
 Rated surge voltage: 1.6/2.5/4 KV

Mechanical:  
 Torque (Lb-in): 7  
 Solid wire: 26-10 AWG

Environmental:  
 Operating temperature: -40°C to +105°C  
 Lead free, RoHS compliant.  
 Recommended soldering temp: 235°C for 5 sec.



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE MM	
TOLERANCES: EXCEPT AS NOTED	
INCHES	HOLDS
.X ± .10	ØX ± .10
.XX ± .020	ØXX ± .015
.XXX ± .015	ØXXX ± .010
APPROVALS	DATE
DRAWN DY	3/06/09
CHECKED	
APPROVED	

**ADAM TECH**  
 909 Railway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE		PART NO.		REV.
TERMINAL BLOCK, PCB, VERTICAL, 6.35MM PITCH		EB4-XX-P		-
SIZE	REF:	SCALE:	SHEET	1 OF 1
X	S0002AT	NTS	1	

6 5 4 3 2 1