

ALL RIGHTS RESERVED. NO PORTION OF THIS PUBLICATION, WHETHER IN WHOLE OR IN PART CAN BE REPRODUCED WITHOUT THE EXPRESS WRITTEN CONSENT OF SPC TECHNOLOGY.




SPC-F005.DWG

REVISIONS

DCP #	REV	DESCRIPTION	DRAWN	DATE	CHECKD	DATE	APPRVD	DATE
			MRD	01-08-10	JAG	14-08-10	XXX	16-08-10

DOC. NO. SPC-F005 * Effective: 7/8/02 * DCP No: 1398


PCB Layout

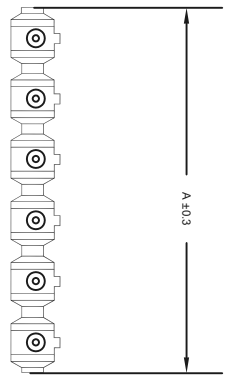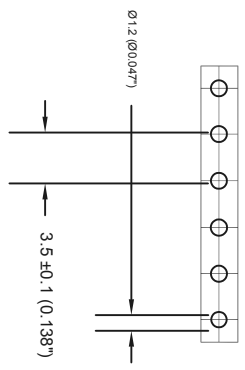

Specifications

Current rating : 15Amp AC300V
 Operation temperature : -40°C to +105°C

Material	Plating/Finish	Remarks
1 Housing 2 Solder pin	Polyamide 66(UL94V-0) Brass	Tin plated Black

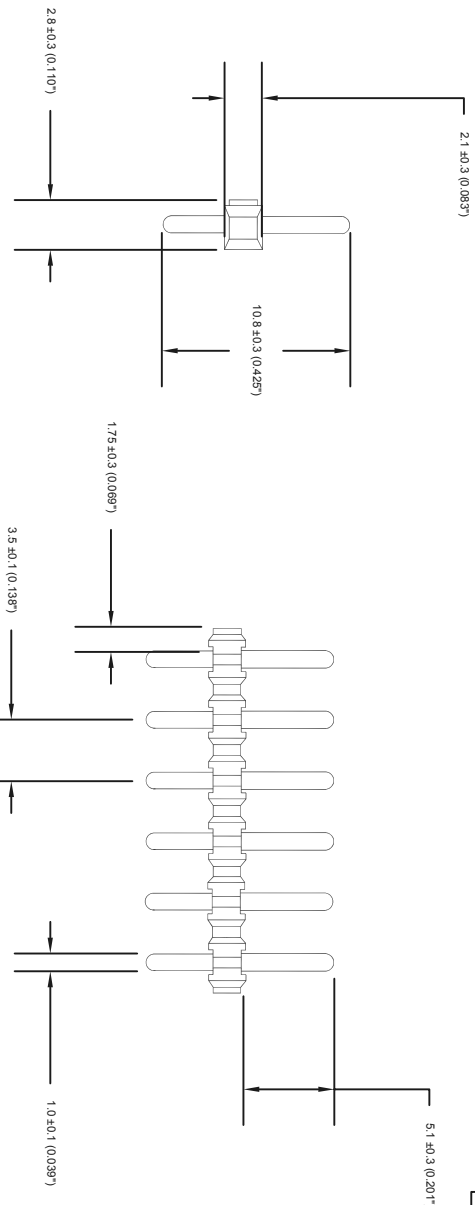

Pitch : 2.50mm (0.098inch)

Poles	A(mm)	A(in)	Poles	A(mm)	A(in)
2	7.0	0.276	15	52.5	2.067
3	10.5	0.413	16	56.0	2.205
4	14.0	0.551	17	59.5	2.343
5	17.5	0.689	18	63.0	2.480
6	21.0	0.827	19	66.5	2.618
7	24.5	0.965	20	70.0	2.756
8	28.0	1.102	21	73.5	2.894
9	31.5	1.240	22	77.0	3.031
10	35.0	1.378	23	80.5	3.169
11	38.5	1.516	24	84.0	3.307
12	42.0	1.654			
13	45.5	1.791			
14	49.0	1.929			

All materials are RoHS according EU Standard

Part Number Table	
Description	Part Number
Plugable Header	MD023-35002

Dimensions : Inches (mm)

Plugable Header

DRAWING TITLE:		DRAWING TITLE:	
DRAWN BY:	DATE:	SIZE	DWG. NO.
MRD	01-08-10	A	XXX
CHECKED BY:	DATE:	SCALE:	U.O.M.: Millimeters
JAG	03-08-10	NTS	
APPROVED BY:	DATE:	SHEET:	1 OF 1
XXX	16-08-10		

DISCLAIMER: ALL STATEMENTS AND TECHNICAL INFORMATION CONTAINED HEREIN ARE BASED UPON INFORMATION AND/OR TESTS WE BELIEVE TO BE ACCURATE AND RELIABLE. SINCE CONDITIONS OF USE ARE BEYOND OUR CONTROL, THE USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT FOR THE INTENDED USE AND ASSUME ALL RISK AND LIABILITY WHATSOEVER IN CONNECTION THEREWITH.