


ALL RIGHTS RESERVED. NO PORTION OF THIS PUBLICATION, WHETHER IN WHOLE OR IN PART CAN BE REPRODUCED WITHOUT THE EXPRESS WRITTEN CONSENT OF SPC TECHNOLOGY.

SPC-F005.DWG

REVISIONS

DCP #	REV	DESCRIPTION	DRAWN	DATE	CHECKD	DATE	APPRVD	DATE
			M/RD	10-08-10	JAG	20-08-10	XXX	30-08-10

DOC. NO. SPC-F005 * Effective: 7/8/02 * DCP No: 1398



Specifications

Current Rating : 16AMP AC 300V
 Insulation Withstands Volt : AC2000V min
 Insulation resistance : >2000M Ω DC 500 V
 Operation Temperature : -40°c to +105°c




CONFIRMED & ACCEPTED BY:

Material	Plating/Finish	Remarks
1 Insulating body	Polyamide 66 (UL 94V-0)	Tin plated
2 Solder pin	Brass	Green

Poles	A(mm)	A(in)	Poles	A(mm)	A(in)
1	11.60	0.457	15	76.60	3.016
2	16.60	0.654	16	81.60	3.213
3	21.60	0.850	17	86.60	3.409
4	26.60	1.047	18	91.60	3.606
5	31.60	1.244	19	96.60	3.803
6	36.60	1.441	20	101.60	4.000
7	41.60	1.638	21	106.60	4.197
8	46.60	1.835	22	111.60	4.394
9	51.60	2.031	23	116.60	4.591
10	56.60	2.228	24	121.60	4.787
11	61.60	2.425			
12	66.60	2.622			
13	71.60	2.819			
14					

Part Number Table

Description	Part Number
Pluggable Header	ME040-50002

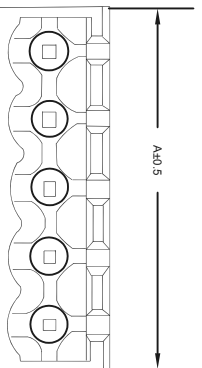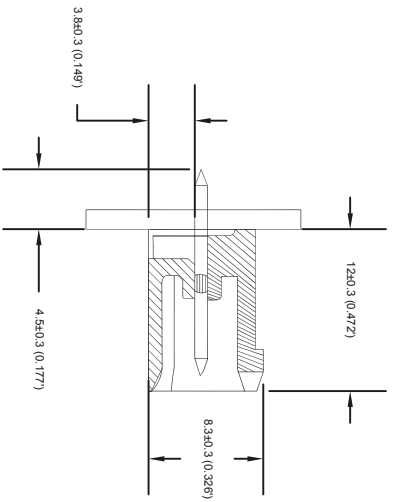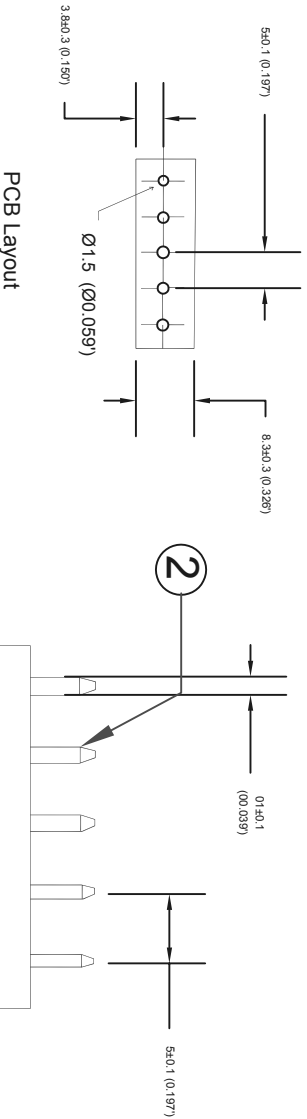

Dimensions : Inches (mm)

TOLERANCES:

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE FOR REFERENCE PURPOSES ONLY.

DRAWN BY:

DATE:

MRD

10-08-10

CHECKED BY:

DATE:

JAG

20-08-10

APPROVED BY:

DATE:

XXX

30-08-10

DRAWING TITLE:

Pluggable Header

SIZE DWG. NO.

A

XXX

ELECTRONIC FILE

04R7072 ME040-5000X

REV

SCALE: NTS

U.O.M.: Millimeters

SHEET: 1

OF 1

DISCLAIMER:
 ALL STATEMENTS AND TECHNICAL INFORMATION CONTAINED HEREIN ARE BASED UPON INFORMATION AND/OR TESTS WE BELIEVE TO BE ACCURATE AND RELIABLE. SINCE CONDITIONS OF USE ARE BEYOND OUR CONTROL, THE USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT FOR THE INTENDED USE AND ASSUME ALL RISK AND LIABILITY WHATSOEVER IN CONNECTION THEREWITH.