




This document is the property of Amphenol Corporation and is delivered on the express condition that it is not to be disclosed, reproduced or used, in whole or in part, for the manufacture or sale by anyone other than Amphenol Corporation without its prior consent, and that no right is granted to disclose or to use any information in this document.


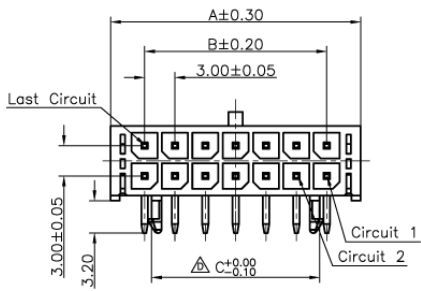


Circuits	Dimension			Circuits	Dimension		
	A	B	C		A	B	C
2	6.7	—	2.9	14	24.7	18.0	16.6
4	9.7	3.0	2.9	16	27.7	21.0	19.6
6	12.7	6.0	2.9	18	30.7	24.0	22.6
8	15.7	9.0	7.6	20	33.7	27.0	25.6
10	18.7	12.0	10.6	22	36.7	30.0	28.6
12	21.7	15.0	13.6	24	39.7	33.0	31.6

Specifications:

Current rating:5.0A AC,DC  
 Voltage rating:250V AC, DC  
 Contact resistance:10m ohm Max  
 Insulation resistance:1000M ohm Min  
 Withstanding voltage:AC 1500V AC/minute  
 Operating Temperature:-25°C ~ +105°C

Materials:  
 Insulator:High Temp Plastic (Nylon 46 UL94V-0)  
 Insulator Color:Black  
 Contact :Copper Alloy  
 Finish:Tin Plated

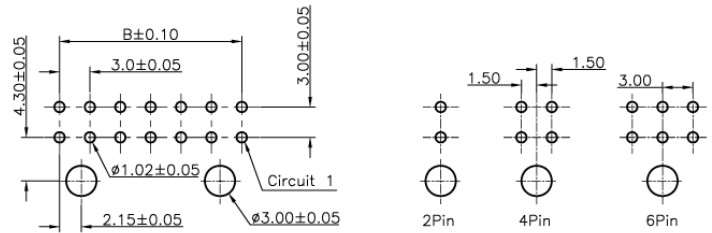

PCB Layout

TOLERANCE (mm)	APPROVALS	DATE	TITLE	AMPHENOL	
X. ±0.3	DRAWN Stephane	20/Jan/2005	3.0 Power Wafer Dip R/A w/Post	Amphenol European Design Center	
XX ±0.2	CHECKED Rob	20/Jan/2005		Scale N.A.	Sheet 1 of 1
XXX ±0.15	APPROVED Rob	20/Jan/2005			
UNLESS OTHERWISE SPECIFIED			UNIT: mm	SIZE: A4	DRAWING N° MF30-DHP1-XX
				REV. A	