

4

3

2

1




THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION. ALL RIGHTS RESERVED.

MATERIAL: HOUSING: THERMOPLASTIC, UL94V-0 BLACK. TERMINALS: BRIGHT TIN PLATED, COPPER ALLOY. SCREWS: 6-32, STEEL, ZINC PLATED WITH CLEAR CHROMATE. UNLESS OTHERWISE NOTED.





ELECTRICAL: RATED CURRENT UL/CSA: CLASS C: 25A, 300V. CLASS D: 5A, 600V. WIRE RANGE: 12-22 AWG

MECHANICAL: RECOMMENDED TIGHTENING TORQUE: 7 IN.-LBS. OPERATING TEMP.: 105°C MAX

- MARK WITH WHITE PERMANENT INK. ALL SCREWS TO BE DRIVEN DOWN TO TERMINAL SURFACE. STAINLESS STEEL SCREWS. NICKEL PLATED BRASS SCREWS. PRELIMINARY PART NUMBER.



SEE TABLE FOR P/N'S

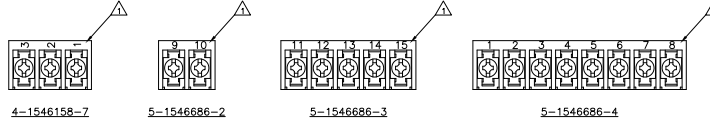

RECOMMENDED PCB LAYOUT

Table with columns: REVISIONS, DIM A, NO OF POS, CATALOG NUMBER, PART NO. Includes revision history and a list of part numbers.

Controlled document header with fields for DIMENSIONS, MATERIAL, FINISH, DATE, and DRAWING NO. Includes TE Connectivity logo.