


© COPYRIGHT 1997 BY SPC TECHNOLOGY.
 ALL RIGHTS RESERVED. NO PORTION OF
 THIS PUBLICATION, WHETHER IN WHOLE
 OR IN PART CAN BE REPRODUCED
 WITHOUT THE EXPRESS WRITTEN CONSENT
 OF SPC TECHNOLOGY.

REVISIONS			DOC. NO. SPC-F004, Total Pages: 2 Effective: 7/15/97. DCP No: 229 Supersedes DCP No: 103					
DCP #	REV	DESCRIPTION	DRAWN	DATE	CHECKD	DATE	APPRVD	DATE
136	A	Released	J.W.M.	8/26/98	J.C.	11/19/98	D.J.C.	11/23/98

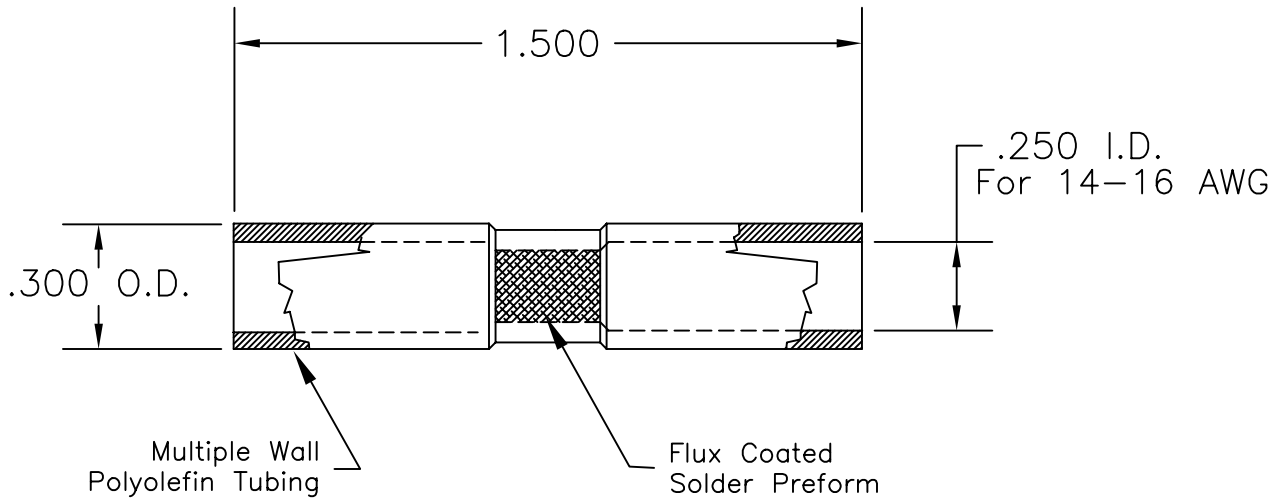

NOTES:

Solder:

1. 50SN/32PB/18CD
2. 2.5% ~ 3.0% RMA Flux Coating
3. 295°F (145°C) Melting Temp.

Tubing:

1. Multiple wall Polyolefin
2. Meltable, integral inner wall
3. 275°F [135°C] shrink temp.
4. -67°F [-55°C] to 230°F [110°C] continuous operating temp.
5. Tensile Strength: 2200 PSI
6. Ultimate Elongation: 500%
7. Secant Modulus, 2%: 27000 PSI
8. Specific Gravity: 1.00 Max.
9. Longitudinal Change: 5%
10. Dielectric strength: 1000V/Mil
11. Volume Resistivity: $10^{15} \Omega/cm$
12. Non-corrosive
13. Water Absorption: <0.1%
14. Tubing Color: Blue

SPC-F004.DWG

DISCLAIMER:
 ALL STATEMENTS AND TECHNICAL INFORMATION CONTAINED HEREIN ARE BASED UPON INFORMATION AND/OR TESTS WE BELIEVE TO BE ACCURATE AND RELIABLE. SINCE CONDITIONS OF USE ARE BEYOND OUR CONTROL, THE USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT FOR THE INTENDED USE AND ASSUME ALL RISK AND LIABILITY WHATSOEVER IN CONNECTION THEREWITH.



SPC TECHNOLOGY

*Unless Otherwise Specified:
 Dimensions are shown for
 reference only!*

DRAWN BY:	DATE:
Jeff McVicker	8/26/98
CHECKED BY:	DATE:
John Cole	11/19/98
APPROVED BY:	DATE:
Daniel Carey	11/23/98

DRAWING TITLE: 14~16 AWG Butt Splice			
SIZE A	DWG. NO. 1685	ELECTRONIC FILE 92N3606.dwg	REV A
SCALE: NTS	U.O.M.: INCHES [mm]	SHEET: 1 OF 1	