FILE NO. AA-CD-205-03

NOTES:

① MAT'L: COPPER, STOCK TKN .028 $^{+.001}_{-.000}$
PLATING: ELECTRO-TIN (.0003 MIN)

② INSULATION: MOLDED PVC (RED)

③ "UL" LISTING #E32244
"CSA" LISTING 18689

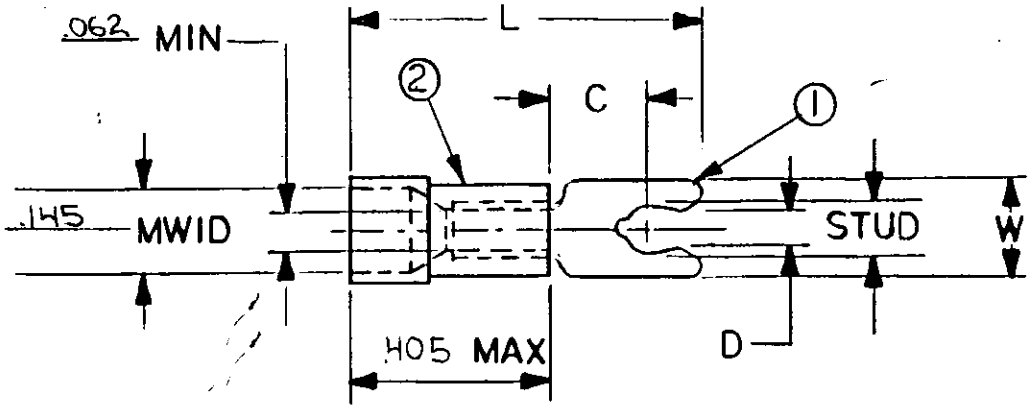

MWID = MAX. WIRE INSULATION DIA.

WIRE SIZE: 22-18 AWG.
.25-1.5 MM²

PART NUMBER	"W" ±.010	"C" MIN.	"L" MAX.	"D" ±005			AVAILABLE STUD SIZES	
AA-2714-	.310	.261	.871	.139			08X(.173 ±.005)	
AA-2715-	.330	.261	.919	.156			10X(.198 ±.005)	

DIMENSIONAL TOLERANCES UNLESS OTHERWISE SPECIFIED			REFERENCE	SCALE: NTS	DATE	TITLE: SNAP SPADE SHORT TONGUE TERMINAL. INSULKRIMP SERIES	ETC molex INCORPORATED	
FRAC.	DEC.	ANG.		DRWN. BY: GY	4-5-85			
±	±	±		CHKD. BY:			DWG. NO. A	CUSTOMER DWG.
				APPRD. BY:				

Downloaded from Elcodis.com electronic components distributor