


ALL RIGHTS RESERVED. NO PORTION OF THIS PUBLICATION, WHETHER IN WHOLE OR IN PART CAN BE REPRODUCED WITHOUT THE EXPRESS WRITTEN CONSENT OF SPC TECHNOLOGY.

REVISIONS			DOC. NO. SPC-F004 * Effective: 12/21/98 * DCP No: 880					
DCP #	REV	DESCRIPTION	DRAWN	DATE	CHECKED	DATE	APPRVD	DATE
138	A	RELEASED	JWM	10/15/98	JC	1/26/00	DJC	2/7/00

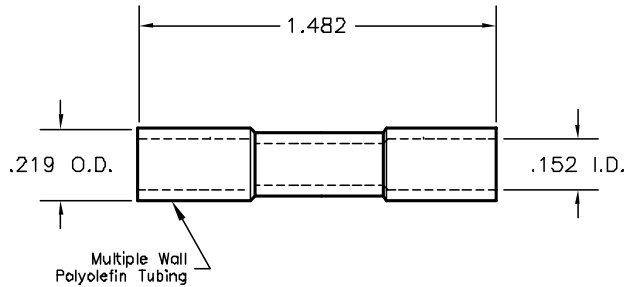

NOTES:

Bare Part

1. Material: Copper
2. Finish: Electro-Tin Plate
3. Seamless

Tubing

1. Multiple Wall Polyolefin
2. Meltable, Integral Inner Wall
3. Shrink Temperature: 275°F (135°C)
4. Continuous Operating Temp: -67°F (-55°C) to 230°F (110°C)
5. Tensile Strength: 2200 PSI
6. Ultimate Elongation: 500 %
7. Secant Modulus: 2%: 27,000 PSI
8. Specific Gravity: 1.00 Max
9. Longitudinal Change: 5 %
10. Dielectric Strength: 1000 V/Mil
11. Volume Resistivity: 10¹⁵ Ohm-CM
12. Non-Corrosive
13. Water Absorption: <0.1 %
14. Color: Red

SPC-F004.DWG

DISCLAIMER
ALL STATEMENTS AND TECHNICAL INFORMATION CONTAINED HEREIN ARE BASED UPON INFORMATION AND/OR TESTS WE BELIEVE TO BE ACCURATE AND RELIABLE. UNDER CONDITIONS OF USE ARE BEYOND OUR CONTROL, THE USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT FOR THE INTENDED USE AND ASSUME ALL RISK AND LIABILITY THEREAFTER IN CONNECTION THEREWITH.



SPC TECHNOLOGY

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE FOR REFERENCE PURPOSES ONLY.

DRAWN BY:	DATE:
Jeff McVicker	10/15/99
CHECKED BY:	DATE:
JOHN COLE	1/26/00
APPROVED BY:	DATE:
Daniel Carey	2/7/00

DRAWING TITLE:

Butt Connector, 18-20 AWG

SIZE DWG. NO.

A 3961

ELECTRONIC FILE

84N979.DWG

REV

A

SCALE: NTS

U.O.M.: INCHES [mm]

SHEET: 1 OF 1