
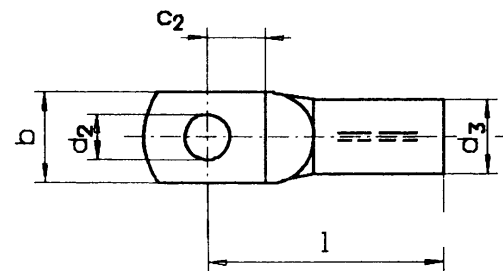
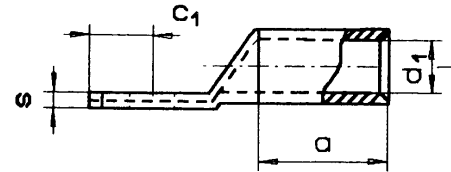


# STA-KON®

## Copper Tube Terminals

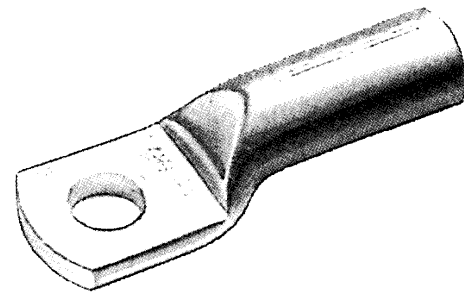

### Uninsulated Copper Tube Terminals

| Part No. | Wire Size<br>mm <sup>2</sup> | Stud Size | WKZ | l  | c <sub>1</sub> | Dimensions mm |     |                |                | Weight<br>kg/100 | Pack<br>Size |
|----------|------------------------------|-----------|-----|----|----------------|---------------|-----|----------------|----------------|------------------|--------------|
|          |                              |           |     |    |                | b             | s   | d <sub>1</sub> | d <sub>2</sub> |                  |              |
| T 2.5-4* | 2.5                          | M 4       |     | 13 | 4              | 7.5           | 1.2 | 2.3            | 4.3            | 0.13             |              |
| T 4-6*   | 4                            | M 6       |     | 19 | 6.5            | 10            | 1.2 | 3              | 6.5            | 0.24             | 100          |
| T 6-5    | 6                            | M 5       | 5   | 24 | 6.5            | 8.5           | 1.5 | 3.8            | 5.3            | 0.31             | 100          |
| T 6-6    |                              | M 6       |     |    | 7.5            | 8.5           | 1.5 |                | 6.4            | 0.30             |              |
| T 10-6   | 10                           | M 6       |     |    | 7.5            | 9             | 1.5 |                | 6.4            | 0.36             |              |
| T 10-8   |                              | M 8       | 6   | 27 | 10             | 13            | 1.3 | 4.5            | 8.4            | 0.39             | 100          |
| T 10-10  |                              | M 10      |     |    |                | 12            | 17  | 1.5            |                | 10.5             | 0.37         |
| T 16-6   | 16                           | M 6       |     |    | 7.5            | 13            |     |                | 6.4            | 1.18             |              |
| T 16-8   |                              | M 8       | 8   | 36 | 10             | 13            | 2.5 | 5.5            | 8.4            | 1.18             | 100          |
| T 16-10  |                              | M 10      |     |    |                | 12            | 17  |                |                | 10.5             | 1.20         |
| T 25-6   | 25                           | M 6       |     |    | 7.5            | 14            |     |                | 6.4            | 1.49             |              |
| T 25-8   |                              | M 8       | 10  | 38 | 10             | 16            | 3   | 7              | 8.4            | 1.57             | 100          |
| T 25-10  |                              | M 10      |     |    |                | 12            | 17  |                |                | 10.5             | 1.58         |
| T 25-12  |                              | M 12      |     |    | 13             | 19            |     |                | 13             | 1.54             |              |
| T 35-8   | 35                           | M 8       | 12  | 42 | 10             | 17            | 3.5 | 8.2            | 8.4            | 2.75             | 100          |
| T 35-10  |                              | M 10      |     |    |                | 12            | 19  |                |                | 10.5             | 2.85         |
| T 50-8   | 50                           | M 8       |     |    | 10             | 20            |     |                | 8.4            | 4.50             |              |
| T 50-10  |                              | M 10      | 14  | 52 |                | 12            | 22  | 4              | 10             | 10.5             | 4.50         |
| T 70-10  | 70                           | M 10      | 16  | 55 | 12             | 24            | 4.5 | 11.5           | 10.5           | 6.15             | 50           |
| T 95-10  | 95                           | M 10      | 18  | 65 | 12             | 28            | 5   | 13.5           | 10.5           | 9.15             | 50           |
| T 120-10 | 120                          | M 10      | 20  | 70 | 15             | 32            | 5.5 | 15.5           | 10.5           | 11.40            | 50           |
| T 150-10 |                              | M 10      |     |    | 15             |               |     |                | 10.5           | 16.40            |              |

\*According to DIN 40500 Ringform with inspection hole  
For Tooling see page 182-194

