

4

3


2

1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION  
 © COPYRIGHT 19 BY AMP INCORPORATED. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS				
P	LTR	DESCRIPTION	DATE	DWN	APVD	
G	14	REDRAWN PER EC 0720-0432-94	28NOV94	GV	ME	

<b>AMP</b> WIRE RANGE	E13288	LR7189 Certified
- - SOLID OR STRANDED	- - SOLID OR STRANDED	- - SOLID OR STRANDED

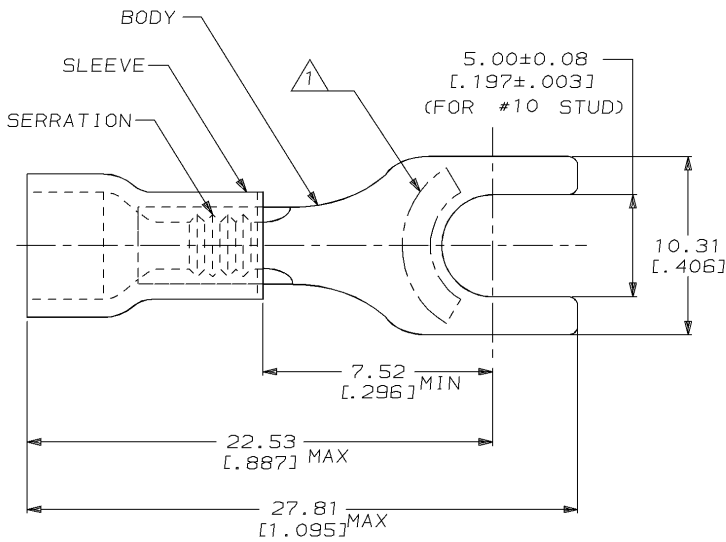

- △ STAMP AMP 12-10\* LOCATE APPROX AS SHOWN  
 2. WIRE INSUL DIA, 3.81 TO 5.84 [.150 TO .230]  
 3. TONGUE MATL THK, 1.02 ± 0.05 [.040 ± .002]

25	LOOSE PIECE, BAG	8-34176-5
4	LOOSE PIECE, BLS	8-34176-4
100	LOOSE PIECE, BOX	8-34176-1
2500	ON TAPE, REEL	2-34176-1
500	LOOSE PIECE	34176
QTY	PACKAGE TYPE	PART NO

AMP INCORPORATED CUSTOMER SERVICE SYSTEM		MAX RECOMMENDED OPERATING TEMPERATURE: 90°C [194°F]	THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.		DWN G VINSON 28NOV94	<b>AMP</b> AMP Incorporated Harrisburg, PA 17105-3608
FOR ADDITIONAL PRODUCT INFORMATION OR COPIES OF DRAWINGS AND TECHNICAL DOCUMENTS	PRODUCT INFORMATION CENTER 1-800-522-6752	VOLTAGE RATING: 600V MAX (1000V FIXTURE OR SIGN)	DIMENSIONS: mm [in]	TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ±- 1 PLC ±- 2 PLC ±0.20 (.008) 3 PLC ±- 4 PLC ±- ANGLES ±- FINISH -	CHK M ELLIS 28NOV94	
FOR APPLICATION TOOLING INFORMATION	TOOLING ASSISTANCE CENTER 1-800-722-1111	CIRCULAR MIL AREA: 2.62mm <sup>2</sup> - 6.64mm <sup>2</sup> [5180 - 13100]		MATERIAL BODY, CU PER ASTM B152 SLEEVE, PVC, YELLOW	APVD G NGO 28NOV94	PRODUCT SPEC UL 486A
FOR ORDER ENTRY	1-800-526-5142				APPLICATION SPEC	WEIGHT -
AMP 1470-19 REV 09MAY94						SIZE A3
29 NOV 1994 12:50:19 AMP11525 <UJ128A>DEPT1132>AMP11525>U.SPADE-U.CUST						CAGE CODE 00779
						DRAWING NO C-34176
						SCALE 6:1
						SHEET 1 OF 1
						REV 6
						CUSTOMER DRAWING