


ALL RIGHTS RESERVED. NO PORTION OF THIS PUBLICATION, WHETHER IN WHOLE OR IN PART CAN BE REPRODUCED WITHOUT THE EXPRESS WRITTEN CONSENT OF SPC TECHNOLOGY.

REVISIONS		DOC. NO.	SPC-F005	Effective:	12/21/98	Doc No.	880	
DOP #	REV	DESCRIPTION	DRAWN	DATE	CHECKD	DATE	APPRVD	DATE
170	A	RELEASED	HYO	12/21/99	JJC	11/1/99	DJC	12/28/99

1. SPECIFICATIONS:
 INSULATOR: POLYACETAL
 JACK BODY: BRASS, NICKEL PLATED
 NUT: BRASS, NICKEL PLATED, 2 PIECES
2. RATING:
 VOLTAGE: 500V
 CURRENT: 36A MAX.
 TEMPERATURE: -20° C TO +80° C
3. MAXIMUM PANEL THICKNESS: .20 (5.1)
4. COLOR: BLACK

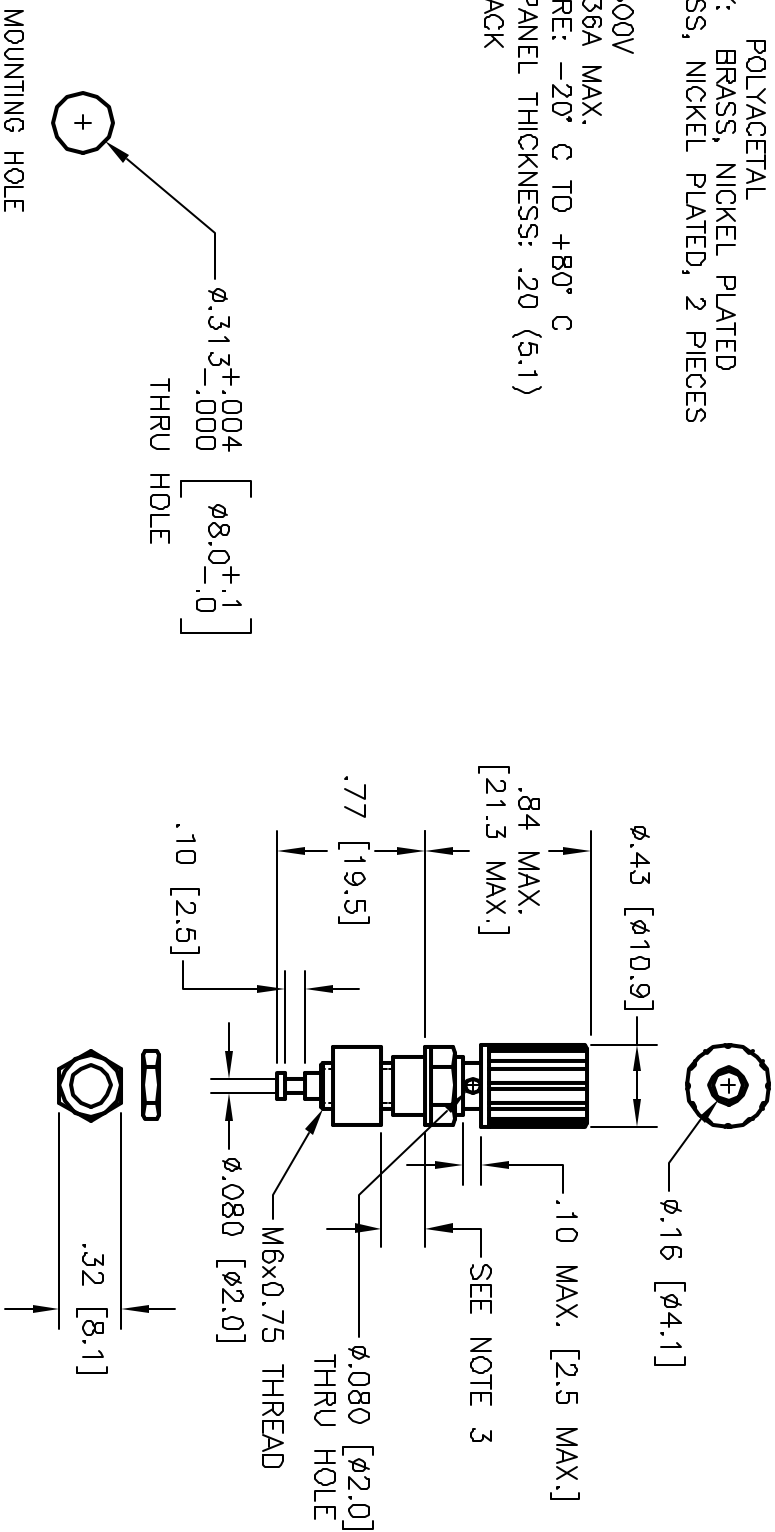

DISCLAIMER
 ALL STATEMENTS AND TECHNICAL INFORMATION CONTAINED HEREIN ARE BASED UPON INFORMATION AND/OR TESTS WE BELIEVE TO BE ACCURATE AND RELIABLE. SINCE CONDITIONS OF USE ARE BEYOND OUR CONTROL, THE USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT FOR THE INTENDED USE AND ASSUME ALL RISK AND LIABILITY WHEREVER IN CONNECTION THERETHIN.



SPC TECHNOLOGY

Tolerances Unless
 Otherwise Specified

Decimals
 .XX ± .001
 .XXX ± .005

DRAWN BY:	DATE:
HISHAM ODISH	12/21/99
CHECKED BY:	DATE:
JOHN COLE	11/1/99
APPROVED BY:	DATE:
DANIEL CAREY	12/28/99

DRAWING TITLE:

4mm INSULATED BINDING POST, SOLDER TURRET

SIZE DWG. NO.

A 2301

ELECTRONIC FILE

92N4663.DWG

REV

A

SCALE: NTS

U.O.M.: INCHES [mm]

SHEET: 1 OF 1