


ALL RIGHTS RESERVED. NO PORTION OF THIS PUBLICATION, WHETHER IN WHOLE OR IN PART CAN BE REPRODUCED WITHOUT THE EXPRESS WRITTEN CONSENT OF SPC TECHNOLOGY.

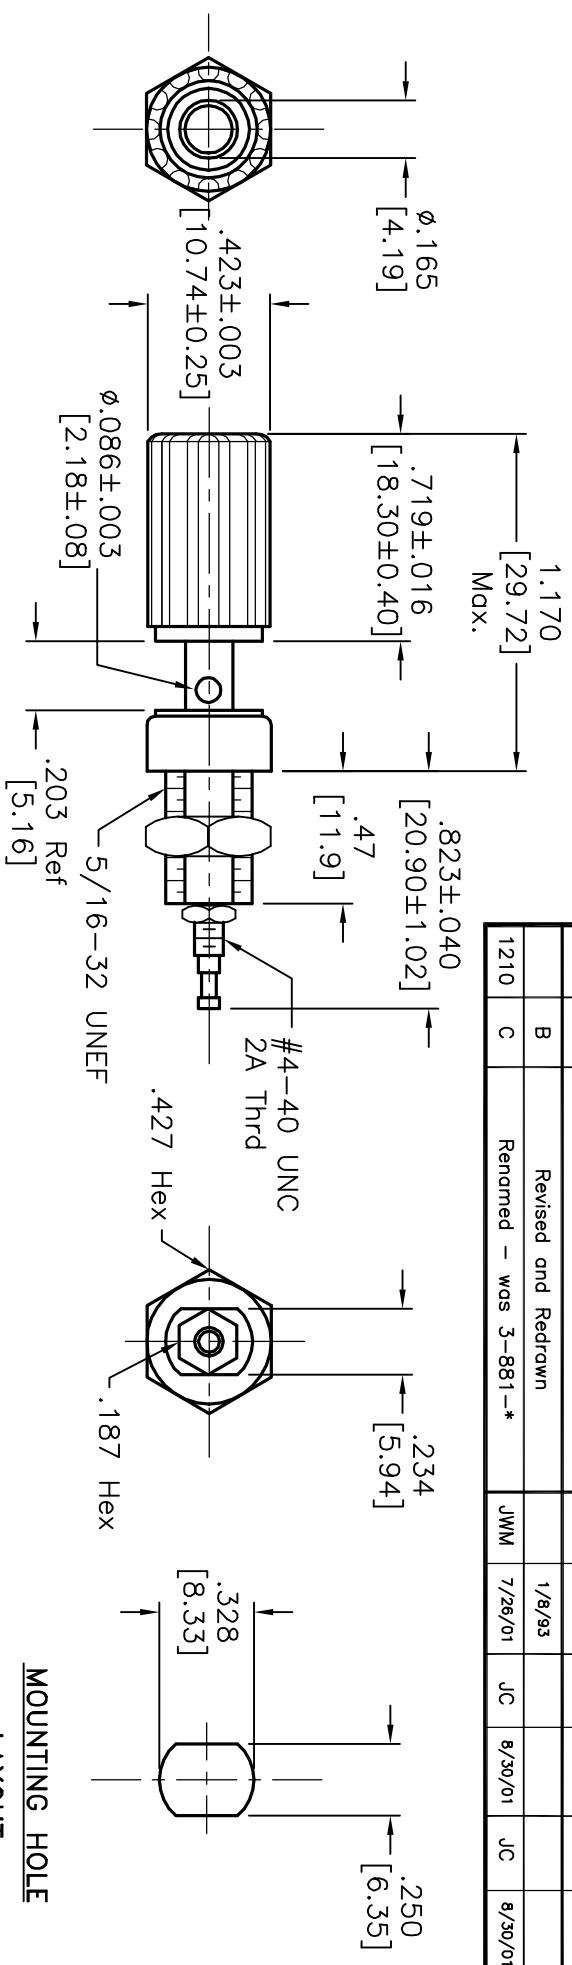

REVISIONS		DOC. NO. SPC-F005	* Effective: 12/21/98	* DCP No: 680				
DCP #	REV	DESCRIPTION	DRAWN	DATE	CHECKD	DATE	APPRVD	DATE
B		Revised and Redrawn	JWM	1/8/93				
1210	C	Renamed - was 3-881-*	JWM	7/26/01	JC	8/30/01	JC	8/30/01

MOUNTING HOLE LAYOUT

PART NUMBER	COLOR
3-881-BK	BLACK
3-881-GR	GREEN
3-881-R	RED
3-881-W	WHITE
3-881-Y	YELLOW

- NOTES:**
- MATERIAL: BRASS PER QQ-B-626D
STUD: SILVER
FINISH: SILVER
 - INSULATING MATERIAL: NYLON 66 PER ASTM D4066
THUMB NUT: NYLON 66 PER ASTM D4066
 - HARDWARE: GOLD PLATED NUTS
 - PANEL THICKNESS: UP TO .281" [7.14 MM]
 - CURRENT RATING: 15 AMPS
 - FLAMMABILITY: UL94V-2 SELF-EXTINGUISHING
 - CONTINUOUS USE TEMPERATURE: -40°F (-40°C) TO 185°F (85°C)
 - BREAKDOWN VOLTAGE: 5700 Vrms MINIMUM
 - STUD-TO-PANEL CAP.: 3.3 pF NOMINAL
 - CONTACT RESISTANCE: N.A.
 - FEATURES TURRET TERMINAL OF INSTALLATION
 - HAS A CAPTIVE THUMB NUT
 - INSULATED BODY IS FLATTENED TO PREVENT TURNING.
 - WEIGHT: .015 LBS.
 - BODY THREAD STRIPPING TORQUE: 6.0 IN. LBS [7.0 KG CM]

DISCLAIMER:
ALL STATEMENTS AND TECHNICAL INFORMATION CONTAINED HEREIN ARE BASED UPON INFORMATION AND/OR TESTS WE BELIEVE TO BE ACCURATE AND RELIABLE SINCE CONDITIONS OF USE ARE BEYOND OUR CONTROL. THE USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT FOR THE INTENDED USE AND ASSUME ALL RISK AND LIABILITY WHATSOEVER IN CONNECTION THEREWITH.



Tolerances Unless Otherwise Specified:
X=±.015
XX=±.010
XXX=±.005

DRAWN BY: JP	DATE: 1/8/93	DRAWING TITLE: Binding Posts (Standard)	
CHECKED BY: JOHN COLE	DATE: 1/15/93	SIZE: A	DWG. NO. TA-377
APPROVED BY: J Liska	DATE: 1/19/93	SCALE: NTS	ELECTRONIC FILE TA-377.dwg
			REV C