

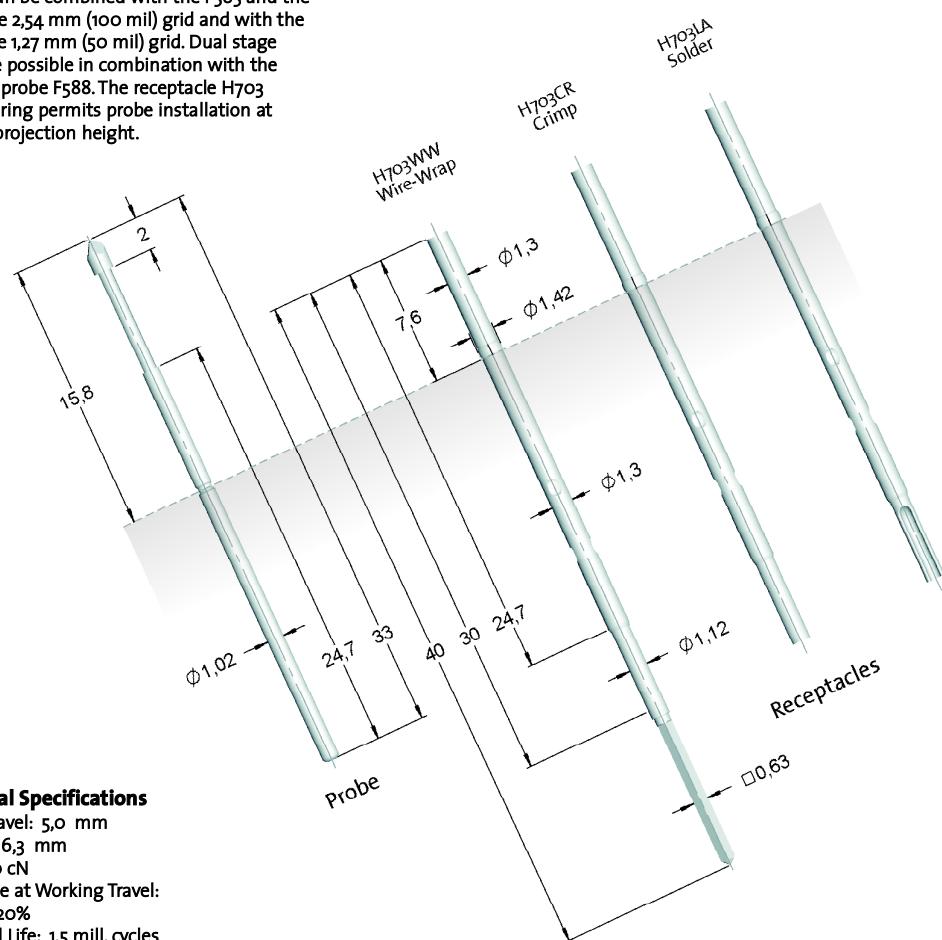
For In-Circuit- and Functional Test (ICT/FCT)

Centers 1,90 mm/75 mil

	Current	Temperature
Standard	3,0 A	-20°...+80° C

F703

The F703 can be combined with the F585 and the F786 for the 2,54 mm (100 mil) grid and with the F788 for the 1,27 mm (50 mil) grid. Dual stage fixtures are possible in combination with the long travel probe F588. The receptacle H703 with press-ring permits probe installation at a variable projection height.

**Mechanical Specifications**

Working Travel: 5,0 mm

Full Travel: 6,3 mm

Preload: 30 cN

Spring Force at Working Travel:

180 cN ± 20%

Mechanical Life: 1,5 mill. cycles

Pointing Accuracy: ± 0,08 mm

Electrical Specifications

Constant Current: 3,0 A

Typical Probe Resistance: 30 mOhm

Material and Finishes

Plunger: see Tip Style

Barrel: Nickel Silver, Gold plated

Spring: Music Wire, Silver plated

Receptacle: Nickel Silver, Gold plated

Order Example

Type	Tip Style	Material	Tip Diameter	Plunger Finish	Spring Force	Special Version (optional)
F703	06	B	130	G	180	IK
Material: B = BeCu, S = Steel						
Tip Diameter: 1,3 mm = 130						
Plunger Finish: G = Gold plated, L = Longtime gold plated						
Special Version: IK = Insulation Head Receptacle: Order Number see drawing						