


**L1361/1 PATTERN 3 TERMINAL, PANEL SEALED**

Qualification approved for Service's use and panel sealed. Spec: DEF: 5335  
This terminal has a 4mm socket in the head and a large clamping gap with unique pyramid shaped teeth for piercing the wire insulant. This obviates the need for wire stripping and it will accommodate even a single 40 s.w.g. (0.122mm) conductor without fracturing it.

<b>CURRENT RATING:</b>	<b>10A</b>
<b>TEMPERATURE RANGE:</b>	<b>-25° C to +70° C</b>
<b>MATERIALS:</b>	<b>Head, phenolic resin Stem, brass, nickel plated, solder post tin dipped</b>
<b>COLOUR:</b>	<b>Black</b>
<b>WEIGHT:</b>	<b>11.8g average</b>
<b>LEAKAGE, WHEN USED WITH 02 PANEL FITTING:</b>	<b>≤1 cc/h @ 20 lbf / in 138 kPa</b>
<b>HUMIDITY:</b>	<b>H1</b>
<b>WIRE SIZE (MAXIMUM):</b>	<b>4mm diameter</b>

**ORDERING REFERENCE: L1361/1**

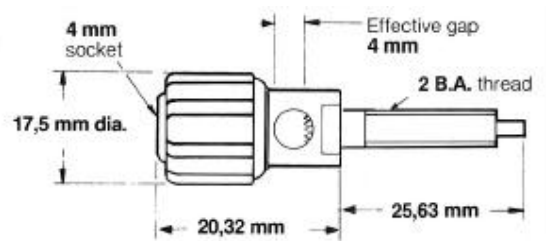

BLP reserve the right to change without prior notice the information contained within this leaflet

**BLP Components Ltd., Exning Road, Newmarket, Suffolk, CB8 0AX, England**  
Tel: +44 (0)1638 665161 Fax: +44 (0)1638 660718 email: [sales@blpcomp.com](mailto:sales@blpcomp.com) <http://www.blpcomp.com>