

MPR

+105°C Metallized Polypropylene Epoxy Dipped Radial Lead Capacitors



- Bypass
- Filtering
- Coupling
- Audio
- Timing
- Blocking

Operating Temperature Range		-55°C to 105°C		
Capacitance Tolerance		±10% at 1kHz, 25°C		
Voltage Range	WVDC	250	400	630
	VAC	200	220	250
Dissipation Factor		.1% at 1 kHz, 25°C		
Insulation Resistance @20°C for 1 minute at 100 VDC		Capacitance	Insulation Resistance	
		≤0.33 μF	100,000 MΩ	
		>0.33 μF	30,000 MΩ x μF	
Load Life		2,000 hours, +85°C with 125% rated DC voltage		
		Capacitance Change	≤3% maximum	
		Dissipation Factor Change	<125% maximum specification	
		Insulation Resistance	≥50% of minimum initial limits	
Humidity Test		250 hours, 95% RH, 25°C and no applied voltage		
		Capacitance Change	<5% of initial readings +25°C, 1kHz	
		Dissipation Factor Change	< 200% of initial +25°C, 1kHz	
		Insulation Resistance	≥ 3000MΩ x μF (need not exceed 5000MΩ)	
Self-inductance		≤1 nH/mm along the capacitor pitch		
Dielectric Strength		150% of rated WVDC for 5 seconds at 25°C		
Capacitance Drift Factor		(after 2 years) ≤0.5% up to 40°C		
Capacitance Temperature Coefficient		-200 ppm/°C, ± 100ppm/°C		
Type		Extended metallized film		
Dielectric		Polypropylene film		
Electrodes		Vacuum deposited aluminum layers		
Leads		Tinned copper wire		
Coating		Flame retardant epoxy sealed resin (UL94V-O)		



ILLINOIS CAPACITOR, INC. 3757 W. Touhy Ave., Lincolnwood, IL 60712 • (847) 675-1760 • Fax (847) 673-2850 • www.illcap.com

MPR

+ 105°C Metallized
Polypropylene Epoxy
Dipped Radial Lead
Capacitors

STANDARD PART LISTING

Capacitance (µF)	WVDC	IC [®] PART NUMBER	dv/dt (v/µs)	L x H x T
0.01	400	103MPR400K	350	13x9x5
0.01	630	103MPR630K	420	13x10x6
0.015	250	153MPR250K	220	13x9x5
0.015	400	153MPR400K	350	13x9.5x5
0.015	630	153MPR630K	420	13x11x7
0.022	250	223MPR250K	220	13x9x5
0.022	400	223MPR400K	350	13x10.5x5.5
0.022	630	223MPR630K	420	13x12.5x8.5
0.033	250	333MPR250K	220	13x9x5.5
0.033	400	333MPR400K	350	13x11x6.5
0.033	630	333MPR630K	400	18x11.5x7.5
0.047	250	473MPR250K	220	13x9.5x5.5
0.047	400	473MPR400K	350	13x11x7.5

Capacitance (µF)	WVDC	IC [®] PART NUMBER	dv/dt (v/µs)	L x H x T
0.047	400	473MPR400K	350	13x11x7.5
0.047	630	473MPR630K	400	18x13.5x8.5
0.068	250	683MPR250K	220	13x10.5x6
0.068	400	683MPR400K	300	18x11x6.5
0.068	630	683MPR630K	400	18x15.5x9.5
0.1	250	104MPR250K	220	13x11x7
0.1	400	104MPR400K	300	18x12.5x7.5
0.1	630	104MPR630K	230	26x15x10
0.15	250	154MPR250K	200	18x11x7
0.15	400	154MPR400K	185	26x13x7.5
0.15	630	154MPR630K	230	26x17x11
0.22	250	224MPR250K	200	18x12.5x7.5
0.22	400	224MPR400K	165	26x14x8.5

Capacitance (µF)	WVDC	IC [®] PART NUMBER	dv/dt (v/µs)	L x H x T
0.22	630	224MPR630K	180	31x17.5x10.5
0.33	250	334MPR250K	200	18x13x8.5
0.33	400	334MPR400K	165	26x15x10
0.33	630	334MPR630K	180	31x21.5x13
0.47	250	474MPR250K	110	26x14x8.5
0.47	400	474MPR400K	150	31x16.5x10.5
0.47	630	474MPR630K	180	31x24.5x15.5
0.68	250	684MPR250K	115	26x15x9.5
1	250	105MPR250K	110	26x16x12
1	400	105MPR400K	150	31x22x15
1.5	250	155MPR250K	100	31x18x13
2.2	250	225MPR250K	100	31x21x15

NOTE: WVDC: MAXIMUM RATED DC WORKING VOLTAGE AT + 85°C.


PHYSICAL DIMENSIONS

WVDC (VAC) µF	250 (200)	400 (220)	630 (250)
0.010	→	13x9x5	13x10x6
0.015	13x9x5	13x9.5x5	13x11x7
0.022	13x9x5	13x10.5x5.5	13x12.5x8.5
0.033	13x9x5.5	13x11x6.5	18x11.5x7.5
0.047	13x9.5x5.5	13x11x7.5	18x13.5x8.5
0.068	13x10.5x6	18x11x6.5	18x15.5x9.5
0.10	13x11x7	18x12.5x7.5	26x15x10
0.15	18x11x7	26x13x7.5	26x17x11
0.22	18x12.5x7.5	26x14x8.5	31x17.5x10.5
0.33	18x13x8.5	26x15x10	31x21.5x13
0.47	26x14x8.5	31x16.5x10.5	31x24.5x15.5
0.68	26x15x9.5		
1.0	26x16x12	31x22x15	
1.5	31x18x13		
2.2	31x21x15		

Convert to inches, divide by 25.4

LxHxT(mm)

L	13	18	26	31
S	10.0	15.0	22.5	27.5
G	1.0	1.0	2.0	2.0
d	0.6	0.8	0.8	0.8

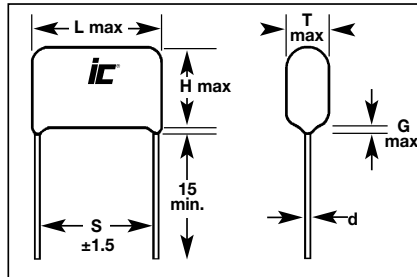

ILLINOIS CAPACITOR, INC. 3757 W. Touhy Ave., Lincolnwood, IL 60712 • (847) 675-1760 • Fax (847) 673-2850 • www.illcap.com

Film Capacitors