


**Metallized Polypropylene Capacitor-Mini Version (M)
MKP Radial Potted Type**

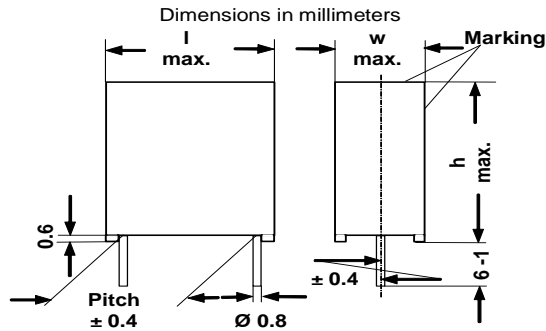

RoHS
Compliant

Lead diameter d_1 (mm)	w (mm)	Pitch (mm)
0.5 ± 0.05	-	5
0.6 ± 0.06	-	7.5 - 10
0.8 ± 0.08	-	15 - 27.5
0.8 ± 0.08	< 16	37.5
1.0 ± 0.1	≥ 16	

APPLICATIONS

High frequency and pulse operations. Deflection circuits in TV-sets (S-correction). SMPS, loudspeaker crossover networks, electronic ballast, storage, filter, timing and sample and hold circuits

REFERENCE STANDARDS

IEC 60384-16

MARKING

C-value; tolerance; rated voltage; manufacturer's type ; code for dielectric material; manufacturer location; manufacturer's logo; year and week;

DIELECTRIC

Polypropylene film

ELECTRODES

Metallized

CONSTRUCTION

Mono and internal series construction

RATED DC VOLTAGES :

250 V, 400 V, 630 V, 1000 V,

RATED AC VOLTAGES :

160 V, 220 V, 250 V/ 400 V, 500 V,

FEATURES

5 to 37.5 mm lead pitch. Supplied loose in box, taped on reel and Ammopack
RoHS compliant

ENCAPSULATION

Plastic case, epoxy resin sealed, flame retardant
UL-class 94 V-0

CLIMATIC TESTING CLASS ACC.TO EN 60068-1

55/100/56

CAPACITANCE RANGE

1000 pF to 6.8 μ F

CAPACITANCE TOLERANCE

$\pm 5\%$, $\pm 2.5\%$, $\pm 2\%$

LEADS

Tinned wire

MAXIMUM APPLICATION TEMPERATURE


100°C

DETAIL SPECIFICATION

For more detailed data and test requirements contact:

dc-film@Vishay.com

COMPOSITION OF CATALOGUE NUMBER

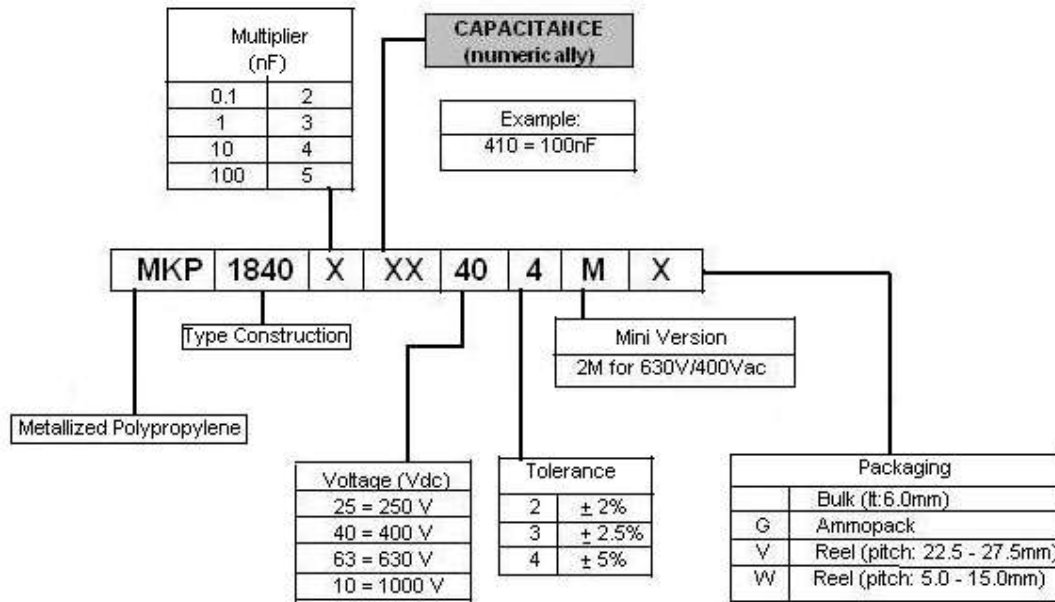

Notes

1. For detailed tape specifications refer to Packaging information" www.vishay.com/doc?28139

SPECIFIC REFERENCE DATA

DESCRIPTION		VALUE		
		at 1KHz	at 10KHz	at 100KHz
Tangent of loss angle:				
C ≤ 0.1 μF		≤ 4 X 10 ⁻⁴	≤ 6 X 10 ⁻⁴	≤ 40 X 10 ⁻⁴
0.1 μF < C ≤ 1.0 μF		≤ 4 X 10 ⁻⁴	≤ 10 X 10 ⁻⁴	-
C > 1.0 μF		≤ 10 X 10 ⁻⁴	-	-
Pitch (mm)	Maximum pulse rise time (dU/dt) _R [V /μs]			
	250 V dc	400 V dc	630 V dc	1000 V dc
5	360	540	1080	-
7.5	215	325	510	-
10	150	240	340	1365
15	90	135	185	680
22.5	55	80	110	370
27.5	40	65	85	285
37.5	30	45	60	195
If the max. pulse voltage is less than the rated voltage higher dU/dt values can be permitted.				
R between leads, for C ≤ 1.0 μF at 100 V; 1 minute		> 100000 MΩ		
RC between leads, for C 1.0 μF at 100 V; 1 minute		> 100000 s		
R between leads and case; 100 V; 1 minute		> 30000 MΩ		
Withstanding (DC) voltage (Cut off current 10mA) rise time 100 V/S		1.6 X U _{Rdc} ; 1 Minute		
Withstanding (DC) voltage between leads and case		500 V; 1 Minute		
Maximum application temperature		100°C		



Metalized Polypropylene Film capacitor ,Mini Version (-M)

Capacitance	Capacitance Code	VOLTAGE CODE 25 250 V dc/160 V ac				VOLTAGE CODE 40 400 Vdc /220 Vac **				VOLTAGE CODE 63 630 Vdc /250 Vac**			
		w (mm)	h (mm)	l (mm)	Pitch (mm)	w (mm)	h (mm)	l (mm)	Pitch (mm)	W (mm)	h (mm)	l (mm)	Pitch (mm)
1000 pF	-210	-	-	-	-	-	-	-	-	3.0	6.5	7.5	5.0
1500 pF	-215	-	-	-	-	-	-	-	-	3.0	6.5	7.5	5.0
2200 pF	-222	-	-	-	-	-	-	-	-	3.5	8.5	7.5	5.0
3300 pF	-233	-	-	-	-	-	-	-	-	3.0	8.5	10.0	7.5
4700 pF	-247	-	-	-	-	-	-	-	-	3.0	8.5	10.0	7.5
6800 pF	-268	-	-	-	-	3.0	6.5	7.5	5.0	3.0	8.5	10.0	7.5
0.01 µF	-310	3.0	6.5	7.5	5.0	3.5	8.5	7.5	5.0	4.0	9.0	10.0	7.5
0.015 µF	-315	3.0	6.5	7.5	5.0	3.0	8.5	10.0	7.5	4.5	9.5	10.3	7.5
0.022 µF	-322	3.5	8.5	7.5	5.0	4.0	9.0	10.0	7.5	4.5	9.5	13.0	10.0
0.033 µF	-333	3.5	8.5	7.5	5.0	4.5	9.5	10.3	7.5	5.5	10.5	13.0	10.0
0.047 µF	-347	4.0	9.0	10.0	7.5	5.0	10.5	10.3	7.5	6.5	11.5	13.0	10.0
0.068 µF	-368	4.0	9.0	10.0	7.5	5.7	11.5	10.3	7.5	6.0	12.0	18.0	15.0
0.10 µF	-410	5.0	10.5	10.3	7.5	5.5	10.5	18.0	15.0	6.0	12.0	18.0	15.0
0.15 µF	-415	5.5	10.5	13.0	10.0	6.0	12.0	18.0	15.0	8.5	14.5	18.0	15.0
0.22 µF	-422	6.5	11.5	13.0	10.0	7.5	13.5	18.0	15.0	8.5	17.5	18.0	15.0
0.33 µF	-433	6.5	12.5	18.0	15.0	8.5	17.5	18.0	15.0	9.0	17.0	26.5	22.5
0.47 µF	-447	7.5	13.5	18.0	15.0	7.5	15.5	26.5	22.5	10.5	18.5	26.5	22.5
0.68 µF	-468	8.5	14.5	18.0	15.0	10.5	18.5	26.5	22.5	11.5	20.5	31.5	27.5
1.0 µF	-510	8.5	16.5	16.5	22.5	11.0	21.0	26.5	22.5	13.5	23.5	31.5	27.5
1.5 µF	-515	10.5	18.5	26.5	22.5	13.5	23.5	31.5	27.5	16.5	29.5	31.5	27.5
2.2 µF	-522	11.0	21.0	26.5	22.5	15.0	24.5	31.5	27.5	18.0	33.0	31.5	27.5
3.3 µF	-533	13.5	23.5	31.5	27.5	18.0	28.0	31.5	27.5	20.0	40.0	42.5	37.5
4.7 µF	-547	15.0	24.5	31.5	27.5	18.0	32.5	41.5	37.5	20.0	40.0	42.5	37.5
6.8 µF	-568	14.5	24.5	41.5	37.5	20.0	40.0	42.5	37.5	-	-	-	-

* Ordering code -2M (e.g. MKP 1840 410 635-2M)

Capacitance	Capacitance Code	VOLTAGE CODE 63 630 Vdc /400 Vac**				VOLTAGE CODE 10 1000 Vdc /500 Vac **			
		w (mm)	h (mm)	l (mm)	Pitch (mm)	w (mm)	h (mm)	l (mm)	Pitch (mm)
1000 pF	-210	-	-	-	-	-	-	-	-
1500 pF	-215	-	-	-	-	-	-	-	-
2200 pF	-222	-	-	-	-	-	-	-	-
3300 pF	-233	-	-	-	-	-	-	-	-
4700 pF	-247	-	-	-	-	4.0	9.0	13.0	10
6800 pF	-268	-	-	-	-	4.0	9.0	13.0	10
0.01 µF	-310	4.5	9.5	13.0	10*	5.5	10.5	13.0	10
0.015 µF	-315	5.5	10.5	13.0	10*	6.5	11.5	13.0	10
0.022 µF	-322	6.5	11.5	13.0	10*	5.5	10.5	18.0	15
0.033 µF	-333	5.5	10.5	18.0	15*	6.0	12.0	18.0	15
0.047 µF	-347	6.5	12.5	18.0	15*	7.5	13.5	18.0	15
0.068 µF	-368	7.5	13.5	18.0	15*	8.5	14.5	18.0	15
0.10 µF	-410	6.5	14.5	26.5	22.5*	7.5	15.5	26.5	22.5
0.15 µF	-415	7.5	15.5	26.5	22.5*	9.0	17.0	26.5	22.5
0.22 µF	-422	8.5	16.5	26.5	22.5*	10.5	18.5	26.5	22.5
0.33 µF	-433	11.0	21.0	26.5	22.5*	11.5	20.5	31.5	27.5
0.47 µF	-447	11.5	20.5	31.5	27.5*	13.5	23.5	31.5	27.5
0.68 µF	-468	13.5	23.5	31.5	27.5*	16.5	29.5	31.5	27.5
1.0 µF	-510	16.5	29.5	31.5	27.5*	18.0	33.0	31.5	27.5

Further C-values upon request

Other PCM on request

**Not suitable for mains applications.

Please refer to X-capacitors in our catalog "RFI Suppression Components".

RECOMMENDED PACKAGING:

LETTER CODE	TYPE OF PACKAGING	HEIGHT (H) (MM)	REEL DIAMETER (MM)	ORDERING CODE EXAMPLE	Pitch ≤ 15	Pitch 22,5-27,5	Pitch 37,5
G	AMMO	18.5	S*	MKP 1840- 410 /404- MG	x	-	-
W	REEL	18.5	350	MKP 1840- 410 /404- MW	x	-	-
V	REEL	18.5	500	MKP 1840- 510 /254- MV	-	x	-
G	AMMO	18.5	L*	MKP 1840- 510 /254- MG	-	x	-
-	BULK	-	-	MKP 1840- 510 /254- M	x	x	x

*S = box size 55 x 210 x 340mm (W x H x L)

*L = box size 60 x 360 x 510mm (W x H x L)

*S = box size 55 x 210 x 340mm (W x H x L)

*L = box size 60 x 360 x 510mm (W x H x L)

Example of ordering code:

Type	Capacitance Code	Voltage Code	Tolerance Code	Mini	Packaging Code
MKP 1840	447	63	4	M	G
Tolerance codes: 4 = 5% (J); 3 = 2,5% (H)					

Metallized Polypropylene Film Capacitor, MKP 1840 PCM5, Mini-Version (-5M)

Capacitance	Capacitance Code	VOLTAGE CODE 25 250 V dc/160 V ac				VOLTAGE CODE 40 400 V dc/220 V ac*				VOLTAGE CODE 63 630 V dc/250 V ac*			
		w (mm)	h (mm)	l (mm)	Pitch (mm)	w (mm)	h (mm)	l (mm)	Pitch (mm)	w (mm)	h (mm)	l (mm)	Pitch (mm)
d_c = 0.5 ± 0.05													
3300 pF	-233	-	-	-	-	-	-	-	-	3.5	8.5	7.5	5
4700 pF	-247	-	-	-	-	-	-	-	-	3.5	8.5	7.5	5
6800 pF	-268	-	-	-	-	-	-	-	-	4.5	9.5	7.5	5
0.01 µF	-310	-	-	-	-	-	-	-	-	4.5	9.5	7.5	5
0.015 µF	-315	-	-	-	-	4.5	9.5	7.5	5	5.5	11.5	7.5	5
0.022 µF	-322	-	-	-	-	4.5	9.5	7.5	5	-	-	-	-
0.033 µF	-333	-	-	-	-	5.5	11.5	7.5	5	-	-	-	-
0.047 µF	-347	4.5	9.5	7.5	5	5.5	11.5	7.5	5	-	-	-	-
0.068 µF	-368	5.0	10.0	7.5	5	-	-	-	-	-	-	-	-
0.1 µF	-410	5.5	11.5	7.5	5	-	-	-	-	-	-	-	-

Further C-values upon request

*Not suitable for mains applications.

* S = box size 55 x 210 x 340mm (w x h x l)

LETTER CODE	TYPE OF PACKAGING	HEIGHT (H) (MM)	REEL DIAMETER (MM)	ORDERING CODE EXAMPLE	Pitch 5
G	AMMO	18.5	S*	MKP 1840- 310 /404- 5MG	X
W	REEL	18.5	350	MKP 1840- 310 /404- 5MW	X
-	BULK	-	-	MKP 1840- 310 /404- 5M	X

Example of ordering code:

Type	Capacitance Code	Voltage Code	Tolerance Code	Mini	Packaging Code
MKP 1840	347	25	4	5M	G
Tolerance codes: 4 = 5% (J); 3 = 2,5% (H)					

MOUNTING**NORMAL USE**

The capacitors are designed for mounting on printed-circuit boards. The capacitors packed in bandoliers are designed for mounting on printed-circuit boards by means of automatic insertion machines.

For detailed tape specifications refer to Packaging information www.vishay.com/doc?28139

SPECIFIC METHOD OF MOUNTING TO WITHSTAND VIBRATION AND SHOCK


In order to withstand vibration and shock tests, it must be ensured that the stand-off pips are in good contact with the printed-circuit board:

- For pitches ≤ 15 mm capacitors shall be mechanically fixed by the leads
- For larger pitches the capacitors shall be mounted in the same way and the body clamped.

SPACE REQUIREMENTS ON PRINTED-CIRCUIT BOARD

The maximum length and width of film capacitors is shown in the drawing:

- Eccentricity as in drawing. The maximum eccentricity is smaller than or equal to the lead diameter of the product concerned.
- Product height with seating plane as given by "IEC 60717" as reference: $h_{max} \leq h + 0.4$ mm or $h_{max} \leq h' + 0.4$ mm.

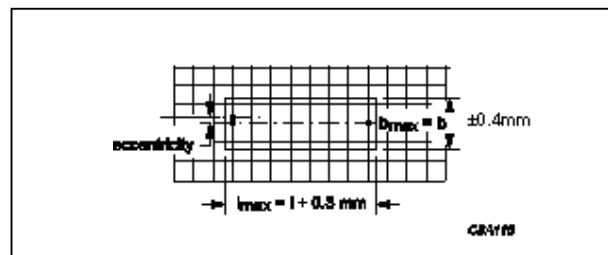**STORAGE TEMPERATURE**

- Storage temperature: T_{stg} = - 25 to +40 °C with RH maximum 80% without condensation


RATINGS AND CHARACTERISTICS REFERENCE CONDITIONS

Unless otherwise specified, all electrical values apply to an ambient temperature of 23 ± 1 °C, an atmospheric pressure of 86 to 106 kPa and a relative humidity of $50 \pm 2\%$.


For reference testing, a conditioning period shall be applied over 96 ± 4 hours by heating the products in a circulating air oven at the rated temperature and a relative humidity not exceeding 20%.

CHARACTERISTICS


Max RMS voltage as a function of frequency

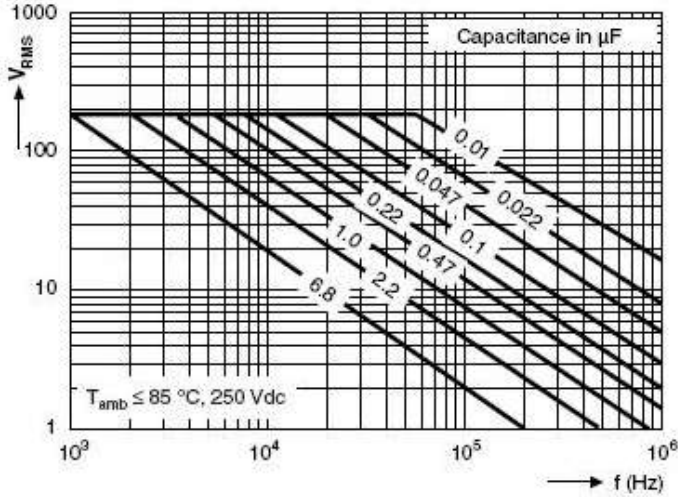


Max RMS voltage as a function of frequency

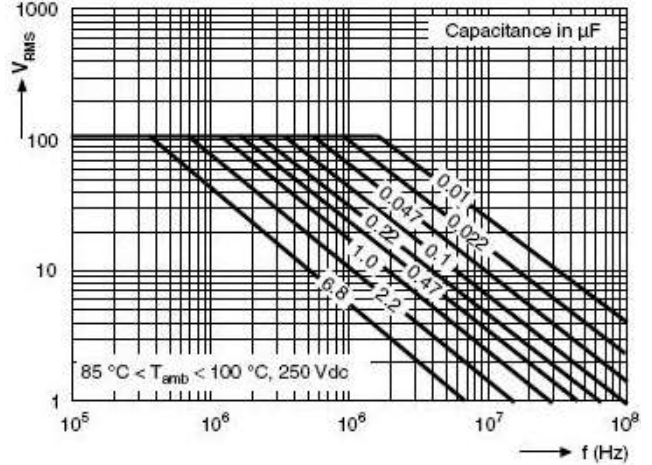


Max RMS voltage as a function of frequency

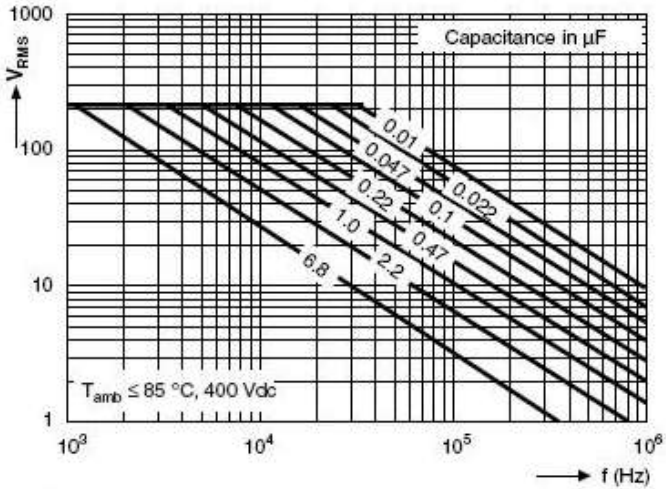


Max RMS voltage as a function of frequency

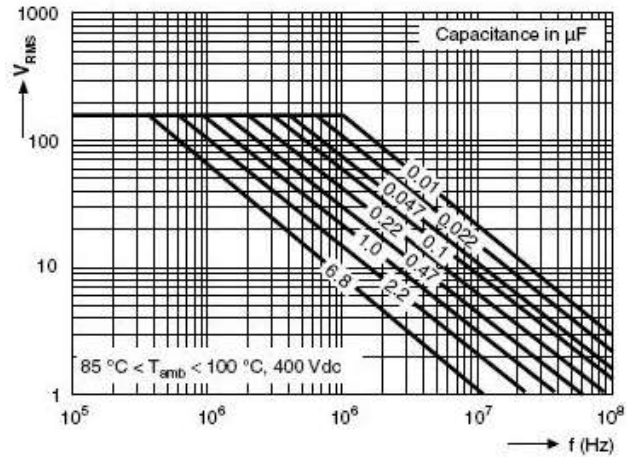


Max RMS voltage as a function of frequency

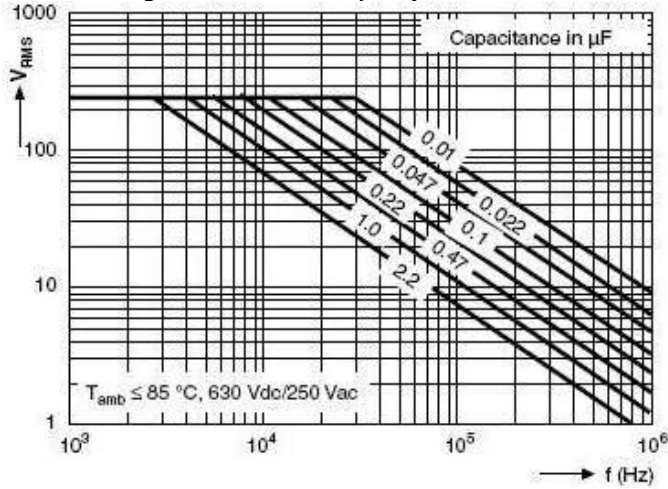


Max RMS voltage as a function of frequency

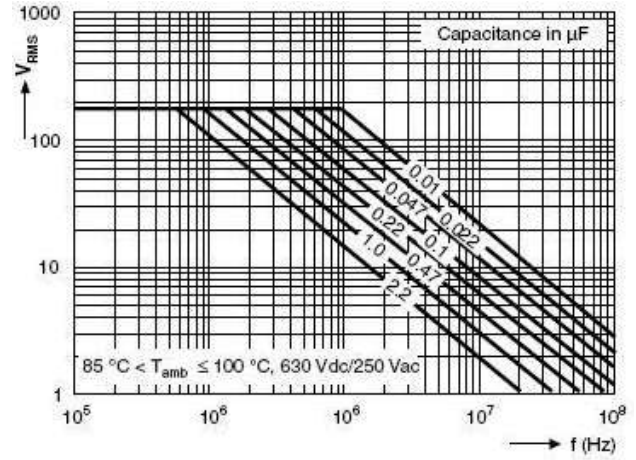


Max RMS voltage as a function of frequency

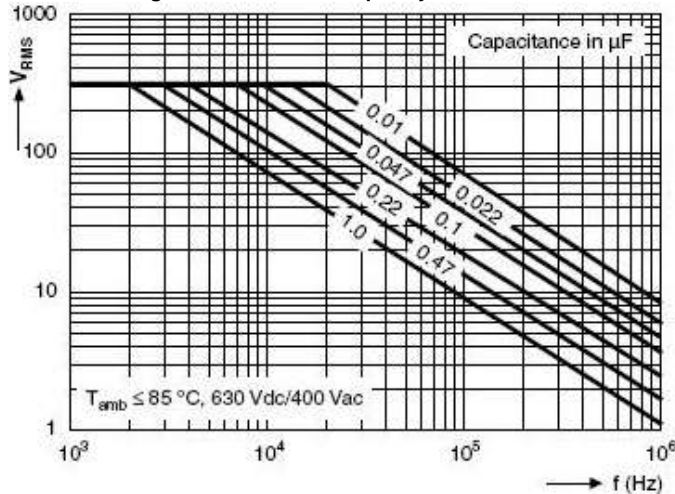


Max RMS voltage as a function of frequency

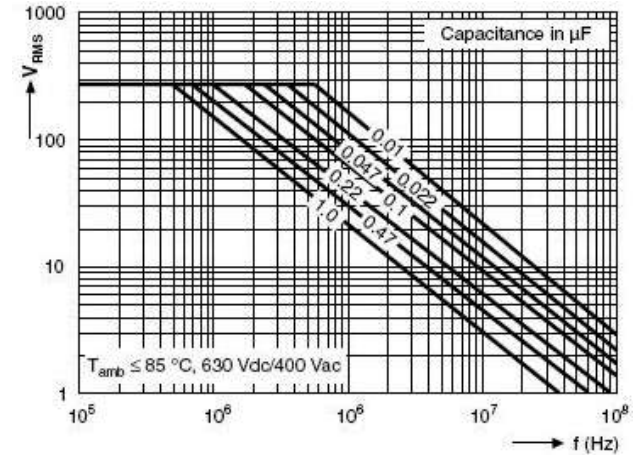

Max RMS voltage as a function of frequency

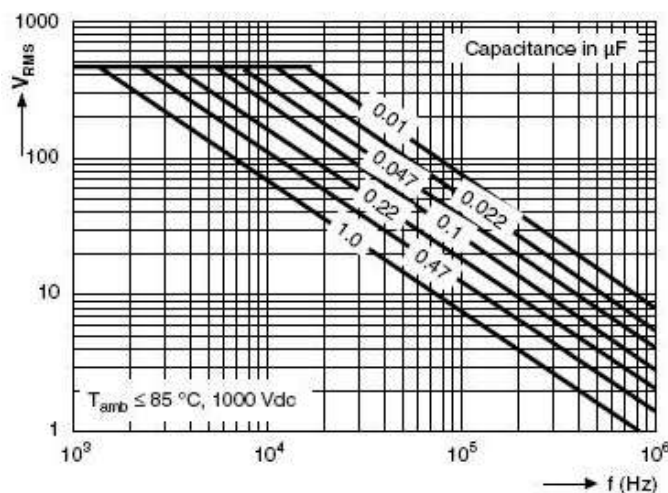

Max RMS voltage as a function of frequency

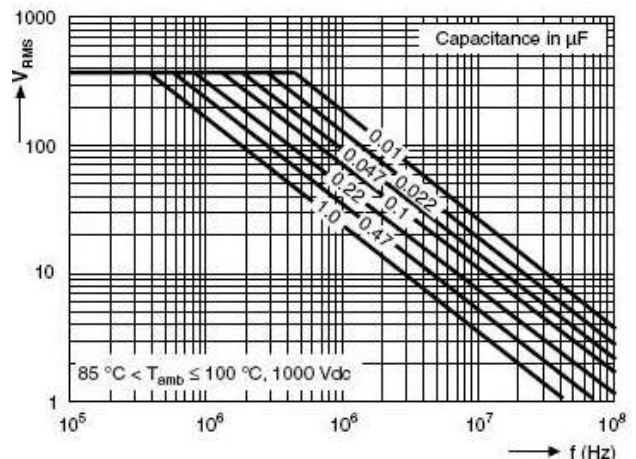

HEAT CONDUCTIVITY (G) AS A FUNCTION OF ORIGINAL PITCH AND CAPACITOR BODY THICKNESS IN mW/°C

W _{max} (mm)	Heat conductivity (mW/°C)						
	Pitch 5 mm	Pitch 7.5 mm	Pitch 10 mm	Pitch 15 mm	Pitch 22.5 mm	Pitch 27.5 mm	Pitch 37.5 mm
3.0	2.5	4.0	-	-	-	-	-
3.5	3.5	-	-	-	-	-	-
4.0	-	5.0	6.0	-	-	-	-
4.5	4.5	5.5	6.5	-	-	-	-
5.0	5.0	6.5	-	-	-	-	-
5.5	6.5	-	7.5	9.0	-	-	-
5.7	-	7.5	-	-	-	-	-
6.0	-	-	-	10.5	-	-	-
6.5	-	-	9.0	11.5	17.0	-	-
7.5	-	-	-	13.5	19.0	-	-
8.5	-	-	-	15.0	16.5	-	-
9.0	-	-	-	-	22.5	-	-
10.5	-	-	-	-	26.5	-	-
11.0	-	-	-	-	30.5	-	-
11.5	-	-	-	-	-	33.5	-
13.5	-	-	-	-	-	41.0	-
14.5	-	-	-	-	-	-	52.0
15.0	-	-	-	-	-	45.0	-
16.5	-	-	-	-	-	57.0	-
18.0	-	-	-	-	-	57.0	-
18.0	-	-	-	-	-	67.0	-
18.0	-	-	-	-	-	-	75.5
20.0	-	-	-	-	-	-	99.0

POWER DISSIPATION AND MAXIMUM COMPONENT TEMPERATURE RISE

The power dissipation must be limited in order not to exceed the maximum allowed component temperature rise as a function of the free air ambient temperature.


The power dissipation can be calculated according Type detail specification "HQN-384-01/101: Technical information film capacitors with the typical tgδ of the curves.

The component temperature rise (ΔT) can be measured (see Section "Measuring the component temperature" for more details) or calculated by $\Delta T = P/G$:

- ΔT = component temperature rise (°C)
- P = power dissipation of the component (mW)
- G = heat conductivity of the component (mW/°C)

MEASURING THE COMPONENT TEMPERATURE

A thermocouple must be attached to the capacitor body as in:

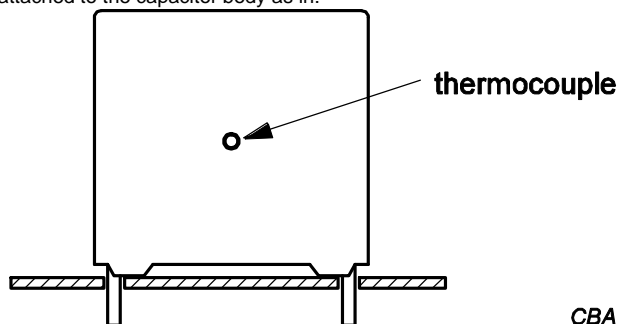

CBA758

CBA758

The temperature is measured in unloaded (T_{amb}) and maximum loaded condition (T_c).

The temperature rise is given by $\Delta T = T_c - T_{amb}$.

To avoid radiation or convection, the capacitor should be tested in a wind-free box.

APPLICATION NOTE AND LIMITING CONDITIONS

These capacitors are not suitable for mains applications as across-the-line capacitors without additional protection, as described hereunder. These mains applications are strictly regulated in safety standards and therefore electromagnetic interference suppression capacitors conforming the standards must be used.

To select the capacitor for a certain application, the following conditions must be checked:

1. The peak voltage (U_p) shall not be greater than the rated DC voltage (U_{Rdc})
2. The peak-to-peak voltage (U_{p-p}) shall not be greater than the maximum (U_{p-p}) to avoid the ionisation inception level
3. The voltage peak slope (dU/dt) shall not exceed the rated voltage pulse slope in an RC-circuit at rated voltage and without ringing. If the pulse voltage is lower than the rated DC voltage, the rated voltage pulse slope may be multiplied by U_{Rdc} and divided by the applied voltage.

For all other pulses following equation must be fulfilled:

$$2 \times \int_0^T \left(\frac{dU}{dt} \right)^2 \times dt < U_{Rdc} \times \left(\frac{dU}{dt} \right)_{rated}$$

T is the pulse duration

4. The maximum component surface temperature rise must be lower than the limits (see graph max allowed component temp rise)
5. Since in circuits used at voltages over 280V peak-to-peak the risk for an intrinsically active flammability after a capacitor breakdown (short circuit) increases, it is recommended that the power to the component is limited to 100 times the values mentioned in the table: "Heat conductivity"
6. When using these capacitors as across-the-line capacitor in the input filter for mains applications or as series connected with an impedance to the mains the applicant must guarantee that the following conditions are fulfilled in any case (spikes and surge voltages from the mains included).

VOLTAGE CONDITIONS FOR 6 ABOVE

ALLOWED VOLTAGES	T_{amb} ≤ 85 °C	85 °C < T_{amb} ≤ 100 °C
Maximum continuous RMS voltage	U_{Rac}	U_{Rac}
Maximum temperature RMS-over voltage (<24 hours)	$1.25 \times U_{Rac}$	$1.25 \times U_{Rac}$
Maximum peak voltage (V_{op}) (<2s)	$1.6 \times U_{Rdc}$	$1.1 \times U_{Rdc}$

Vishay Film Capacitors

INSPECTION REQUIREMENTS

General note:

Sub-clause numbers of tests and performance requirements refer to the "Sectional Specification, publication IEC 60384-16 and specific reference data".

Group C inspection requirements

SUB-CLAUSE NUMBER AND TEST	CONDITIONS	PERFORMANCE REQUIREMENTS
SUB-GROUP C1A PART OF SAMPLE OF SUB-GROUP C1		
4.1 Dimensions (detail) 4.3.1 Initial measurements 4.3 Robustness of terminations 4.4 Resistance to soldering heat 4.14 Component solvent resistance 4.4.2 Final measurements	Capacitance Tangent of loss angle at 10 kHz Tensile and bending Method: 1A Solder bath: 280 °C ± 5 °C Duration: 5 s Isopropylalcohol at room temperature Method: 2 Immersion time: 5 ± 0.5 min Recovery time: Min 1 hour, max 2 hours Visual examination Capacitance Tangent of loss angle	As specified in Chapters "General data" of this specification No visible damage No visible damage Legible marking $ \Delta C/C \leq 2\%$ of the value measured initially. Increase of $\tan \delta$: ≤ 0.002 Compared to values measured in 4.3.1
SUB-GROUP C1B OTHER PART OF SAMPLE OF SUB-GROUP C1		
4.6.1 Initial measurements 4.15 Solvent resistance of the marking 4.6 Rapid change of temperature 4.7 Vibration	Capacitance Tangent of loss angle at 100 kHz Isopropylalcohol at room temperature Method: 1 Rubbing material: cotton wool Immersion time: 5 ± 0.5 min θA = lower category temperature θB = upper category temperature 5 cycles Duration $t = 30$ min Visual examination Mounting: see Section "Mounting" for more information Procedure B4 Frequency range: 10 to 55 Hz. Amplitude: 0.75 mm or Acceleration 98 m/s ² (whichever is less severe) Total duration 6 hours.	No visible damage Legible marking No visible damage
4.7.2 Final inspection 4.9 Shock	Visual examination Mounting: see Section "Mounting" for more information Pulse shape: half sine Acceleration: 490 m/s ² Duration of pulse: 11 ms.	No visible damage



SUB-CLAUSE NUMBER AND TEST	CONDITIONS	PERFORMANCE REQUIREMENTS
4.9.3 Final measurements	Visual examination Capacitance Tangent of loss angle Insulation resistance	No visible damage $ \Delta C/C \leq 2\%$ of the value measured in 4.6.1. Increase of $\tan \delta$: ≤ 0.002 Compared to values measured in 4.6.1 As specified in Section "Insulation Resistance" of this specification
SUB-GROUP C1 COMBINED SAMPLE OF SPECIMENS OF SUB-GROUPS C1A AND C1B		
4.10 Climatic sequence 4.10.2 Dry heat 4.10.3 Damp heat cyclic Test Db, first cycle 4.10.4 Cold 4.10.6 Damp heat cyclic Test Db, remaining cycles 4.10.6.2 Final measurements	Temperature: upper category temperature Duration: 16 hours Temperature: lower category temperature Duration: 2 hours Visual examination Capacitance Tangent of loss angle Insulation resistance	No visible damage Legible marking $ \Delta C/C \leq 3\%$ of the value measured in 4.4.2 or 4.9.3 Increase of $\tan \delta$: ≤ 0.003 Compared to values measured in 4.3.1 or 4.6.1 $\geq 50\%$ of values specified in Section "Insulation resistance" of this specification
SUB-GROUP C2		
4.11 Damp heat steady state 4.11.1 Initial measurements 4.11.3 Final measurements	Capacitance Tangent of loss angle at 1 kHz Visual examination Capacitance Tangent of loss angle Insulation resistance	No visible damage Legible marking $ \Delta C/C \leq 3\%$ of the value measured in 4.11.1. Increase of $\tan \delta$: ≤ 0.002 Compared to values measured in 4.11.1. $\geq 50\%$ of values specified in Section "Insulation resistance" of this specification
SUB-GROUP C3A		
4.12 Endurance DC 4.12.1 Initial measurements 4.12.5 Final measurements	Duration: 2000h $1.25 \times U_{Rdc}$ at 85 °C $0.875 \times U_{Rdc}$ at 100°C Capacitance Tangent of loss angle at 100 kHz Visual examination Capacitance Tangent of loss angle Insulation resistance	No visible damage Legible marking $ \Delta C/C \leq 3\%$ of the value measured in 4.12.1. Increase of $\tan \delta$: ≤ 0.004 Compared to values measured in 4.12.1 $\geq 50\%$ of values specified in Section "Insulation resistance" of this specification
SUB-GROUP C4		
4.2.6 Temperature characteristics Initial measurements Intermediate measurements	Capacitance Capacitance at lower category temperature Capacitance at 20 °C	For -55 °C to +20 °C: $0\% \leq \Delta C/C \leq 2\%$ or



SUB-CLAUSE NUMBER AND TEST	CONDITIONS	PERFORMANCE REQUIREMENTS
<p>Final measurements</p> <p>4.13 Charge and discharge</p>	<p>Capacitance at upper category temperature</p> <p>Capacitance</p> <p>Insulation resistance</p> <p>10000 cycles Charged to U_{Rdc} Discharge resistance:</p> $R = \frac{U_{Rdc}}{2.5xC(dU/dt)}$	<p>for 20 °C to 85 °C: $-3\% \leq \Delta C/C \leq 0\%$</p> <p>As specified in Section "Capacitance" of this specification</p> <p>As specified in Section "Insulation Resistance" of this specification</p>
<p>4.13.1 Initial measurements</p> <p>4.13.3 Final measurements</p>	<p>Capacitance</p> <p>Tangent of loss angle at 100 kHz</p> <p>Capacitance</p> <p>Tangent of loss angle</p> <p>Insulation resistance</p>	<p>$\Delta C/C \leq 3\%$ of the value measured in 4.13.1.</p> <p>Increase of $\tan \delta$: ≤ 0.005 Compared to values measured in 4.13.1</p> <p>$\geq 50\%$ of values specified in Section "Insulation resistance" of this specification.</p>