


Resin-Molded, Radial-Lead Solid Tantalum Capacitors



FEATURES

- Terminations: Tin/lead (SnPb), 100 % Tin (Sn)
- Four case sizes precisely molded with a flame retardant epoxy resin
- Stand off on all case sizes
- Available on tape for automatic insertion equipment (only A- and B-case, C-and D-case on request)
- Low leakage current
- Low impedance
- Extended value ranges available

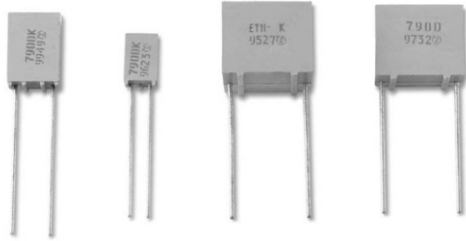


RoHS*
COMPLIANT

PERFORMANCE CHARACTERISTICS

Operating Temperature: - 55 °C to + 125 °C

ORDERING INFORMATION							
790D	157	X0	006	R	2	P	E3
MODEL	CAPACITANCE	CAPACITANCE TOLERANCE	DC VOLTAGE RATING	CASE CODE	STYLE NUMBER	PACKAGING	ROHS COMPLIANT
790D = Standard and Extended Range	Expressed in picofarads. The first two digits are the significant figures. The third is the number of zeros following.	X0 = ± 20 % X9 = ± 10 %	Expressed in volts. To complete the three-digit block, zeros precede the voltage rating. A decimal point is indicated by an "R" (6R3 = 6.3 V)	See Ratings and Case Codes Table	Insulated Case (Standard)	See Taping Specification B : Bulk G : Ammopack H = 16.5 mm H : Ammopack H = 18.5 mm I : Ammopack Shouldered Leads (A case) X : Reel Pack H = 16.5 mm Y : Reel Pack H = 18.5 mm Z : Reel Pack Shouldered Leads (A case)	E3 = 100 % tin termination (RoHS compliant) Blank = SnPb termination

DIMENSIONS in millimeters

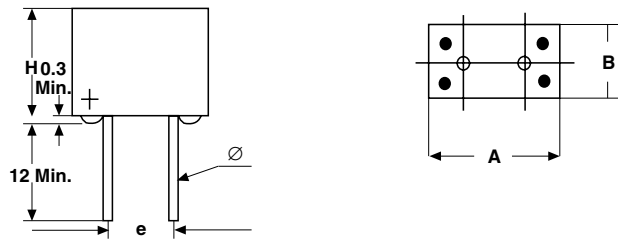

CASE CODE	H MAX. (mm)	A MAX. (mm)	B MAX. (mm)	E ± 0.15 (mm)	Ø 0.05 (+ 10 %) (mm)
A	7.3	4.7	4.2	2.54	0.5
B	10.5	7.3	4.8	5.08	0.5
C	10.5	12.3	7.3	10.16	0.6
D	10.5	12.3	12.3	10.16	0.6

PACKAGING QUANTITIES

CASE CODE	REEL X/Y	AMMO G/H	BULK B
A	1000	1000	500
B	1000	1000	250
C	300*	300*	100
D	200*	200*	50

* Pb containing terminations are not RoHS compliant, exemptions may apply



Resin-Molded, Radial-Lead
Solid Tantalum Capacitors

Vishay Sprague

RATINGS AND CASE CODES																
CR μF	RATED VOLATAGE U_R AT + 85 °C															
	6.3 V		10 V		16 V		20 V		25 V		35 V		40 V		50 V	
	CATEGORY VOLTAGE U_C AT + 125 °C															
	4.0 V		6.3 V		10 V		13 V		16 V		23 V		25 V		32 V	
	Std.	Ext.	Std.	Ext.	Std.	Ext.	Std.	Ext.	Std.	Ext.	Std.	Ext.	Std.	Ext.	Std.	Ext.
0.10														A		A
0.15																A
0.22																A
0.33														A		
0.47														A		
0.68																
1.0														A		
1.5									A					B		A
2.2					A		A							B		B
3.3					A								A	B		B
4.7			A							A				B		B
6.8	A							A						B		B
10						A				B				B	C	C
15				A	B			B			B			C		C
22		A			B			B			B			C		C
33			B			B				C				C		
47	B			B	C			C								
68		B		B	C			C								
100			C		D	C	D									
150	C			C												
220		C	D													
330	D															



STANDARD/EXTENDED RATINGS					
CAPACITANCE C_R (μ F)	CASE CODE	PART NUMBER	MAX. DCL at + 25 °C (μ A)	MAX. DF 120 Hz, at + 25 °C (%)	MAX. IMPEDANCE 100 kHz, at + 25 °C (Ω)
$U_R = 6.3$ V AT + 85 °C, SURGE = 8 V			$U_C = 4$ V AT + 125 °C, SURGE = 5 V		
6.8	A	790D685X(*)6R3A2(#)	1.0	6	4.0
22.0	A	790D226X(*)6R3A2(#)	1.3	6	2.1
47.0	B	790D476X(*)6R3B2(#)	2.9	6	1.3
68.0	B	790D686X(*)6R3B2(#)	4.2	6	1.3
150.0	C	790D157X(*)6R3C2(#)	9.4	6	0.6
220.0	C	790D227X(*)6R3C2(#)	13.8	6	0.6
330.0	D	790D337X(*)6R3D2(#)	20.7	8	0.4
$U_R = 10$ V AT + 85 °C, SURGE = 13 V			$U_C = 6.3$ V AT + 125 °C, SURGE = 8 V		
4.7	A	790D475X(*)010A2(#)	1.0	6	4.0
15.0	A	790D156X(*)010A2(#)	1.5	6	2.5
33.0	B	790D336X(*)010B2(#)	3.3	6	1.3
47.0	B	790D476X(*)010B2(#)	4.7	6	1.4
68.0	B	790D686X(*)010B2(#)	6.8	6	1.3
100.0	C	790D107X(*)010C2(#)	10.0	6	0.6
150.0	C	790D157X(*)010C2(#)	15.0	6	0.6
220.0	D	790D227X(*)010D2(#)	22.0	8	0.4
$U_R = 16$ V AT + 85 °C, SURGE = 20 V			$U_C = 10$ V AT + 125 °C, SURGE = 13 V		
2.2	A	790D225X(*)016A2(#)	1.0	6	5.5
3.3	A	790D335X(*)016A2(#)	1.0	6	4.4
10.0	A	790D106X(*)016A2(#)	1.6	6	2.7
15.0	B	790D156X(*)016B2(#)	2.4	6	1.6
22.0	B	790D226X(*)016B2(#)	3.5	6	1.3
33.0	B	790D336X(*)016B2(#)	5.2	6	1.6
47.0	C	790D476X(*)016C2(#)	7.5	6	0.8
68.0	C	790D686X(*)016C2(#)	10.8	6	0.6
100.0	C	790D107X(*)016C2(#)	16.0	6	0.7
100.0	D	790D107X(*)016D2(#)	16.0	6	0.5
$U_R = 20$ V AT + 85 °C, SURGE = 26 V			$U_C = 13$ V AT + 125 °C, SURGE = 16 V		
2.2	A	790D225X(*)020A2(#)	1.0	6	5.5
6.8	A	790D685X(*)020A2(#)	1.3	6	3.5
15.0	B	790D156X(*)020B2(#)	3.0	6	1.5
22.0	B	790D226X(*)020B2(#)	4.4	6	2.1
47.0	C	790D476X(*)020C2(#)	9.4	6	0.7
68.0	C	790D686X(*)020C2(#)	13.6	6	0.8
100.0	D	790D107X(*)020C2(#)	20.0	6	0.7

Extended Ratings in bold print

(*) Insert 0 for ± 20 % tolerance or 9 for ± 10 %

#) See order information, packaging code

Resin-Molded, Radial-Lead
Solid Tantalum Capacitors

Vishay Sprague

STANDARD/EXTENDED RATINGS					
CAPACITANCE C_R (μF)	CASE CODE	PART NUMBER	MAX. DCL at + 25 °C (μA)	MAX. DF 120 Hz, at + 25 °C (%)	MAX. IMPEDANCE 100 kHz, at + 25 °C (Ω)
U_R = 25 V AT + 85 °C, SURGE = 32 V			U_C = 16 V AT + 125 °C, SURGE = 20 V		
1.5	A	790D155X(*)025A2(#)	1.0	6	6.0
4.7	A	790D475X(*)025A2(#)	1.1	6	4.5
10.0	B	790D106X(*)025B2(#)	2.5	6	1.6
15.0	B	790D156X(*)025B2(#)	3.7	6	2.4
22.0	B	790D226X(*)025B2(#)	5.5	6	2.1
33.0	C	790D336X(*)025C2(#)	8.2	6	0.8
U_R = 35 V AT + 85 °C, SURGE = 45 V			U_C = 23 V AT + 125°C, SURGE = 29 V		
3.3	A	790D335X(*)035A2(#)	1.2	6	6.0
10.0	B	790D106X(*)035B2(#)	3.5	6	2.6
33.0	C	790D336X(*)035C2(#)	11.6	6	1.3
U_R = 40 V AT + 85 °C, SURGE = 52 V			U_C = 25 V AT + 125 °C, SURGE = 32 V		
0.10	A	790D104X(*)040A2(#)	1.0	6	30
0.33	A	790D334X(*)040A2(#)	1.0	6	14
0.47	A	790D474X(*)040A2(#)	1.0	6	11
1.0	A	790D105X(*)040A2(#)	1.0	6	6.5
1.5	B	790D155X(*)040B2(#)	1.0	6	5.2
2.2	B	790D225X(*)040B2(#)	1.0	6	4.0
3.3	B	790D335X(*)040B2(#)	1.3	6	2.8
4.7	B	790D475X(*)040B2(#)	1.8	6	2.0
6.8	B	790D685X(*)040B2(#)	2.7	6	1.6
10.0	C	790D106X(*)040C2(#)	4.0	6	1.3
15.0	C	790D156X(*)040C2(#)	6.0	6	1.0
22.0	C	790D226X(*)040C2(#)	8.8	6	0.8
U_R = 50 V AT + 85 °C, SURGE = 65 V			U_C = 32 V AT + 125 °C, SURGE = 41 V		
0.10	A	790D104X(*)050A2(#)	1.0	6	30
0.15	A	790D154X(*)050A2(#)	1.0	6	24
0.22	A	790D224X(*)050A2(#)	1.0	6	18
1.0	A	790D105X(*)050A2(#)	1.0	6	6.5
1.5	B	790D155X(*)050B2(#)	1.0	6	5.2
2.2	B	790D225X(*)050B2(#)	1.1	6	4.0
3.3	B	790D335X(*)050B2(#)	1.6	6	2.8
4.7	B	790D475X(*)050B2(#)	2.3	6	2.0
6.8	C	790D685X(*)050C2(#)	3.4	6	1.6
10.0	C	790D106X(*)050C2(#)	5.0	6	1.3
15.0	C	790D156X(*)050C2(#)	7.5	6	1.0





Extended Ratings in bold print

(*) Insert 0 for ± 20 % tolerance or 9 for ± 10 %



#) See order information, packaging code



MAXIMUM PERMISSIBLE RIPPLE VOLTAGE AT + 25 °C

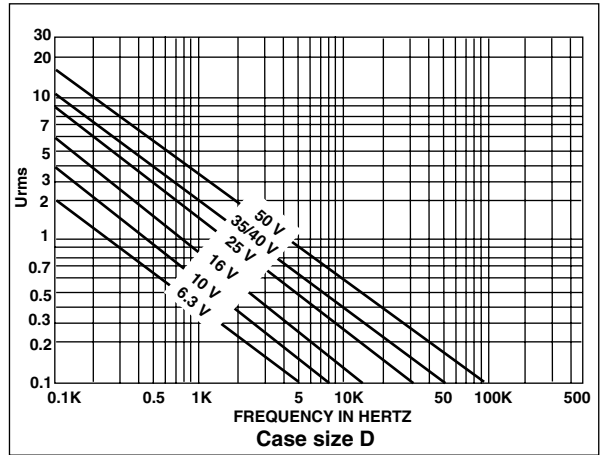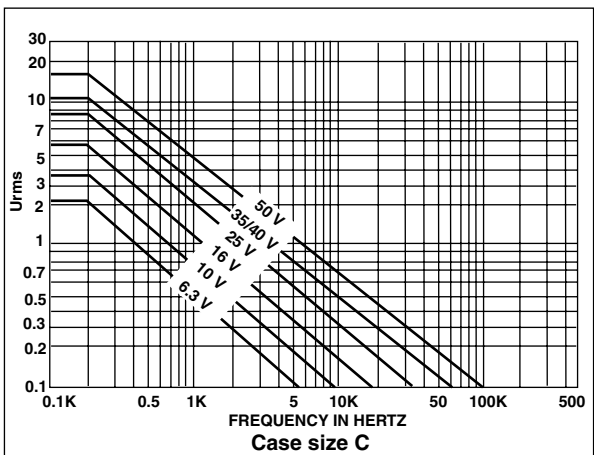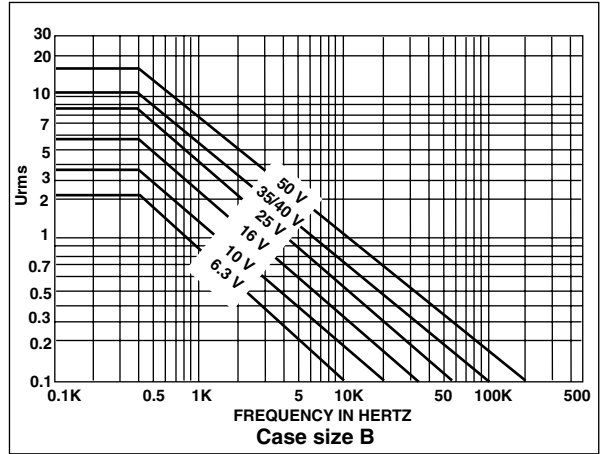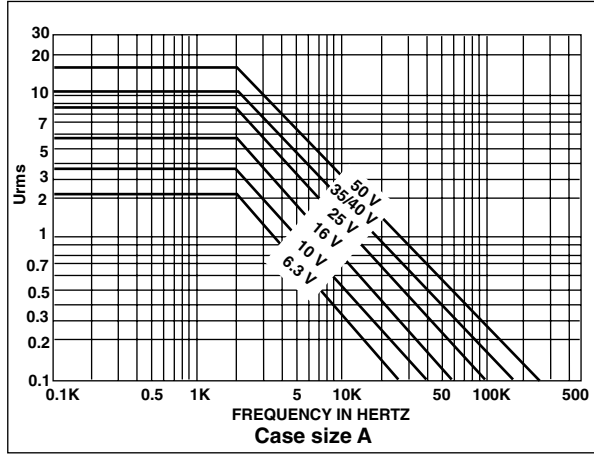

TYPICAL CURVES OF IMPEDANCE VS FREQUENCY

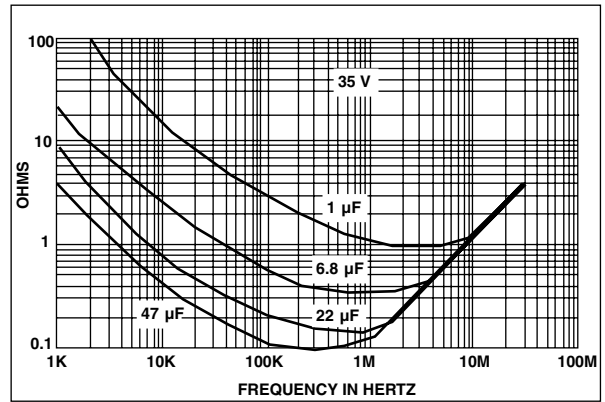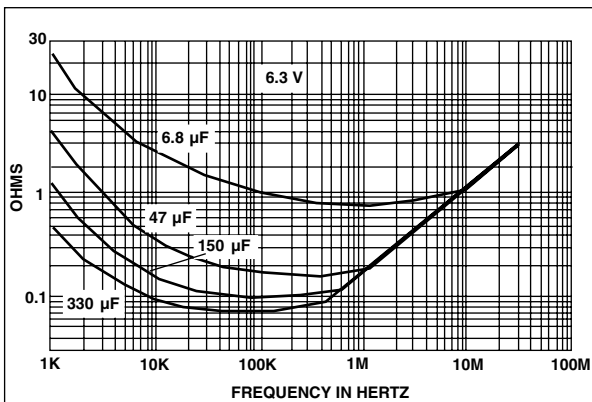



Resin-Molded, Radial-Lead
Solid Tantalum Capacitors

Vishay Sprague


PERFORMANCE CHARACTERISTICS

1. **Operating Temperature:** - 55 °C to + 85 °C with rated voltage U_R applied. + 85 °C to + 125 °C with linear voltage derating to category voltage U_C (see general information) applied.
2. **Capacitance and Tolerance:**
Capacitance measured at 100 Hz and + 25 °C shall be within the specified tolerance limits of the nominal rating
3. **Reverse Voltage:** 15 % of rated voltage at + 25 °C
5 % of rated voltage at + 85 °C
4. **Surge Voltage:** 130 % of U_R at + 85 °C
130 % of U_C at + 125 °C
5. **Impedance at 100 kHz:** Measured at + 20 °C ± 5 °C, impedance shall not exceed the values listed in data sheet.
6. **Stability at low and high temperatures**
Capacitance change with temperature, dissipation factor and DC leakage current shall not exceed the limits of the following table.
7. **Life Test:** 2000 hours at + 85 °C with rated voltage applied 2000 hours at + 125 °C. with category voltage applied
 $\Delta C/C \leq 10\%$ of initial value
 $IL \leq 1.25$ initial limit
 $DF \leq$ initial limit
8. **Humidity Test:** 56 days at + 40 °C, 90 % relative humidity
 $\Delta C/C \leq 8\%$ of initial value
 $IL \leq$ initial limit
 $DF \leq$ initial limit
- **Charge and Discharge Test:**
1 million cycles at + 85 °C,
0.5 s charge at U_R
0.5 s discharge
Series resistance < 0.5 Ω
 $\Delta C/C \leq 5\%$ of initial value
 $IL \leq$ initial limit
 $DF \leq$ initial limit
10. **Marking:**
Top: Rating and polarity
Front: Type, date code, SPRAGUE trademark

TEMP-ERATURE	CAPACITANCE CHANGE $C_R U_R \leq 1900$ $C_R U_R > 1900$	DISSIPATION FACTOR I_L	LEAKAGE CURRENT
- 55 °C	- 10 %	9 % 11 %	-
+ 25 °C	-	6 % 8 %	0.01 $C_R \times U_R$ or 1 μA whichever is greater
+ 85 °C	+ 12 %	9 % 11 %	0.1 $C_R \times U_R$ or 10 μA whichever is greater
+ 125 °C	+ 15 %	12 % 14 %	0.125 $C_R \times U_R$ or 12.5 μA whichever is greater

TAPE AND REEL PACKING

A and B Cases only (Meets IEC 286-2)

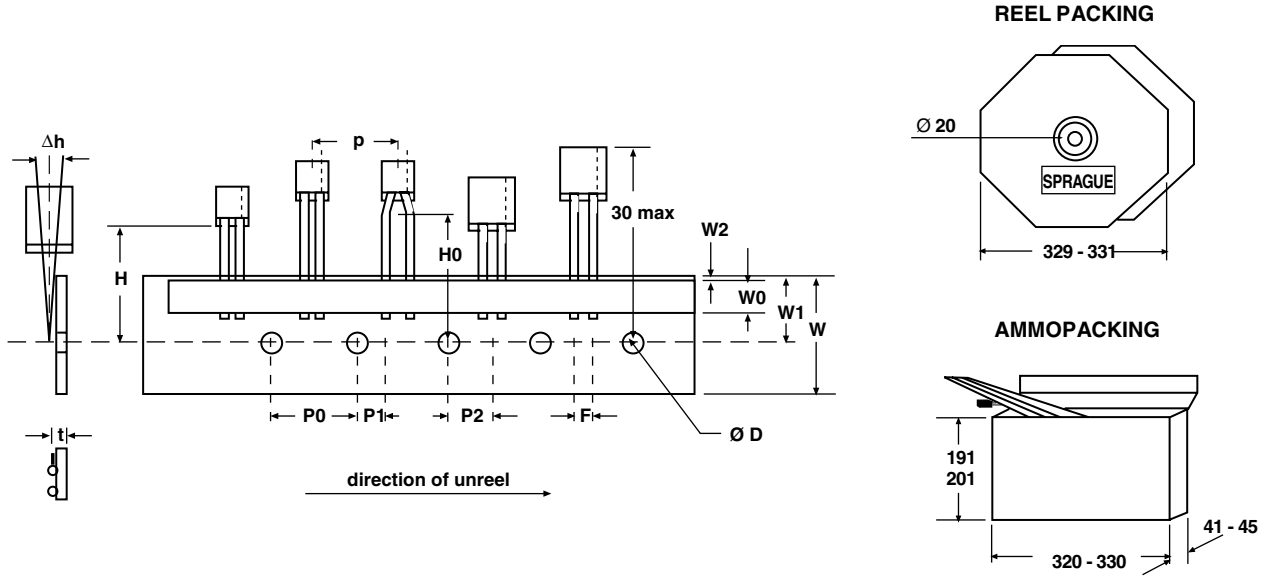

CASE CODE	TAPE WIDTH	DIMENSIONS (mm) /UNITS PER REEL		
Pitch of component	P [mm]	12.7 ± 1.0		
Feed hole pitch	P0 [mm]	12.7 ± 0.3		
Tape width	W [mm]	18 (+ 1 / - 0.5)		
Hold down tape width	W0 [mm]	5.0		
Hole position	W1 [mm]	9 (+ 0.75 / - 0.5)		
Hold down tape position	W2 [mm]	0 (+ 3 / - 0)		
Feed hole diameter	D0 [mm]	4.0 ± 0.3		
Tape thickness	T [mm]	0.5 ± 0.2		
Component alignment	Δh [mm]	0 ± 2		
Lead clinch height	H0 [mm]	16.0 ± 0.5		
Hole center to component center	P2 [mm]	6.35 ± 1.3		
Lead wire spacing Feed hole center to wire center	F [mm] P1 [mm]	Case A 2.5 + 0.6, - 0.1 5.1 ± 0.7	Case B 5 + 0.6, - 0.1 3.85 ± 0.7	Case B 5 + 0.6, - 0.1 3.85 ± 0.7
Reel pack options	H = 16.5 mm H = 18.5 mm	X Y	Z	X Y
Ammopack options	H = 16.5 mm H = 18.5 mm	G H	I	G H
Quantity per reel / box		1000	1000	1000



Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.