



THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTIONS IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.



REVISIONS			
REV	DESCRIPTION	DATE	CHANGED BY
A	RELEASED TO PRODUCTION	8/27/01	J. CARRICK
B	ECO 332: UPDATE DWG FORMAT	1/20/08	L. GRIFFIN

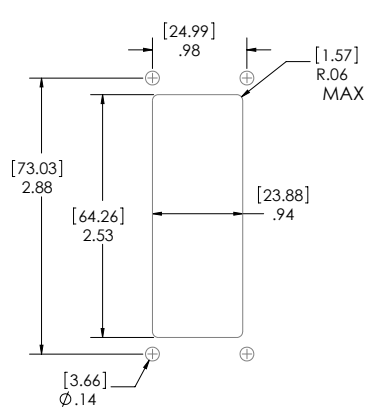

RECOMMENDED PANEL OPENING

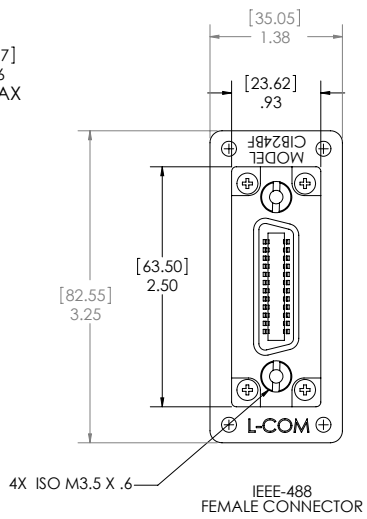

IEEE-488 FEMALE CONNECTOR

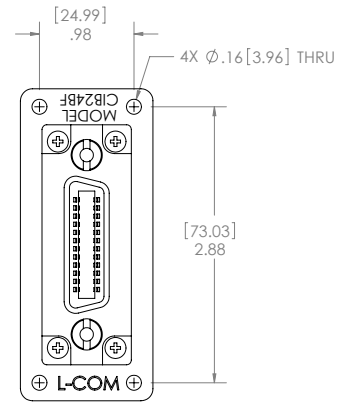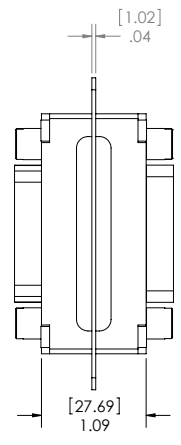

IEEE-488 FEMALE CONNECTOR

NOTES:

1. MATERIAL: HOUSING: CAST ALUMINUM, INSULATOR; GLASS FILLED PBT (BLUE) U.L. 94V-0 FLAMMABILITY RATING.
2. MOUNTING FLANGE: FIBER GLASS FILLED THERMOSETTING RESIN.
3. FINISH: HOUSING; NICKEL PLATED. CONTACTS; 15 MICRO INCHES GOLD PLATE.
4. WIRING: STRAIGHT THRU.
5. TWO DUST CAPS PROVIDED WITH ADAPTOR.

PACKAGING:

INDIVIDUALLY PACKAGE IN A POLYBAG

RoHS Compliant ✓

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES (mm)	APPROVALS	DATE
OVERALL CABLE LENGTH TOLERANCE: +12 (305) -0 (0) / 1.0 (25.4) +60 (1524) ±100 (2540) ±.4 / .2 +10 (254) ±.02 (0.51) ±.2 / .0 ±.01 (0.25)	DRAWN BY J. CARRICK	8/17/2001
ALL OTHER DIMENSIONAL TOLERANCES: X = .3 XX = .15	CHECKED BY DICKO PARRAMA	8/27/2001
PROJECTION 	DESIGNED BY C. MCCORMICK	8/27/2001
	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	
	COLOR VARIATIONS MAY OCCUR	

		45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845	
CATEGORY IEEE-488 GPIB		PRODUCT DESCRIPTION ADAPTOR, GPIB BULKHEAD, F/F	
DWG. NO. B 43321	CIB24BF	REV. B	SCALE: 1:1 CAD FILE: CIB24BF.DWG
SHEET 1 OF 1			