




ALL RIGHTS RESERVED. NO PORTION OF THIS PUBLICATION, WHETHER IN WHOLE OR IN PART CAN BE REPRODUCED WITHOUT THE EXPRESS WRITTEN CONSENT OF SPC TECHNOLOGY.

SPC-F005.DWG




REVISIONS

| DCP # | REV | DESCRIPTION | DRAWN | DATE      | CHECKD | DATE    | APPRVD | DATE    |
|-------|-----|-------------|-------|-----------|--------|---------|--------|---------|
| 1891  | A   | RELEASED    | EO    | 5/18/2006 | SA     | 7/25/06 | HO     | 7/25/06 |


DOC. NO. SPC-F005 \* Effective: 7/8/02 \* DCP No: 1398

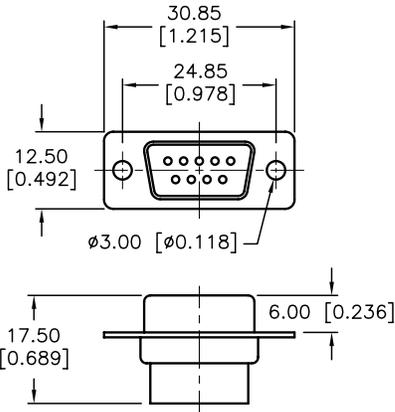



DB9(F)

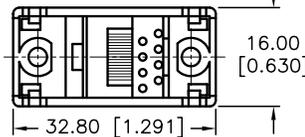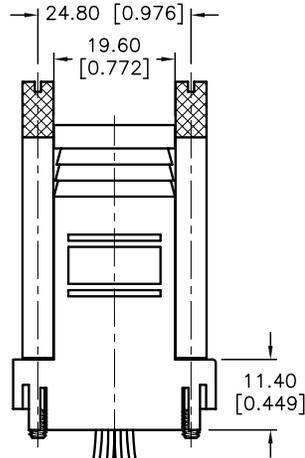

FRONT VIEW OF 6P4C TELEPHONE JACK



WIRE SYSTEM:

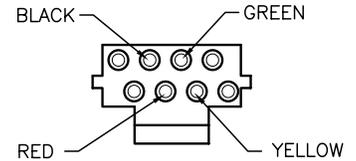

SPECIFICATION:

1. D-Sub Connector: Tin-Plated Shell with Black Color Insulator
2. Contact:
  - a. D-Sub: Brass, Gold-Plated
  - b. RJ11: Brass, Gold-Plated
3. Body: ABS
4. Thumb Screw: Steel, Nickel-plated
5. Electronic Wire: UL1061, 26AWG

DISCLAIMER: ALL STATEMENTS AND TECHNICAL INFORMATION CONTAINED HEREIN ARE BASED UPON INFORMATION AND/OR TESTS WE BELIEVE TO BE ACCURATE AND RELIABLE. SINCE CONDITIONS OF USE ARE BEYOND OUR CONTROL, THE USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT FOR THE INTENDED USE AND ASSUME ALL RISK AND LIABILITY WHATSOEVER IN CONNECTION THEREWITH.

TOLERANCES:  
UNLESS OTHERWISE SPECIFIED,  
FRACTIONS, DECIMALS, ANGLES  
.X ±0.2 [0.008]  
.XX ±0.12 [0.005]

|              |           |
|--------------|-----------|
| DRAWN BY:    | DATE:     |
| EKLAS ODISH  | 5/18/2006 |
| CHECKED BY:  | DATE:     |
| SAMI ALNADI  | 7/25/06   |
| APPROVED BY: | DATE:     |
| HISHAM ODISH | 7/25/06   |

|   |                     |                 |     |
|---|---------------------|-----------------|-----|
| DRAWING TITLE:<br>4C Telephone Adapter, DB9F/RJ11, Plastic, Beige |                     |                 |     |
| SIZE  | DWG. NO.            | ELECTRONIC FILE | REV |
| A   | SPC19785            | 84K8549.DWG     | A   |
| SCALE: NTS  | U.O.M.: mm [INCHES] | SHEET: 1 OF 1   |     |