


ALL RIGHTS RESERVED. NO PORTION OF THIS PUBLICATION, WHETHER IN WHOLE OR IN PART CAN BE REPRODUCED WITHOUT THE EXPRESS WRITTEN CONSENT OF SPC TECHNOLOGY.

REVISIONS		DOC. NO. SPC-F005	Effective 12/21/08	DCP No 890				
DCP #	REV	DESCRIPTION	DRAWN	DATE	CHECKED	DATE	APPRVD	DATE
1959	A	RELEASED	JC	7/13/02	JN	06/11/08	JN	06/11/08

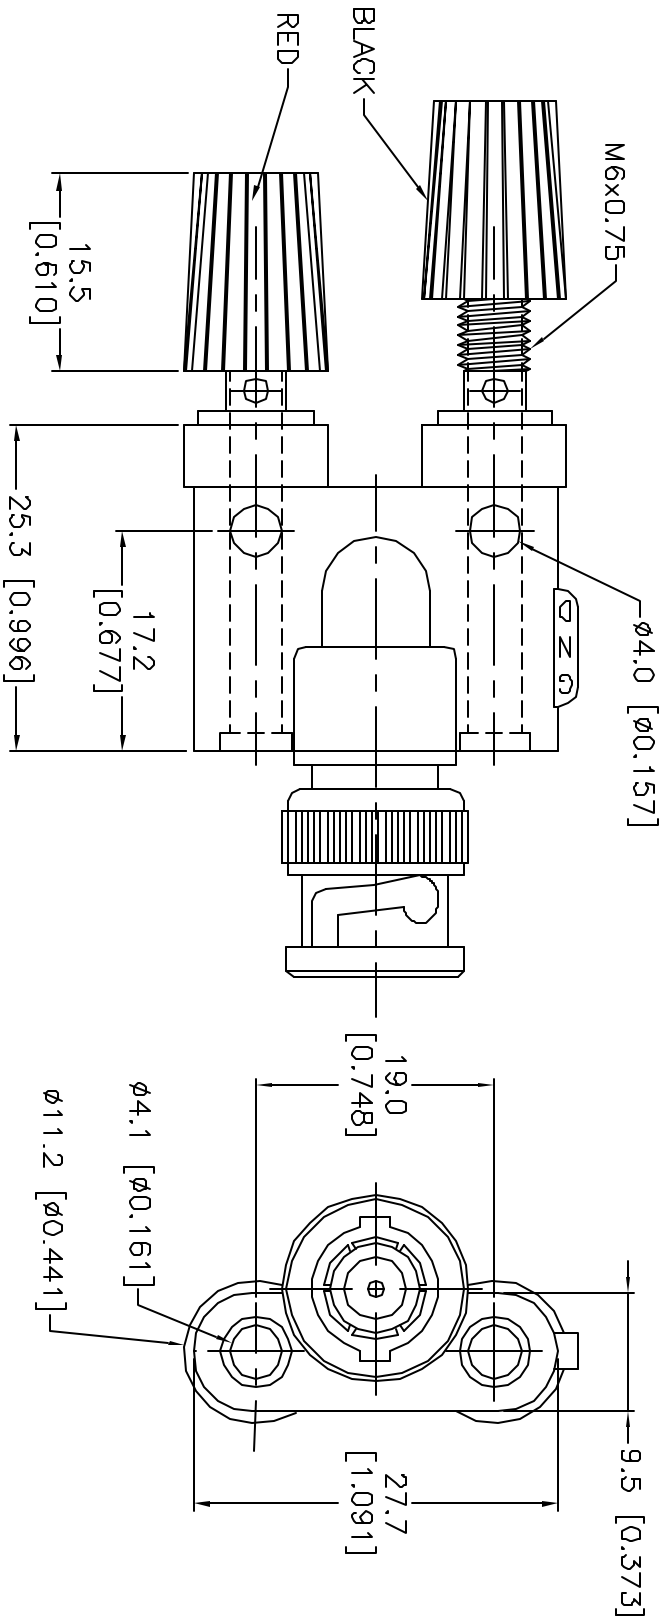

- Material:
1. BNC Male: Brass, Nickel-Plated
 2. BNC Center Contact: Brass, Gold-Plated
 3. BNC Center Insulator: Delrin
 4. Body: PE, Black
 5. Binding Posts: Brass, Nickel-Plated
 6. Knob: Nylon, Black & Red

DISCLAIMER:
 ALL STATEMENTS AND TECHNICAL INFORMATION CONTAINED HEREIN ARE BASED UPON INFORMATION AND/OR TESTS WE BELIEVE TO BE ACCURATE AND RELIABLE. SINCE CONDITIONS OF USE ARE BEYOND OUR CONTROL, THE USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT FOR THE INTENDED USE AND ASSUME ALL RISK AND LIABILITY WHOSOEVER IN CONNECTION THEREWITH.



SPC TECHNOLOGY

DRAWING TITLE: **BNC Male to Dual Binding Posts**

DRAWN BY:	DATE:
JC	7/13/92
CHECKED BY:	DATE:
Jason Nash	06/11/08
APPROVED BY:	DATE:
Jason Nash	06/11/08

SIZE	DWG. NO.	ELECTRONIC FILE	REV
A	SPC20527	02M2076.dwg	B
SCALE:	NTS	U.O.M.: Millimeters [Inches]	SHEET: 1 OF 1

Tolerances Unless
 Otherwise Specified:
 .X=±0.2 [.008]
 .XX=±0.12 [.005]