
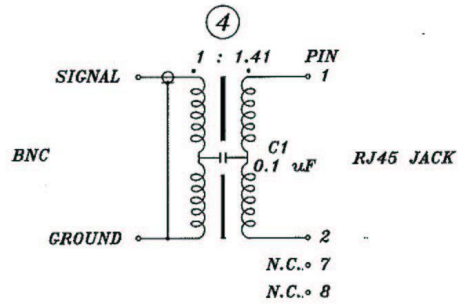




REV.	DESCRIPTION	DATE	APPROVED



System Requirements: Low-capacitance UTP cable  
 \*Maximum Distance: 100.6M(330ft)

ITEM	QTY	DESCRIPTION	REMARK	MATERIAL	FINISH	CONTRACT NO.	APPROVALS	DATE	SIZE	FSCH NO.	DWG NO.	REV.
4	1SET	PCB SET (TRANSFORMER 1 : 1.41, C1 0.1uF)										
3	1SET	RJ45 JACK, GOLD 50u" / PVC WIRE 26AWG UL-1061	ABS UL 94V-0									
2	1SET	PLASTIC SET (TOP, BOTTOM & SIDE COVER)	ABS UL 94V-0									
1	1SET	BNC MALE SOLDER TYPE										
PARTS LIST				DO NOT SCALE DWG.				09/05 05	A4			

UNLESS OTHERWISE SPECIFIED  
 DIMENSIONS ARE IN INCHES  
 TOLERANCES ARE:  
 FRACTIONS DECIMALS ANGLES  
 X ±0.1  
 IX ±0.05 -

CONTRACT NO.  
 APPROVALS  
 DATE  
 DRAWN  
 CHECKED  
 ISSUED  
 BNC BALUN (50Ω : 100Ω)  
 BNC MALE TO RJ45 UNSHIELDED  
 JACK (FOR THIN ETHER NET)  
 SCALE 1 : 1  
 SHEET OF