


Capacitor, tantalum, 0.47 uF, 10% Tol, 25V@85C, A

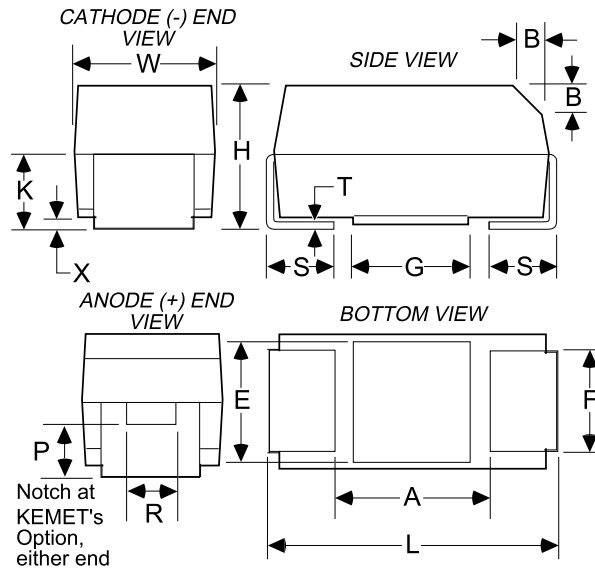

**Dimensions (mm)**

**Specifications**

ID	Dimension	Tolerance	Application:	General Purpose
L	3.20	+/-0.20	<b>Capacitance:</b>	0.47 uF
W	1.60	+/-0.20	<b>Tolerance:</b>	10%
H	1.60	+/-0.20	<b>Voltage DC @ 85C:</b>	25V
K	0.90	+/-0.20	<b>Voltage DC @ 105C:</b>	20.5V
F	1.20	+/-0.10	<b>Voltage DC @ 125C:</b>	16V
S	0.80	+/-0.30	<b>Temperature Range:</b>	-55/+125C
B	0.40	+/-0.15	<b>Size Code:</b>	A
X	0.10	ref	<b>Footprint:</b>	3216
P	0.40	ref	<b>Body Type:</b>	Molded Chip
T	0.13	ref	<b>Packaging:</b>	T&R
A	0.80	ref	<b>Package Quantity:</b>	2000
G	1.10	ref	<b>Termination Type:</b>	Tin (Pb free)
E	1.30	ref	<b>Leakage Current:</b>	0.5 uA
			<b>Dissipation Factor:</b>	4%
			<b>Impedance @ 100kHz:</b>	13 Ohm