




REVISIONS

DOC. NO. SPC-F004 * Effective: 7/8/02 * DCP No: 1398

DCP #	REV	DESCRIPTION	DRAWN	DATE	CHECKD	DATE	APPRVD	DATE
1453	A	Released	JWM	7/9/03	HO	7/23/03	DJC	7/31/03

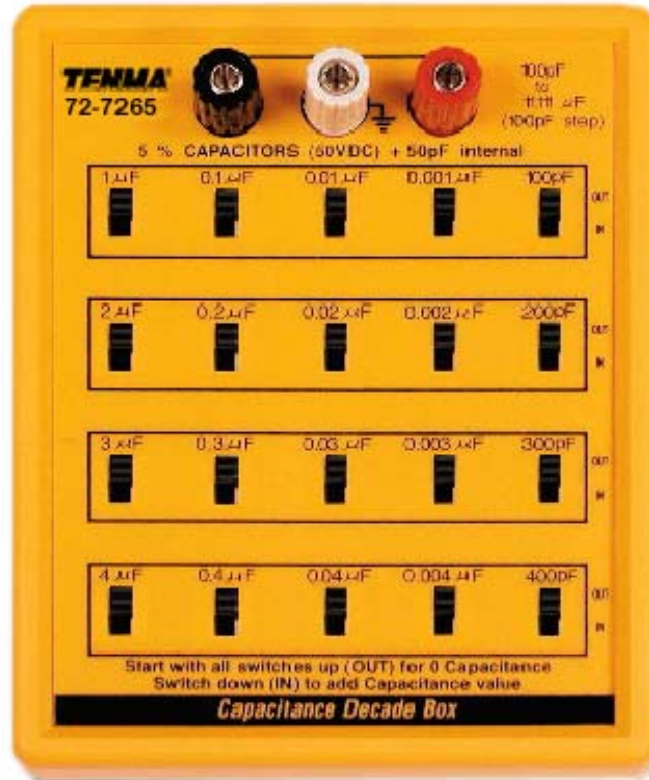

SPECIFICATIONS

- Range: 100pf to 11,111µF (100pF per Step)
- Accuracy: 5% Capacitors used throughout
 - @ <1µF, 1KHz Test Frequency
 - @ ≥ 1µF, 100Hz Test Frequency
- Voltage Limit: 50VDC, Non-Polarized Capacitors
- Internal Residual Capacitance: 50pF max.
- Operating Temperature: 0°C to 50°C [32°F~122°F]
- Operating Humidity: Less than 80% R.H.
- Passive device requires no power source
- Housing: ABS Plastic
- Weight: 304g [0.69lb]
- Dimensions: 14.7cm x 11.7cm x 3.3cm [5.79" x 4.61" x 1.30"]
- Accessories: Owner's Manual

SPC-F004.DWG

TOLERANCES: UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE FOR REFERENCE PURPOSES ONLY.	DRAWN BY:	DATE:	DRAWING TITLE:			
	Jeff McVicker	7/9/03	Pocket-Sized Capacitance Decade Box			
	CHECKED BY:	DATE:	SIZE	DWG. NO.	ELECTRONIC FILE	REV
	Hisham Odish	7/23/03	A	72-7265	22H6398.dwg	A
APPROVED BY:	DATE:	SCALE:	U.O.M.:	SHEET:		
Daniel Carey	7/31/03	NTS	Millimeters [Inches]	1 OF 1		

ALL RIGHTS RESERVED. NO PORTION OF THIS PUBLICATION, WHETHER IN WHOLE OR IN PART CAN BE REPRODUCED WITHOUT THE EXPRESS WRITTEN CONSENT OF SPC TECHNOLOGY. DISCLAIMER: ALL STATEMENTS AND TECHNICAL INFORMATION CONTAINED HEREIN ARE BASED UPON INFORMATION AND/OR TESTS WE BELIEVE TO BE ACCURATE AND RELIABLE. SINCE CONDITIONS OF USE ARE BEYOND OUR CONTROL, THE USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT FOR THE INTENDED USE AND ASSUME ALL RISK AND LIABILITY WHATSOEVER IN CONNECTION THEREWITH.