


SMD Choke Coils

Singapore
Indonesia

Series: **H**
Type: **ELL6□H**

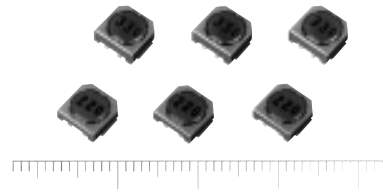

Type ELL6□H

■ Features

- Thin (height 2.5 mm, 3.0 mm)
- Higher reliability in mounting by separated user terminal and internal connection.
- Large current capability

■ Recommended Applications

- Video, Audio, Mobile communications, Electric battery driven equipment
- As a decoupling choke coil in DC-DC converters


■ Cautionary Notes Regarding Usage in DC-DC converters

- Maximum Dissipation of 1 W.
- Maximum case temperature of 105 °C (Ambient & self-heating temperature)




■ Standard Packing Quantity

- 1000 pcs./Reel

■ Explanation of Part Numbers

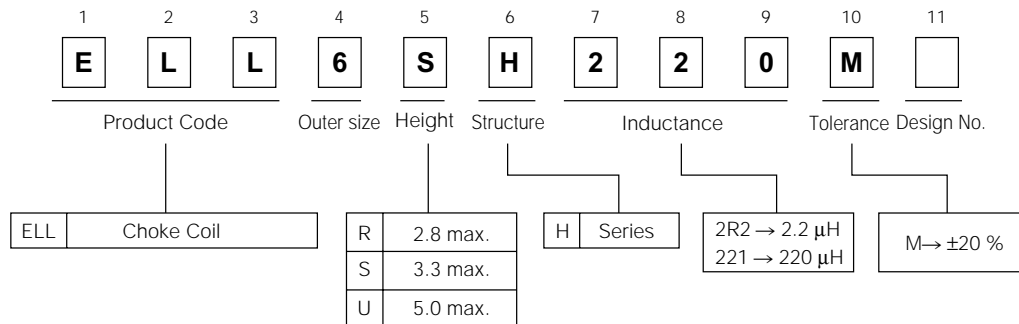


■ Dimensions in mm (not to scale)

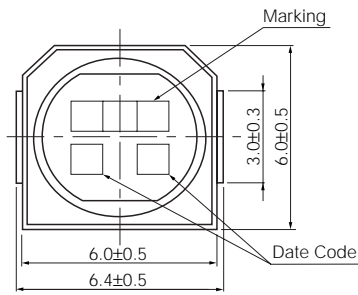


■ Connections (Top view)

■ Recommended Land Pattern in mm (not to scale)



| Type | H |
|--------|---------------|
| ELL6RH | 2.5 mm±0.3 mm |
| ELL6SH | 3.0 mm±0.3 mm |
| ELL6UH | 5.0 mm max. |



■ Standard Parts

| Part No. | Inductance (μH) at 100 kHz Tol. ±20 % | R _{DC} (mΩ) at 20 °C Tol. ±20 % | | * Rated Current (mA) max. | | Marking |
|------------|---|--|------|---------------------------------|------|---------|
| | | 6RH | 6SH | 6RH | 6SH | |
| ELL6□H1R0M | 1.0 | 19 | 19 | 3000 | 3400 | 1R0 |
| ELL6□H1R5M | 1.5 | 24 | 24 | 2400 | 3200 | 1R5 |
| ELL6□H2R7M | 2.7 | 39 | 31 | 1800 | 2400 | 2R7 |
| ELL6□H3R3M | 3.3 | 44 | 34 | 1600 | 2200 | 3R3 |
| ELL6□H4R7M | 4.7 | 49 | 42 | 1580 | 2000 | 4R7 |
| ELL6□H5R1M | 5.1 | 56 | — | 1550 | — | 5R1 |
| ELL6□H5R6M | 5.6 | — | 49 | — | 1800 | 5R6 |
| ELL6□H6R2M | 6.2 | 62 | — | 1400 | — | 6R2 |
| ELL6□H6R8M | 6.8 | — | 52 | — | 1500 | 6R8 |
| ELL6□H7R5M | 7.5 | 80 | — | 1250 | — | 7R5 |
| ELL6□H8R2M | 8.2 | 87 | 61 | 1200 | 1400 | 8R2 |
| ELL6□H100M | 10.0 | 95 | 65 | 1100 | 1300 | 100 |
| ELL6□H120M | 12.0 | 130 | 71 | 1000 | 1200 | 120 |
| ELL6□H150M | 15.0 | 150 | 96 | 850 | 1100 | 150 |
| ELL6□H180M | 18.0 | 170 | 110 | 800 | 1000 | 180 |
| ELL6□H220M | 22.0 | 220 | 140 | 700 | 900 | 220 |
| ELL6□H270M | 27.0 | 260 | 160 | 650 | 800 | 270 |
| ELL6□H330M | 33.0 | 380 | 180 | 600 | 700 | 330 |
| ELL6□H390M | 39.0 | 410 | 240 | 550 | 650 | 390 |
| ELL6□H470M | 47.0 | 480 | 270 | 500 | 600 | 470 |
| ELL6□H560M | 56.0 | 540 | 290 | 450 | 550 | 560 |
| ELL6□H680M | 68.0 | 770 | 520 | 400 | 500 | 680 |
| ELL6□H820M | 82.0 | 870 | 600 | 350 | 450 | 820 |
| ELL6□H101M | 100.0 | 1000 | 680 | 300 | 400 | 101 |
| ELL6□H121M | 120.0 | 1500 | 750 | 280 | 370 | 121 |
| ELL6□H151M | 150.0 | 1800 | 860 | 250 | 350 | 151 |
| ELL6□H181M | 180.0 | 2000 | 1200 | 230 | 300 | 181 |

* Current: This indicates the value of current when the inductance is 80% of nominal value or when the case temperature has risen 45 °C.


Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use.
Should a safety concern arise regarding this product, please be sure to contact us immediately.

Standard Parts


| Part No. | Inductance (μH) at 100 kHz Tolerance $\pm 20\%$ | R_{DC} ($m\Omega$) at 20 °C Tolerance $\pm 20\%$ | * Rated Current (mA) max. | Marking |
|------------|--|--|---------------------------------|---------|
| ELL6UH100M | 10.0 | 63 | 1800 | 100 |
| ELL6UH120M | 12.0 | 71 | 1700 | 120 |
| ELL6UH150M | 15.0 | 79 | 1600 | 150 |
| ELL6UH180M | 18.0 | 88 | 1400 | 180 |
| ELL6UH220M | 22.0 | 98 | 1300 | 220 |
| ELL6UH270M | 27.0 | 110 | 1200 | 270 |
| ELL6UH330M | 33.0 | 130 | 1100 | 330 |
| ELL6UH390M | 39.0 | 150 | 1000 | 390 |
| ELL6UH470M | 47.0 | 160 | 900 | 470 |
| ELL6UH560M | 56.0 | 210 | 800 | 560 |
| ELL6UH680M | 68.0 | 230 | 700 | 680 |
| ELL6UH820M | 82.0 | 260 | 650 | 820 |
| ELL6UH101M | 100.0 | 360 | 600 | 101 |
| ELL6UH121M | 120.0 | 480 | 580 | 121 |
| ELL6UH151M | 150.0 | 680 | 500 | 151 |
| ELL6UH181M | 180.0 | 750 | 470 | 181 |
| ELL6UH221M | 220.0 | 840 | 410 | 221 |
| ELL6UH271M | 270.0 | 1200 | 370 | 271 |
| ELL6UH331M | 330.0 | 1360 | 330 | 331 |
| ELL6UH391M | 390.0 | 1500 | 300 | 391 |
| ELL6UH471M | 470.0 | 1680 | 270 | 471 |
| ELL6UH561M | 560.0 | 2530 | 260 | 561 |
| ELL6UH681M | 680.0 | 2830 | 240 | 681 |
| ELL6UH821M | 820.0 | 3140 | 200 | 821 |
| ELL6UH102M | 1000.0 | 3670 | 180 | 102 |

* Current: This indicates the value of current when the inductance is 80% of nominal value or when the case temperature has risen 45 °C.

Embossed Carrier Tape Dimensions in mm (not to scale)

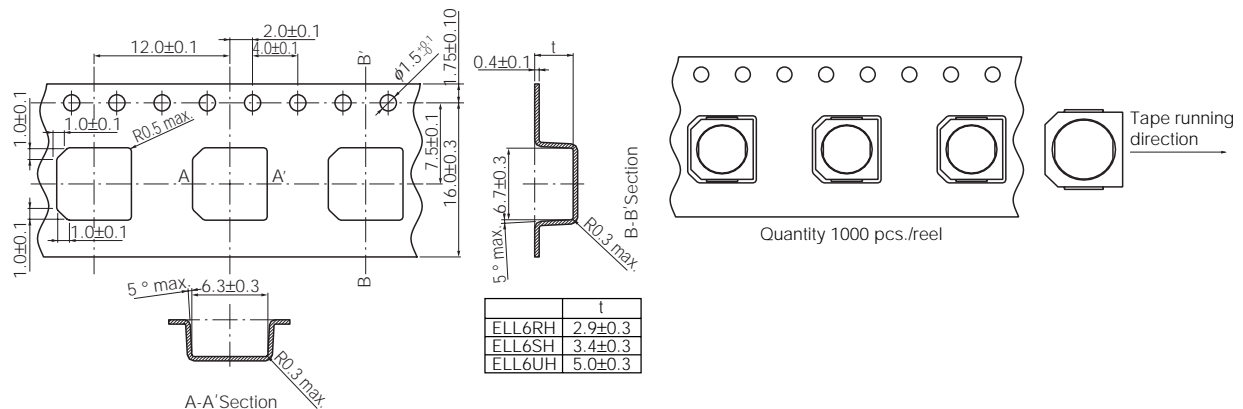

Date code

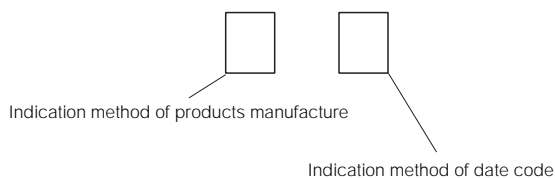

| Year \ Month | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 |
|--------------|----------|---|---|---|---|---|---|---|---|----|----|----|
| | Odd year | A | B | C | D | E | F | H | I | J | K | L |
| Even year | N | O | P | R | S | T | U | V | W | X | Y | Z |

Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use. Should a safety concern arise regarding this product, please be sure to contact us immediately.