Panasonic



Power Choke Coil

Japan Singapore

Series: PCC-M0754M (MC) PCC-M0854M (MC)

High heat resistance, high reliability in a thin and small size power choke coil



Industrial Property: patents 17 (pending)

Features

High heat resistance : Operation up to 150 °C

Excellent DC bias characteristics : High flux density capability using ferrous alloy magnetic material

Low buzz noise : New metal composite core technology

High reliability at high temperatures: High vibration tolerance due to newly developed integral construction

High efficiency : Low Roc of winding and low eddy-current loss of the core

■ Recommended Applications

Noise filter for various drive circuitry requiring high temperature operation and large peak current handling capability

DC-DC converters

■ Standard Packing Quantity

• 500 pcs./Reel

■ Explanation of Part Numbers

1	2	3	4	5	6	7	8	9	10	11	12
E	T	Q	Р		M				Y	F	
Product Code Classification Size			 Winding	Inductance			Core	Packaging	Suffix		

■ Standard Parts


		Inducta	ance *1		Rated	DC res		
Dort No	L	.0	L1 (Ref	erence)		Center (mΩ)	Tolerance (%)	Corios
Part No.	(µH)	Tolerance (%)	(µH)	Measurement current (A)	current (A) *2			Series
ETQP5M480YFM	48.0	±20	47.0	1.0	1.0	156	±15	PCC-M0754M
ETQP5M2R5YFK	2.45	±20	2.40	4.5	4.5	7.6	±15	PCC-M0854M

^(*1) Inductance is measured at 100 kHz


^(*2) Case heating current is the value of the current at which the temperature of the coil case rises 15 °C above its initial temperature with T(ambient) = 25 °C




- Performance Characteristics (Reference)
- Inductance vs DC Current

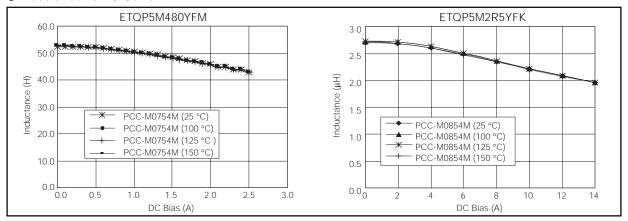


Case Temperature vs DC Current

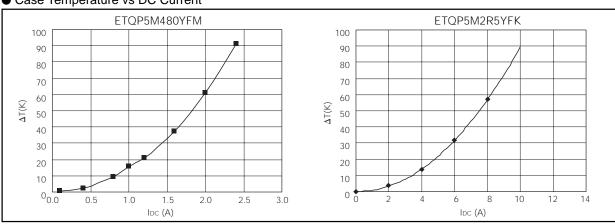

■ Dimensions in mm (not to scale)

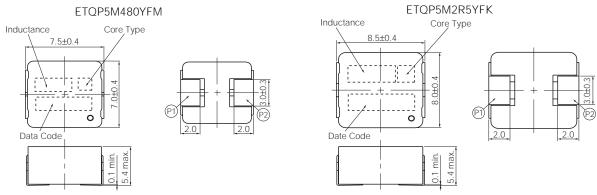

■ Recommended Land Pattern in mm (not to scale)

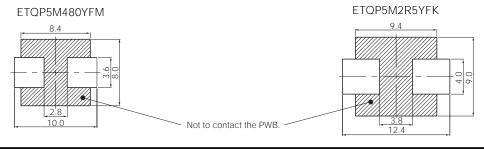

Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use. Should a safety concern arise regarding this product, please be sure to contact us immediately.