


# MLB-3216-0060M4-N2

ELECTRICAL CHARACTERISTICS:

|         | Z @ 100MHz<br>(Ohms) | DCR<br>(Ohms) | Rated<br>Current |
|---------|----------------------|---------------|------------------|
| Nominal | 60                   |               |                  |
| Minimum | 45                   |               |                  |
| Maximum | 75                   | 0.12          | 300mA            |





PHYSICAL DIMENSIONS:


|   |                             |
|---|-----------------------------|
| L | 3.200(0.126) ± 0.200(0.008) |
| W | 1.600(0.063) ± 0.200(0.008) |
| T | 0.800(0.031) ± 0.100(0.004) |
| P | 0.800(0.031) ± 0.100(0.004) |
| E | 0.300(0.012) ± 0.200(0.008) |

NOTES: UNLESS OTHERWISE SPECIFIED

- 1.-All edges and corners must be rounded.
- 2.-Dimensions are in millimeters (inches)
- 3.-Taped and Reeled per current EIA specification.

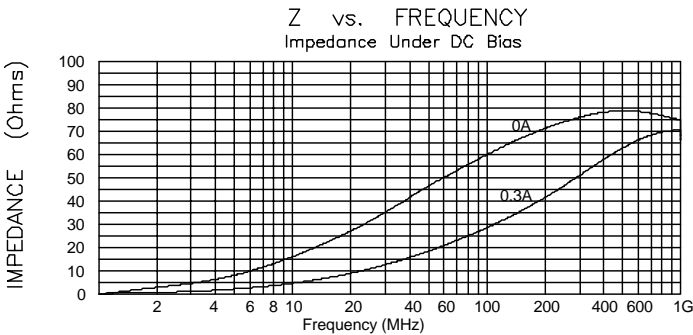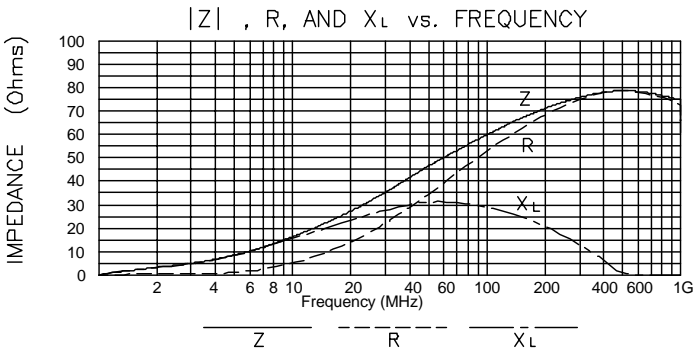

RECOMMENDED SOLDERING CONDITIONS  
Reflow Soldering

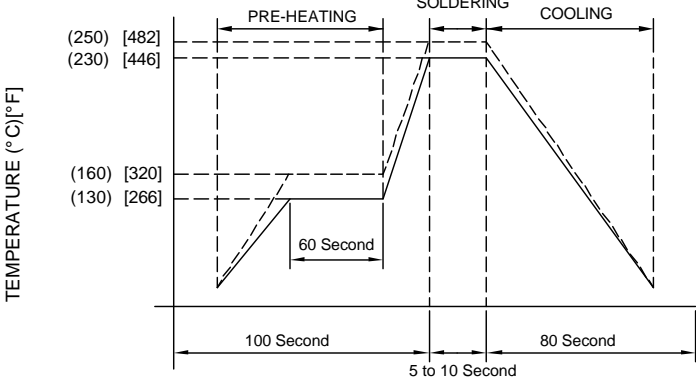

For Sn/Pb=63/37 solder \_\_\_\_\_  
For lead free solder - - - - -

|  |           |      |            |
|--|-----------|------|------------|
|  | APPROVER  | DATE | 28.07.2009 |
|  | M.Umezawa | CFM. |            |