


contact strip

WITH CONDUCTIVE ADHESIVE MOUNT. Used where a concentration of high contact force is needed to assure strong electrical bond; i.e. in a vibrating environment.

Conductive adhesive assures electrical continuity.

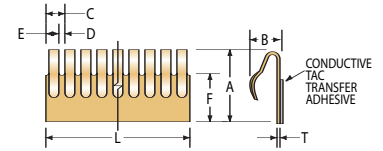

Part Number		A	B	C	D	E	F	T	L	Number of (ref.) Fingers
Bright Copper	Tin Plated									
SG128139CU	SG128139SN	.440 11,2	.160 4,1	.094 2,39	.032 0,81	.062 1,57	.320 8,1	.010 0,25	16.0 406,0	170
SG110310CU	SG110310SN	.480 12,2	.280 7,1	.188 4,78	.064 1,63	.124 3,15	.370 9,4	.006 0,15	16.0 406,0	85